



INSEE 250

INNOVATE BEYOND LIMITS

A safe automation flight experience
with INSEE.



Wingspan
2500mm



Flight time
120-180min



Flight radius
20-150KM



Maximum load
2KG



Maximum speed
108KM/H



Celling height
4800M



Stall protection
redundancy



Altimeter
Soft landing

Contact Us

E-mail: irene.kwan@thaiskyvision.com

Tel. +86-139-2313-1156 (Irene Kwan)

Website <https://www.inseeuav.com>



INSEE-250

INSEE-250 Electric VTOL UAV is a game-changer in the world of unmanned aerial vehicles. With a 2.5hrs flight time (with 1kg payload) and a 2500mm wingspan, it's an ideal tool for long-range surveillance, aerial mapping, and search and rescue missions. This drone's advanced technology and capabilities make it the ultimate tool for professional drone operators. Order now to experience the future of UAVs!

Type	eVTOL fixed wing
Color	White color as default (support customization)
Wingspan	2500mm
Length	1260mm
Belly to Ground	160mm
Battery compartment size	26*15*9cm
Material	Carbon fiber + fiberglass
MTOW	14kg(included batteries)
Max Payload	2kg
Flight time	2.5hrs (1kg payload) / 3hrs (no payload)
Flight Distance	180-270 km
Max Cruising Speed	108km/h (30m/s)

Min Cruising Speed	72km/h (20m/s)
Max Flight Altitude	4800m
Max Wind resistance	14m/s (fixed wing), 8m/s (VTOL)
Battery (Recommended)	2 * 6S 25000-28000mAh HED Li-ion
Working Temperature	-20°C~60°C
IP Grade	IP45
Frequency	2400-2500 MHz / Customize
Transmission Power (EIRP)	20dBm.
GNSS	GPS, GLONASS, GALILEO, BeiDou *Support PPK
COMPASS	2 compass
IMU	ADIS16470, ICM42688-P & ICM20689-P, RM3100

Multi-Sensor Payload



Oblique Camera
Riebo D2M




Medium Format
Camera
Riebo R10P



Full Frame (RGB)
Sony ILX-LR1
24, 35, 50 mm



Laser Scanner (LiDAR)
YellowScan - Mapper Ultra
CHCNAV - AlphaAir 10
GreenValley International - LiAir H600



Multispectral
Micasense
RedEdge-P



Surveillance
br IS-DT, IS-CT


Ground Station INSEE-GCS-1 / INSEE Pilot



Display
10-15 inch

CPU
Intel Core™ i5-i7

Memory
16GB RAM

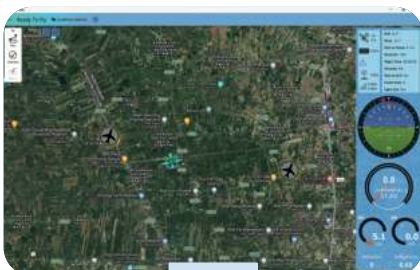

The INSEE-GCS Ground Station is highly customizable, enabling users to adjust features such as display size (10-15 inches), CPU (Intel Core™ i5/i7), memory (up to 16GB), battery capacity (up to 10 hours), contrast ratio (1000:1), brightness (1000cd/m²), refresh rate (60Hz), and IP55 protection. It also offers optional touchscreen functionality to suit specific needs.

The system integrates with **INSEE Pilot** software, offering a user-friendly interface for clear parameter monitoring. It also includes ADS-B functionality, enabling the reception of positional data from certain commercial aircraft for enhanced situational awareness.



Typical mission parameters

for YellowScan Mapper+ OEM and Surveyor Ultra 3 OEM

▶ YellowScan Mapper+ OEM (FOV 70.4° x 4.5°)

FLIGHT SPEED	FLIGHT HEIGHT	POINT DENSITY
23 m/s	100 m AGL	75 pts/m ²
23 m/s	150 m AGL	50 pts/m ²
27 m/s	100 m AGL	64 pts/m ²
27 m/s	150 m AGL	42 pts/m ²
30 m/s	100 m AGL	57 pts/m ²
30 m/s	150 m AGL	38 pts/m ²


▶ YellowScan Surveyor Ultra 3 OEM (FOV 120° x 40.3°)

FLIGHT SPEED	FLIGHT HEIGHT	POINT DENSITY
23 m/s	100 m AGL	27 pts/m ²
23 m/s	150 m AGL	18 pts/m ²
27 m/s	100 m AGL	23 pts/m ²
27 m/s	150 m AGL	15 pts/m ²
30 m/s	100 m AGL	21 pts/m ²
30 m/s	150 m AGL	14 pts/m ²


Mapper+ OEM

Surveyor Ultra 3 OEM

Application



Mapping & Surveying



Power Line Inspection



Forest Research & Rescue



Smart City

Typical pointcloud snapshots.




INSEE-250 eVTOL Fixed Wing

- Platform: YellowScan Ultra 3 OEM
- Area Coverage: 0.35 sq km
- Flight height: 100 m AGL
- Speed: 23 m/s
- Flight time: 15 min



INSEE-250 eVTOL Fixed Wing

- Platform: YellowScan Mapper+ OEM
- Area Coverage: 1.4 sq km
- Flight height: 100 m AGL
- Speed: 23 m/s
- Flight time: 40 min

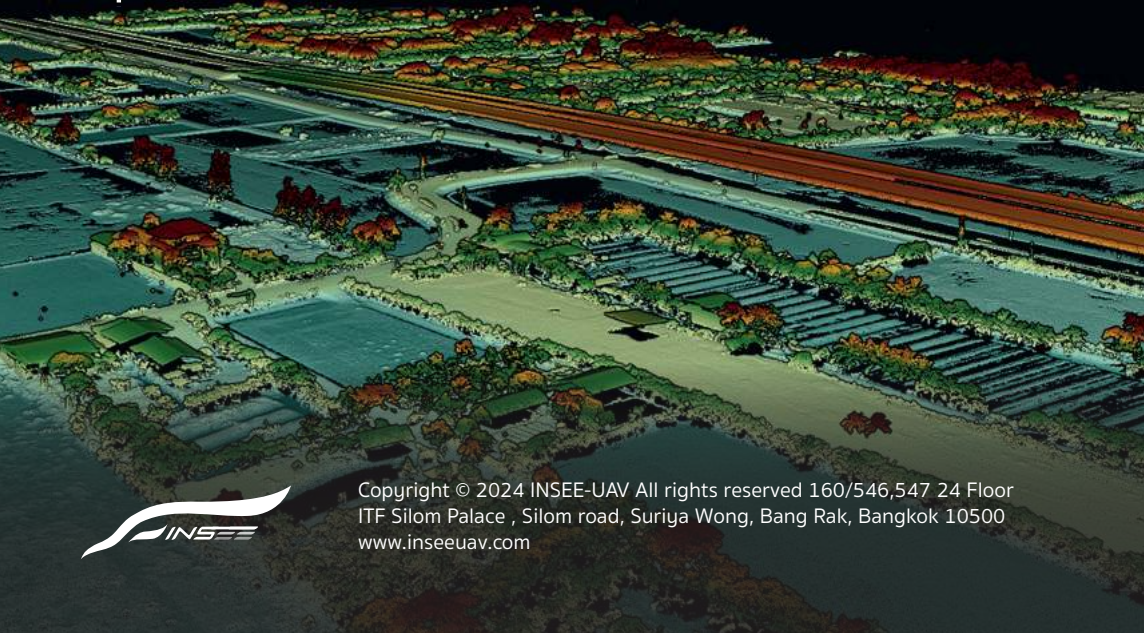

Copyright © 2024 INSEE-UAV All rights reserved 160/546,547 24 Floor
ITF Silom Palace , Silom road, Suriya Wong, Bang Rak, Bangkok 10500
www.inseeuav.com