TYRE RIM - DETAIL DRAWING

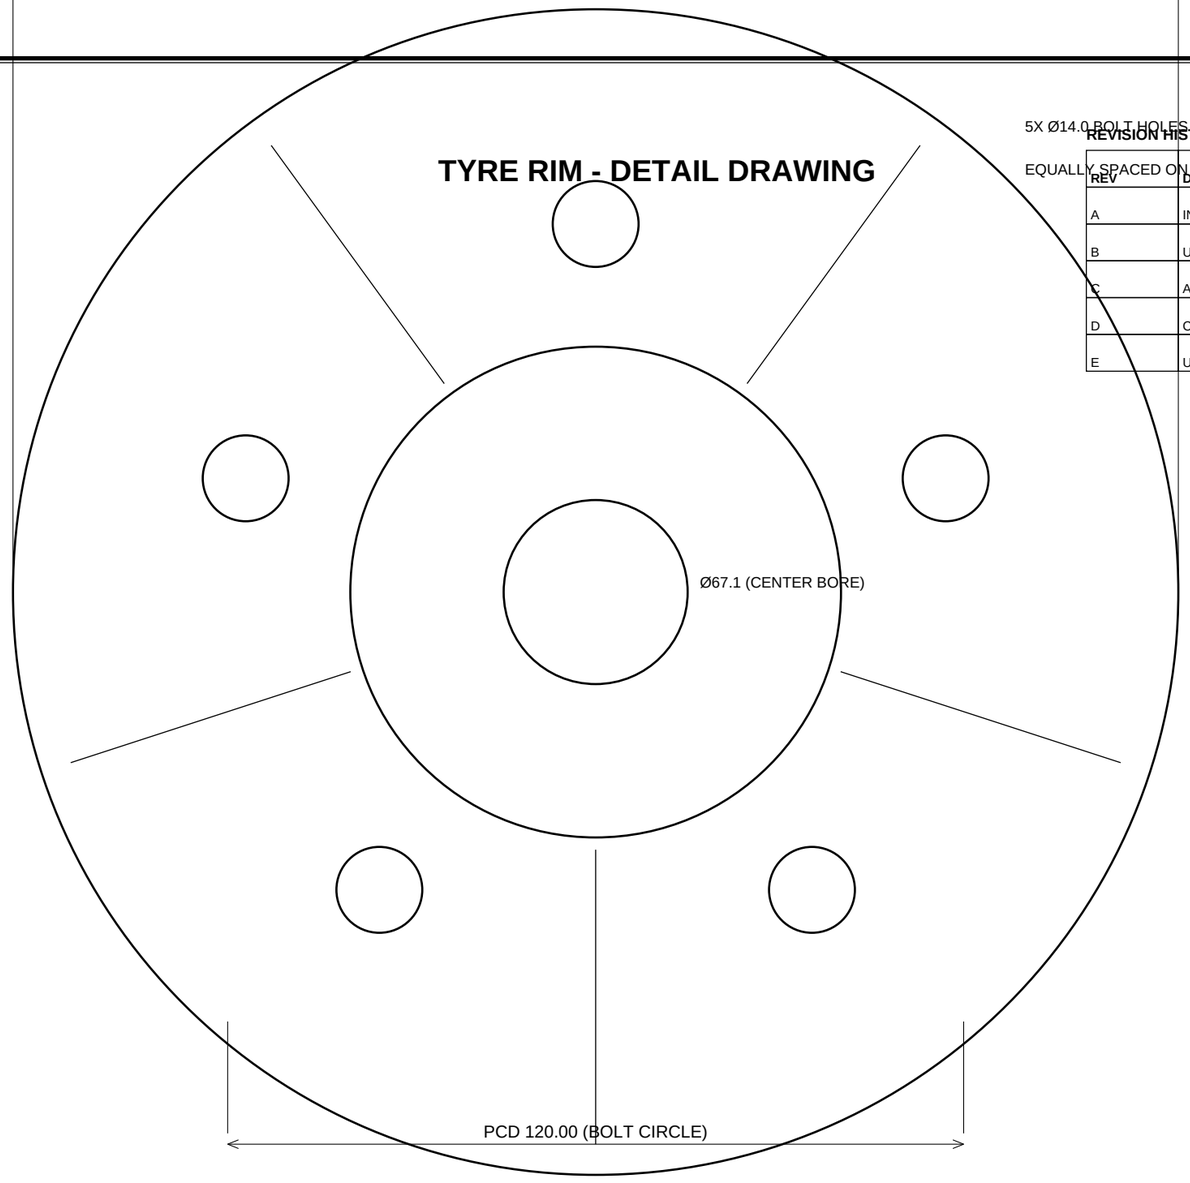

5X Ø14.0 BOLT HOLES

EQUALLY SPACED ON PCD 120

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2025-01-15	JK
B	UPDATED RIM DIA TO 16.00 IN	2025-03-22	JK
C	ADDED BOLT HOLE TOLERANCES	2025-06-10	RD
D	CHANGED SPOKE COUNT FROM 6 TO 5	2025-09-01	JK
E	UPDATED SURFACE FINISH SPEC	2026-01-20	RD

SPECIFICATIONS

PARAMETER	VALUE	TOLERANCE
Rim Diameter	16.00 inches (406.4 mm)	± 0.05 mm
Rim Width	8.00 inches (203.2 mm)	± 0.05 mm
Bolt Pattern	5 x 120 mm PCD	-
Center Bore	Ø67.1 mm	+0.00 / -0.02 mm
Bolt Hole Dia	Ø14.0 mm	± 0.02 mm
Offset (ET)	45.0 mm	± 0.5 mm
Weight (Target)	9.5 kg	± 0.3 kg
Material	Aluminum 6061-T6	-
Surface Finish	Ra 1.6 µm (machined)	-
Number of Spokes	5	-

NOTES:

1. ALL DIMENSIONS IN MM UNLESS OTHERWISE STATED
2. RIM DIAMETER 16 INCHES - VERIFY AGAINST 3D MODEL REF: MDL-TR-001
3. BREAK ALL SHARP EDGES 0.5 mm MAX
4. SURFACE TREATMENT: ANODIZE PER MIL-A-8625 TYPE III

ACME AUTOMOTIVE COMPONENTS PVT. LTD.

PART NAME **TYRE RIM 16 INCH**	DRAWN BY **K. DEEKONDA**
PART NUMBER **TR-16-001**	DATE **2026-03-05**
MATERIAL **Aluminum Alloy 6061-T6**	SCALE **1:2**
REV **E**	SHEET **1 OF 1**