


WHEEL ASSEMBLY - GENERAL ARRANGEMENT

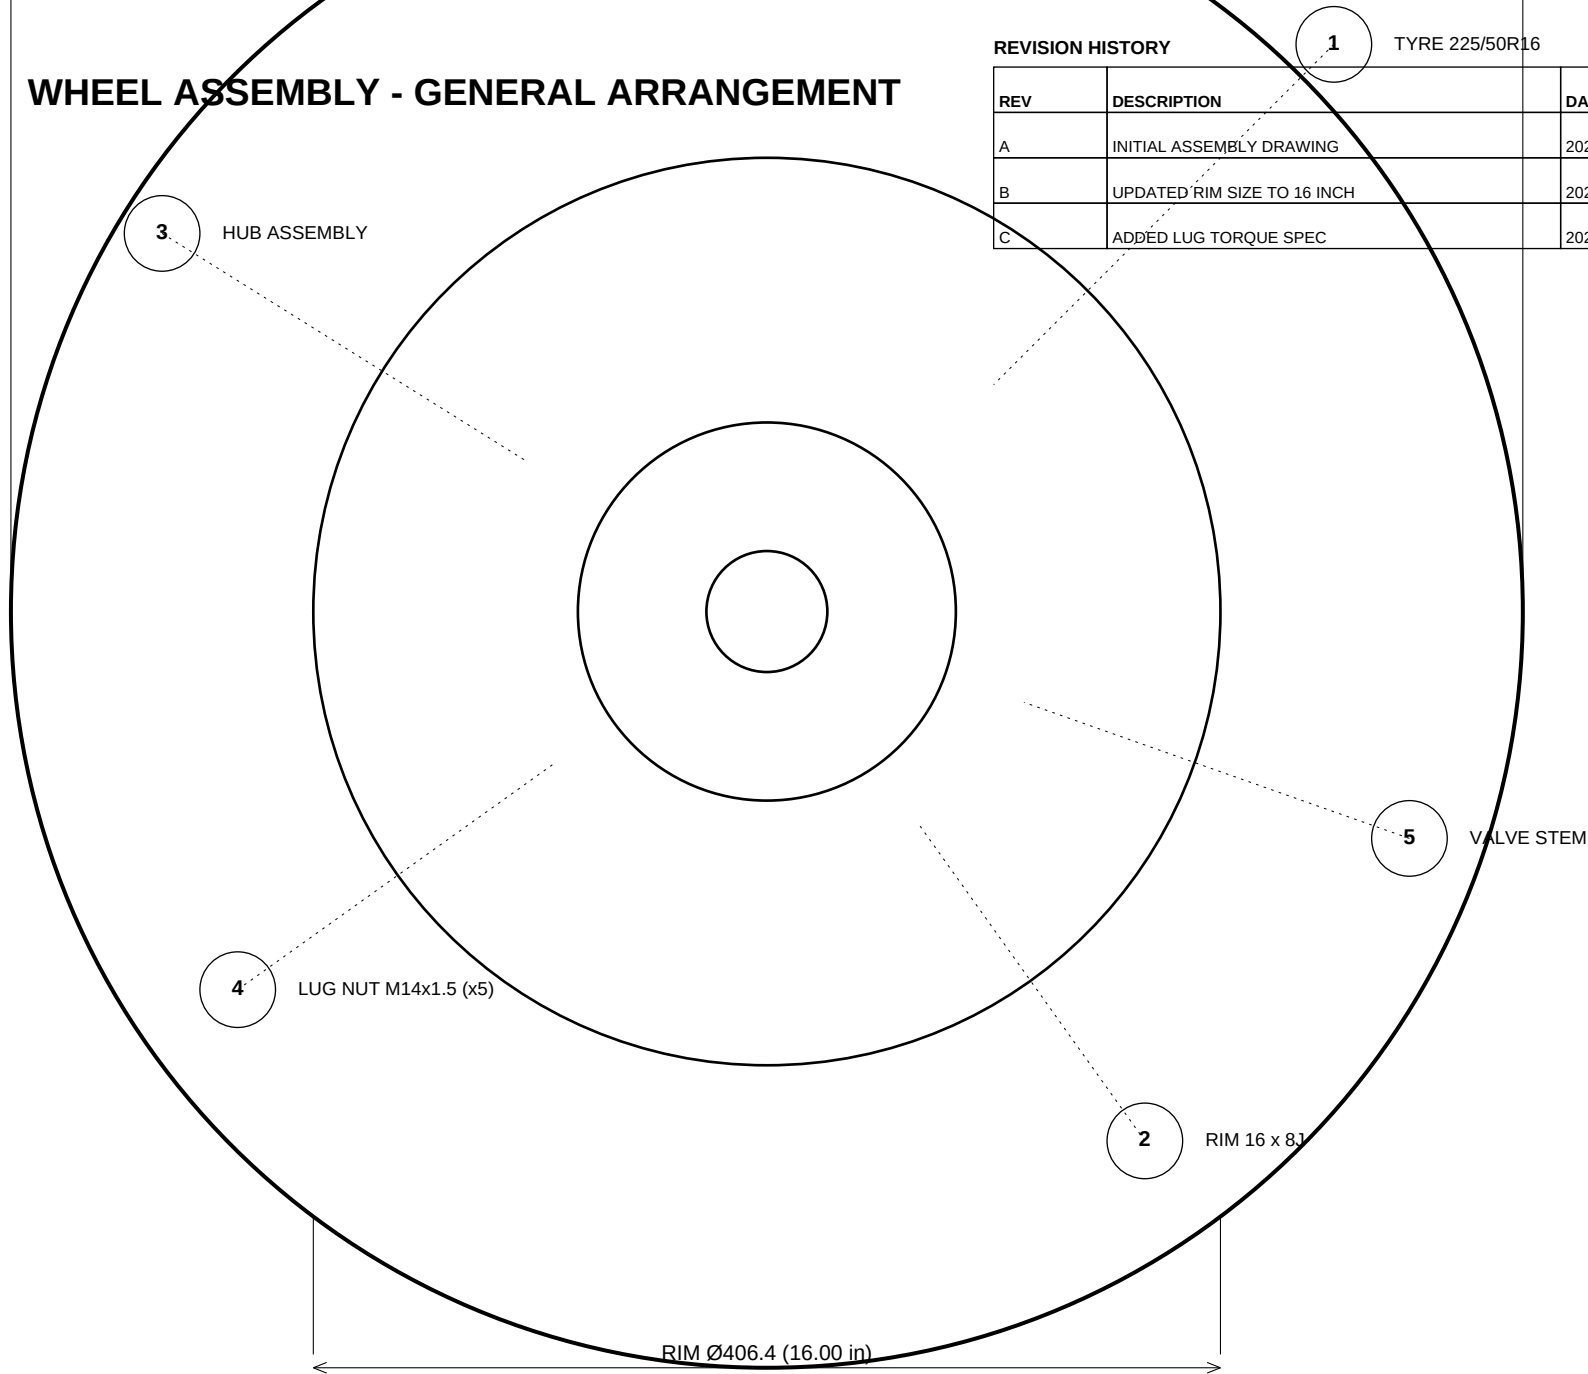

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL ASSEMBLY DRAWING	2025-02-01	JK
B	UPDATED RIM SIZE TO 16 INCH	2025-04-15	RD
C	ADDED LUG TORQUE SPEC	2025-08-20	JK

ASSEMBLY NOTES:

- TYRE TO BE MOUNTED ON 16 INCH RIM WITH BEAD SEALER
- INFLATE TO 32 PSI (2.2 BAR) COLD PRESSURE
- TORQUE LUG NUTS TO 120 Nm IN STAR PATTERN
- VERIFY RIM RUNOUT < 0.5 mm TIR AFTER ASSEMBLY
- WHEEL ASSEMBLY FOR 16 INCH RIM CONFIGURATION ONLY

ACME AUTOMOTIVE COMPONENTS PVT. LTD.

PART NAME WHEEL ASSEMBLY 16 IN	DRAWN BY K. DEEKONDA
PART NUMBER WA-16-001	DATE 2026-03-05
MATERIAL MULTI (SEE BOM)	SCALE 1:2
REV C	SHEET 1 OF 1