DIGITAL TEXTILE PRINTER (4/8 H EPSON i3200)

Auto Cleaning
Longer Life
Stable Printing
High Precision
High Efficiency
High Performance



1800mrn Print Width

i3200-A1 PrintHead Type

Technical *Parameters*

Model	GFX-PG-E4-1.1	GFX-PG-E8-1.1
Print Head	Epson* i3200 - A1	Epson* i3200 - A1
Number of Print Head	4	8
Control System	HonsonSoft	HonsonSoft
Printing Width	1.8m	1.8m
Colors	4/8 Color (CMYK+4) (Optional)	
Speed (m2/h)**	2 Pass (360x720dpi): 65m²/h 4 Pass (360x720dpi): 33m²/h	2 Pass (360x720dpi): 130m²/h 4 Pass (360x720dpi): 64m²/h
Ink Type	Reactive/Disperse/Pigment	
Media Conveyor	Conveyor Belt	
Media Height	2mm	
Carriage Scanning	High Quality Belt Railing System	
Ink Supply	Standard Syphon System	
Feeding System	Inbuilt Take-Up & Feeding System	
Belt Cleaning System	Inbuilt Washing System	
Print Media	Polyester, Pure Cotton, Nylon & Viscose	
RIP Software	NeoStampa (Optional)	
Data Transmission	USB 3.0	
Power	Printer - 17 kW	Printer - 10 kW
Net Weight	1800 kg (Approx)	
Dimension (L x W x H)***	3700(L)mm x 2440(W)mm x 1500(H)mm	
Carriage System	Belt System	

RUDRA ENTERPRISES

B-61, First Floor, Sector-10, Noida (U.P)
Email: colorxpert2020@gmail.com
Mobile : +91-9910208858, 9540496171

* All trademarks mentioned are the property of their respective owners and have been mentioned herein for reference purpose only.

** Maximum speed shown, speed will vary based on size of substrate, carriage speed, number of passes, feather conditions, machine maintenance and other factors.
*** Actual dimensions may vary slightly.

DIGITAL TEXTILE PRINTER (8 H RICOH Gen6)



Auto Cleaning

Longer Life

Stable Printing

High Precision

High Efficiency

High Performance

1850mm Print Width

Ricoh* Gen6 PrintHead Type

Technical *Parameters*

Model	GFX-RE-RG68-2.1
Print Head	Ricoh* Gen6
Number of Print Head	8
Control System	BYHX
Printing Width	1.85m & also available for (2.2m/2.6m)
Colors	8 Color
Speed (m^2/h)**	2 Pass (604x600dpi): 162m^2/h | 3 Pass (604x900dpi): 106m^2/h | 4 Pass (604x1200dpi): 78m^2/h
Ink Type	Reactive/Disperse/Pigment
Media Conveyor	Conveyor Belt
Carriage	Auto. Lifting(3-30mm adjustable)
Media Height	3-5mm
Carriage Scanning	High Precision Magnetic System
Ink Supply	Negative Pressure Ink Delivery System
Feeding System	Modular feeding unit (Up to 400mm diameter)
Water Unit	Sponge + Scraper + Brush + Towel roller
Print Media	Pure Cotton & Viscose
RIP Software	NeoStampa
Data Transmission	USB 3.1
Power	Printer - 220 V, 35 A Single / Three phase load distribution, 50Hz
	Dryer - AC 220 kW, 20 A, 50/60 Hz
Net Weight	1400kg(Approx)
Dimension (L x W x H)***	1780(L)mm x 3180(W)mm x 1640(H)mm
Carriage System	Magnetic Linear Rail

* All trademarks mentioned are the property of their respective owners and have been mentioned herein for reference purpose only.
** Maximum speed shown, speed will vary based on size of substrate, carriage speed, number of passes, feather conditions, machine maintenance and other factors.
*** Actual dimensions may vary slightly.

RUDRA Enterprises

MACHINES



INK



HOT MELT FILM



SERVICE

SPARE PARTS



Grow Your Business With Rudra Enterprises

colorxpert2020@gmail.com

9910208858, 9540496171

B-61, First Floor, Sector-10, Noida (U.P)-201301

DIRECT TO FILM PRINTER















PRODUCT DETAIL DTF

Head type	Epson i3200 2/4 Head	
Numbers of heads	2/4	
Ink type	DTF Pigment Ink	
Colors	CMYK+White	
Speed & Precision	4 Head	2 Head
	4 Pass-30 Sq.Mtr/hr, 6 Pass- 20Sq.Mtr/hr	4 Pass-15 Sq.Mtr/hr, 6 Pass- 9 Sq.Mtr/hr
Print width	Up to 24”	
Weight	DTF Printer	Powder Shaker Machine
	100kg	300kg
Operation system	Win7/Win8/Win10 (64 bit)	
Heat system	Pre/Post Heater(Can be control separately)	
Software	RIIN	
Dimension	**DTF Printer:** Machine:1719*640*1399mm, Package:1875*950*725mm	
	Powder Shaker Machine : Machine:2305*1092*1105mm, Package:2400*1120*1136mm	
Power	DTF Printer	Powder Shaker Machine
	1KW	7.9KW

DIGITAL SUBLIMATION PRINTER (4H EPSON i3200)

Auto Cleaning

Longer Life

Stable Printing

High Precision

High Efficiency

High Performance



1900mm Print Width

i3200-A1 PrintHead Type

Technical *Parameters*

Model	GFX-DS-E4-1.1	
Print Head	Epson* i3200-A1	
Number of Print Head	4	
Printing Resolution	360x1200 dpi	360x1800 dpi
Print Pass	2 Pass	3 Pass
Speed (m2/h)**	95 m²/h	74 m²/h
Colors	4 Color (CMYK)	
Ink Type	Dye Sublimation / Aqueous based Pigmented Inks	
Maximum Print Width	Upto 1900 mm	
Data Transmission Interface	HI-USB 2.0	
RIP Software	NeoStampa	
Media	Sublimation Paper, Decor Paper, Photo Paper, Vinyl Sheet & Sticker	
Ink Capacity	1 Litre per Colour	
Power Parameter	AC 220 V, 50/60 Hz	
Feeding System	Inbuilt Take-Up & Feeding System	
Environmental Requirements	Temperature : 20-35°C | Humidity : 35% - 65%	
Add-ons***	NA	
Loading Roll Capacity	1000m / 30gsm (Paper)	
Net Weight	430 kg (Approx)	
Dimension (L x W x H)****	3100(L)mm x 960(W)mm x 750(H)mm	
Carriage System	Belt System	

* All trademarks mentioned are the property of their respective owners and have been mentioned herein for reference purpose only.
** Maximum speed shown, speed will vary based on size of substrate, carriage speed, number of passes, feather conditions, machine maintenance and other factors.
*** May be available at additional cost.
**** Actual dimensions may vary slightly.

HIGH SPEED DIGITAL SUBLIMATION PRINTER (8H EPSON i3200)

Auto Cleaning

Longer Life

Stable Printing

High Precision

High Efficiency

High Performance



1900mm Print Width

i3200-A1 PrintHead Type

Technical *Parameters*

Model	GFX-DS-E8-1.1	
Print Head	Epson* i3200-A1	
Number of Print Head	8	
Printing Resolution	360x1200dpi	360x2400dpi
Print Pass	1 Pass	2 Pass
Speed (m2/h)**	225 m^2/h	120 m^2/h
Colors	4/8 Color (CMYK+4)	
Ink Type	Dye Sublimation / Aqueous based Pigmented Inks	
Maximum Print Width	Upto 1900mm	
Data Transmission Interface	Ethernet Port	
RIP Software	NeoStampa (Optional)	
Media	Sublimation Paper	
Ink Capacity	10 Litre Refillable tank	
Power Parameter	AC 220 V, 60 A	
Feeding System	Industrial Auto Feeding System with Airshaft & Drive System	
Take-UP System	Industrial Auto Take-Up System with Airshaft & Drive System	
Environmental Requirements	Temperature : 18-30°C | Humidity : 40% - 60%	
Add-ons***	NA	
Loading Roll Capacity	2000m / 31gsm	
Net Weight	700 kg(Approx)	
Dimension (L x W x H)****	3510(L)mm x 1375(W)mm x 1560(H)mm	
Carriage System	Belt System	

RUDRA ENTERPRISES

B-61, First Floor, Sector-10, Noida (U.P)

Email: colorxpert2020@gmail.com

Mobile : +91-9910208858, 9540496171

* All trademarks mentioned are the property of their respective owners and have been mentioned herein for reference purpose only.

** Maximum speed shown, speed will vary based on size of substrate, carriage speed, number of passes, feather conditions, machine maintenance and other factors.

*** May be available at additional cost.

**** Actual dimensions may vary slightly.

High Speed Digital Textile Printer
16H Ricoh Gen6

Auto Cleaning


Longer Life

Stable Printing

High Precision

High Efficiency

High Performance

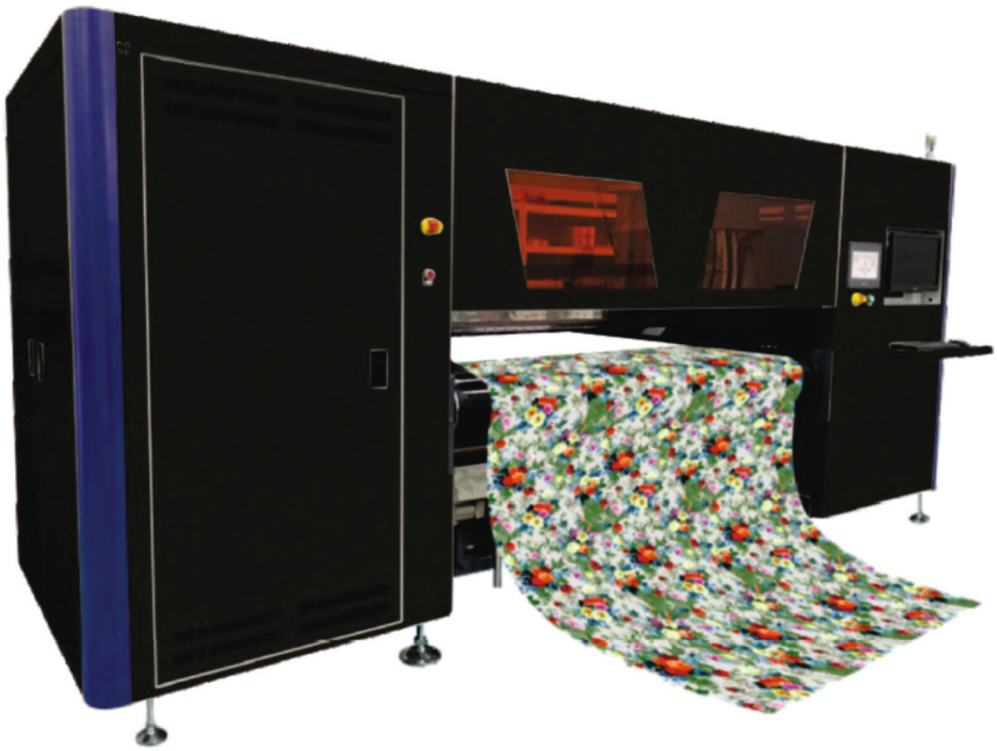

Technical *Parameters*

2000mm
Print Width

Ricoh* Gen6
PrintHead Type

Model	GFX-RE-RG616-1.1
Print Head	Ricoh* Gen6
Number of Print Head	16
Control System	BYHX
Printing Width	2 meter
Colors	4/8 Color
Speed (m2/h)**	2 Pass (508x600dpi): 240m²/h | 3 Pass (508x900dpi): 160m²/h
Ink Type	Reactive/Disperse/Pigment
Media Conveyor	Conveyor Belt
Carriage	Auto. Lifting(3-30mm adjustable)
Media Height	3-5mm
Carriage Scanning	High Precision Magnetic Linear RailerSystem
Ink Supply	Negative Pressure Ink Delivery System
Feeding System	Inflatable Shaft + Tension Bar
Water Unit	Sponge + Scraper + Brush + Towel roller
Print Media	Pure Cotton & Viscose
RIP Software	NeoStampa
Data Transmission	USB 3.0
Power	Printer - 8 kW
	Dryer - 30 kW
Net Weight	3500kg(Approx)
Dimension (L x W x H)***	Printer - 4830(L)mm x 2737(W)mm x 1895(H)mm
	Dryer - 2300(L)mm x 1765(W)mm x 1080(H)mm
Carriage System	Magnetic Linear Rail

* All trademarks mentioned are the property of their respective owners and have been mentioned herein for reference purpose only.
** Maximum speed shown, speed will vary based on size of substrate, carriage speed, number of passes, feather conditions, machine maintenance and other factors.
*** Actual dimensions may vary slightly.

High Speed Digital Textile Printer
16H Kyocera



Technical Parameters

Model	GFX-RE-KY16-2.1
Print Head	Kyocera*
Number of Print Head	16
Control System	BYHX
Printing Width	1.85m & also available for (2.2m/2.6m)
Colors	8 Color
Speed (m^2/h)**	2 Pass (604x600dpi): 324m^2/h | 3 Pass (604x900dpi): 212m^2/h | 4 Pass (604x1200dpi): 156m^2/h
Ink Type	Reactive/Disperse/Pigment
Media Conveyor	Conveyor Belt
Carriage	Auto. Lifting(3-30mm adjustable)
Media Height	3-5mm
Carriage Scanning	High Precision Magnetic System
Ink Supply	Negative Pressure Ink Delivery System
Feeding System	Modular feeding unit (Up to 400mm diameter)
Water Unit	Sponge + Scraper + Brush + Towel roller
Print Media	Pure Cotton & Viscose
RIP Software	NeoStampa
Data Transmission	USB 3.1
Power	Printer - 220 V, 104 A Single / Three phase load distribution, 50Hz
	Dryer - AC 220 kW, 20 A, 50/60 Hz
Net Weight	3500kg(Approx)
Dimension (L x W x H)***	1235(L)mm x 4052(W)mm x 1808(H)mm
Carriage System	Magnetic Linear Rail

RUDRA ENTERPRISES

B-61, First Floor, Sector-10, Noida (U.P)

Email: colorxpert2020@gmail.com

Mobile : +91-9910208858, 9540496171

* All trademarks mentioned are the property of their respective owners and have been mentioned herein for reference purpose only.

** Maximum speed shown, speed will vary based on size of substrate, carriage speed, number of passes, feather conditions, machine maintenance and other factors.

*** Actual dimensions may vary slightly.