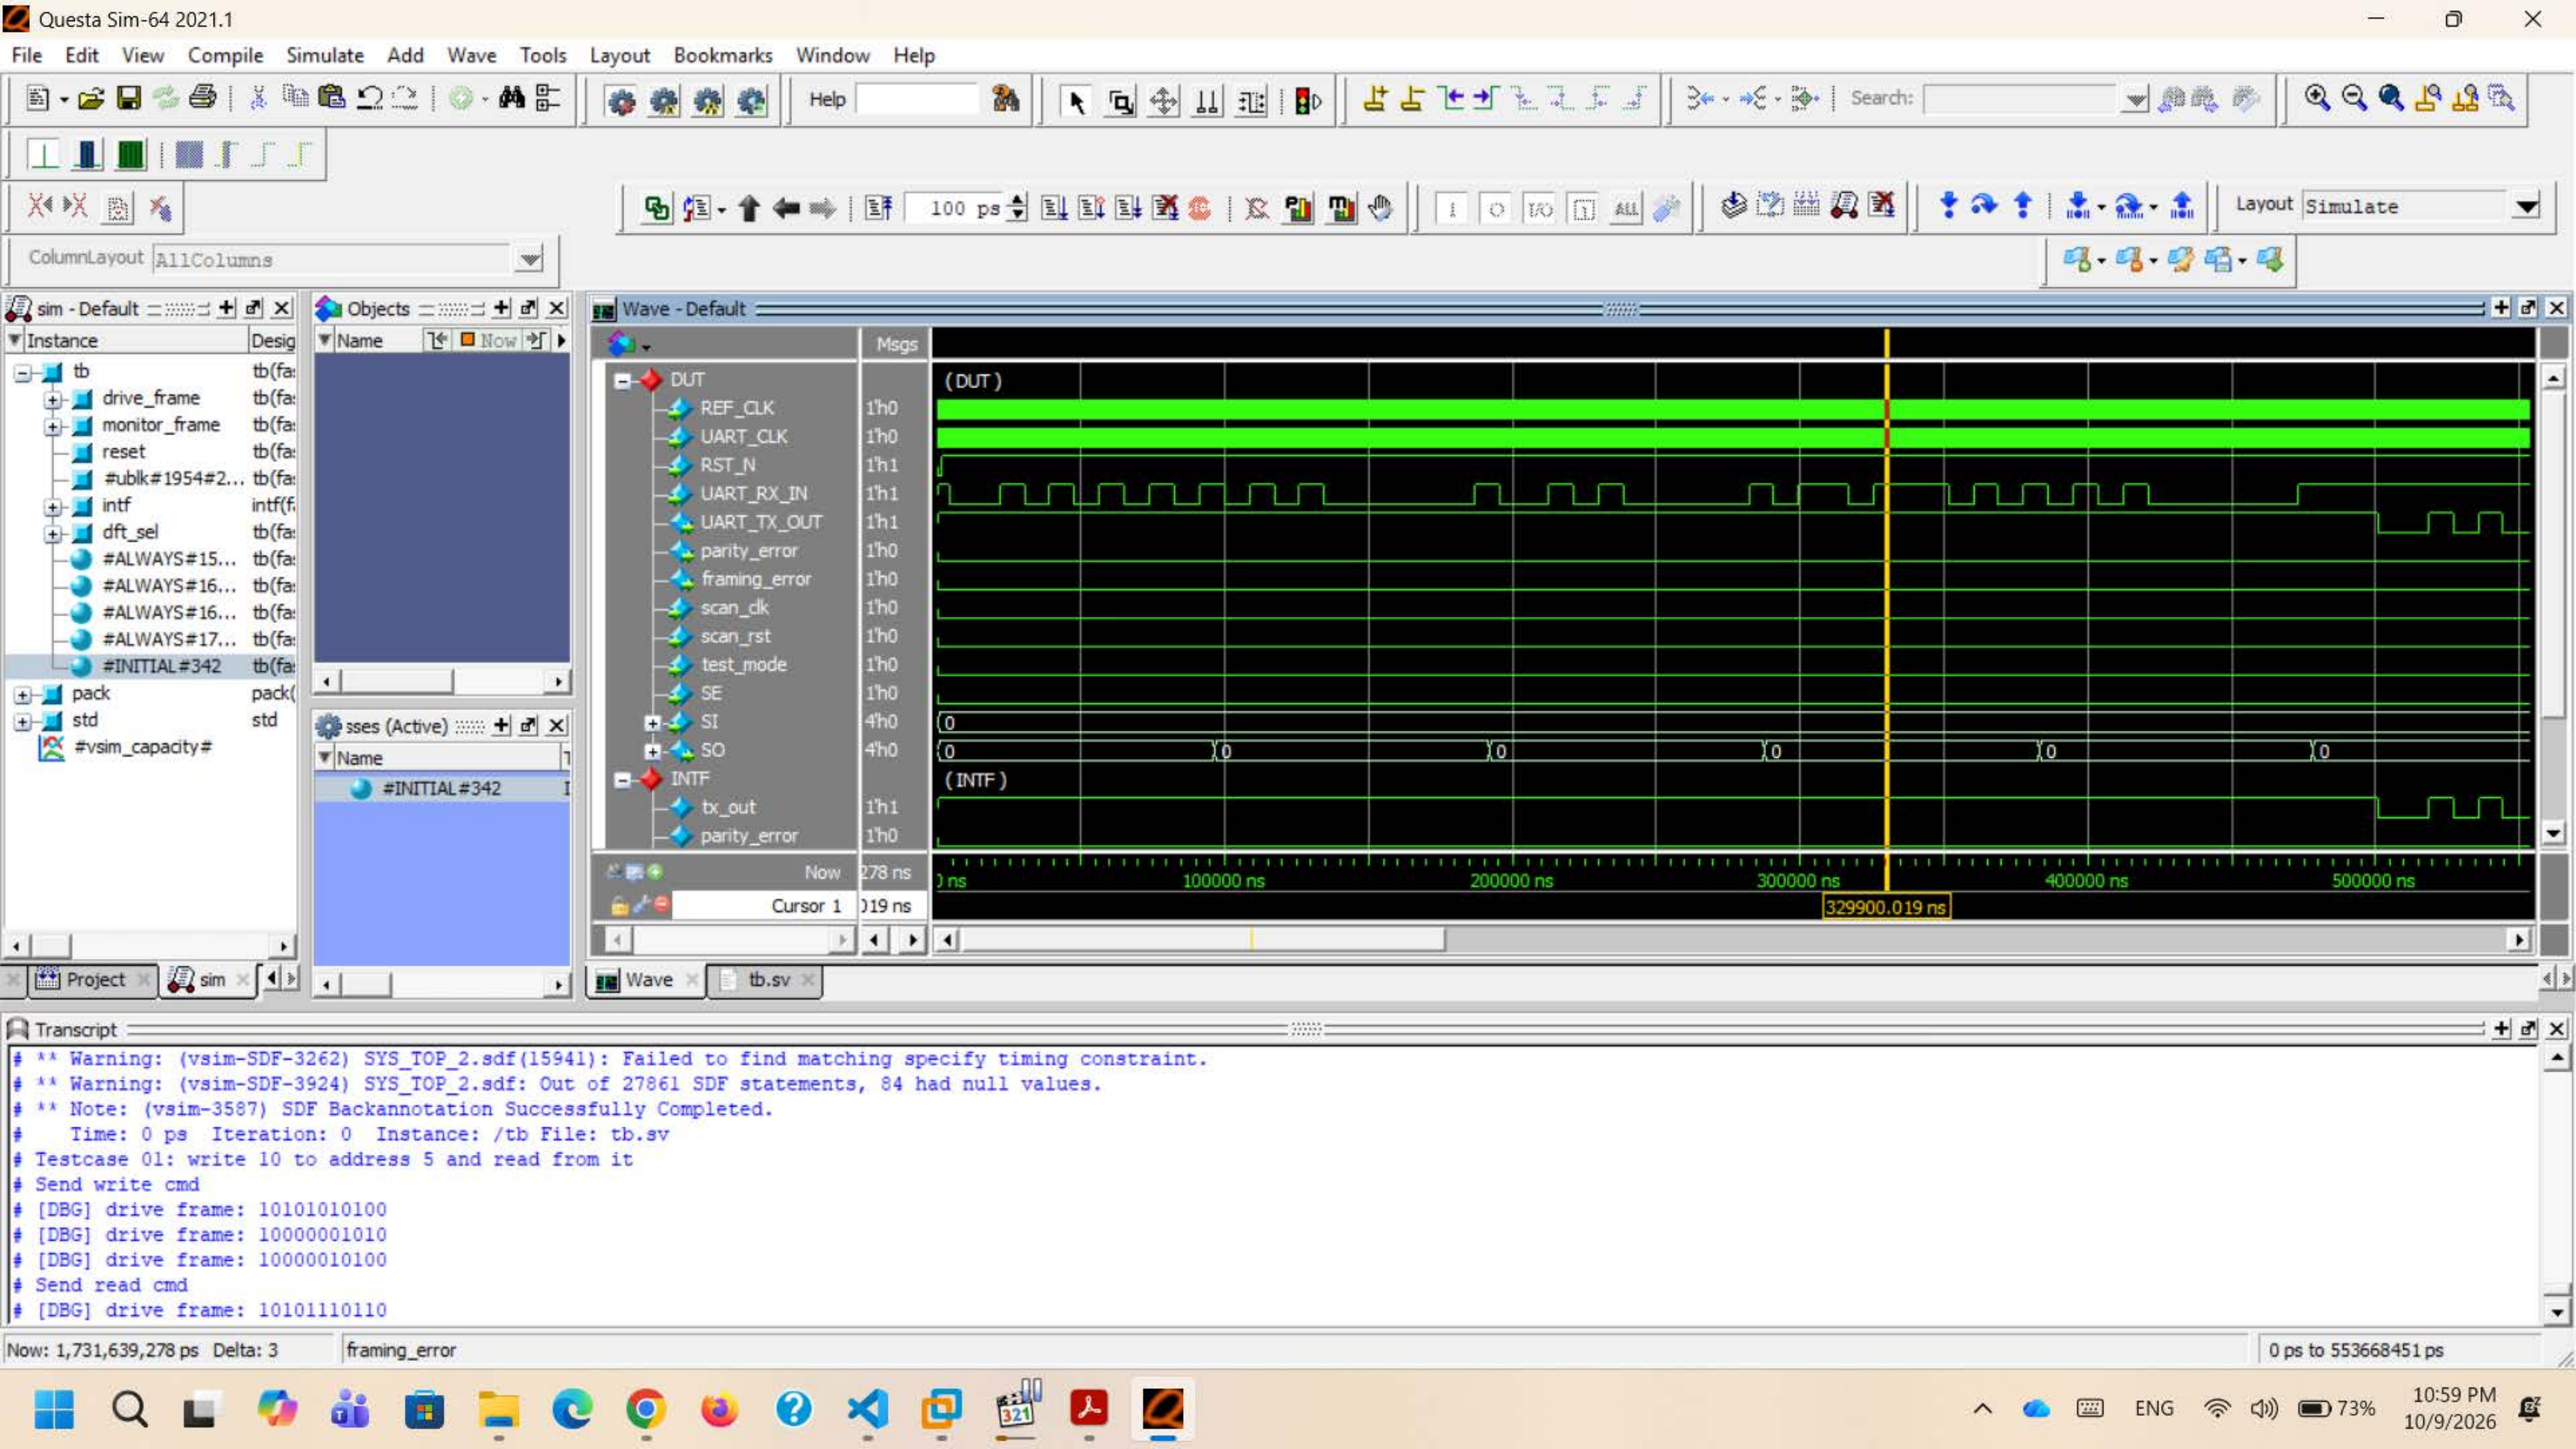
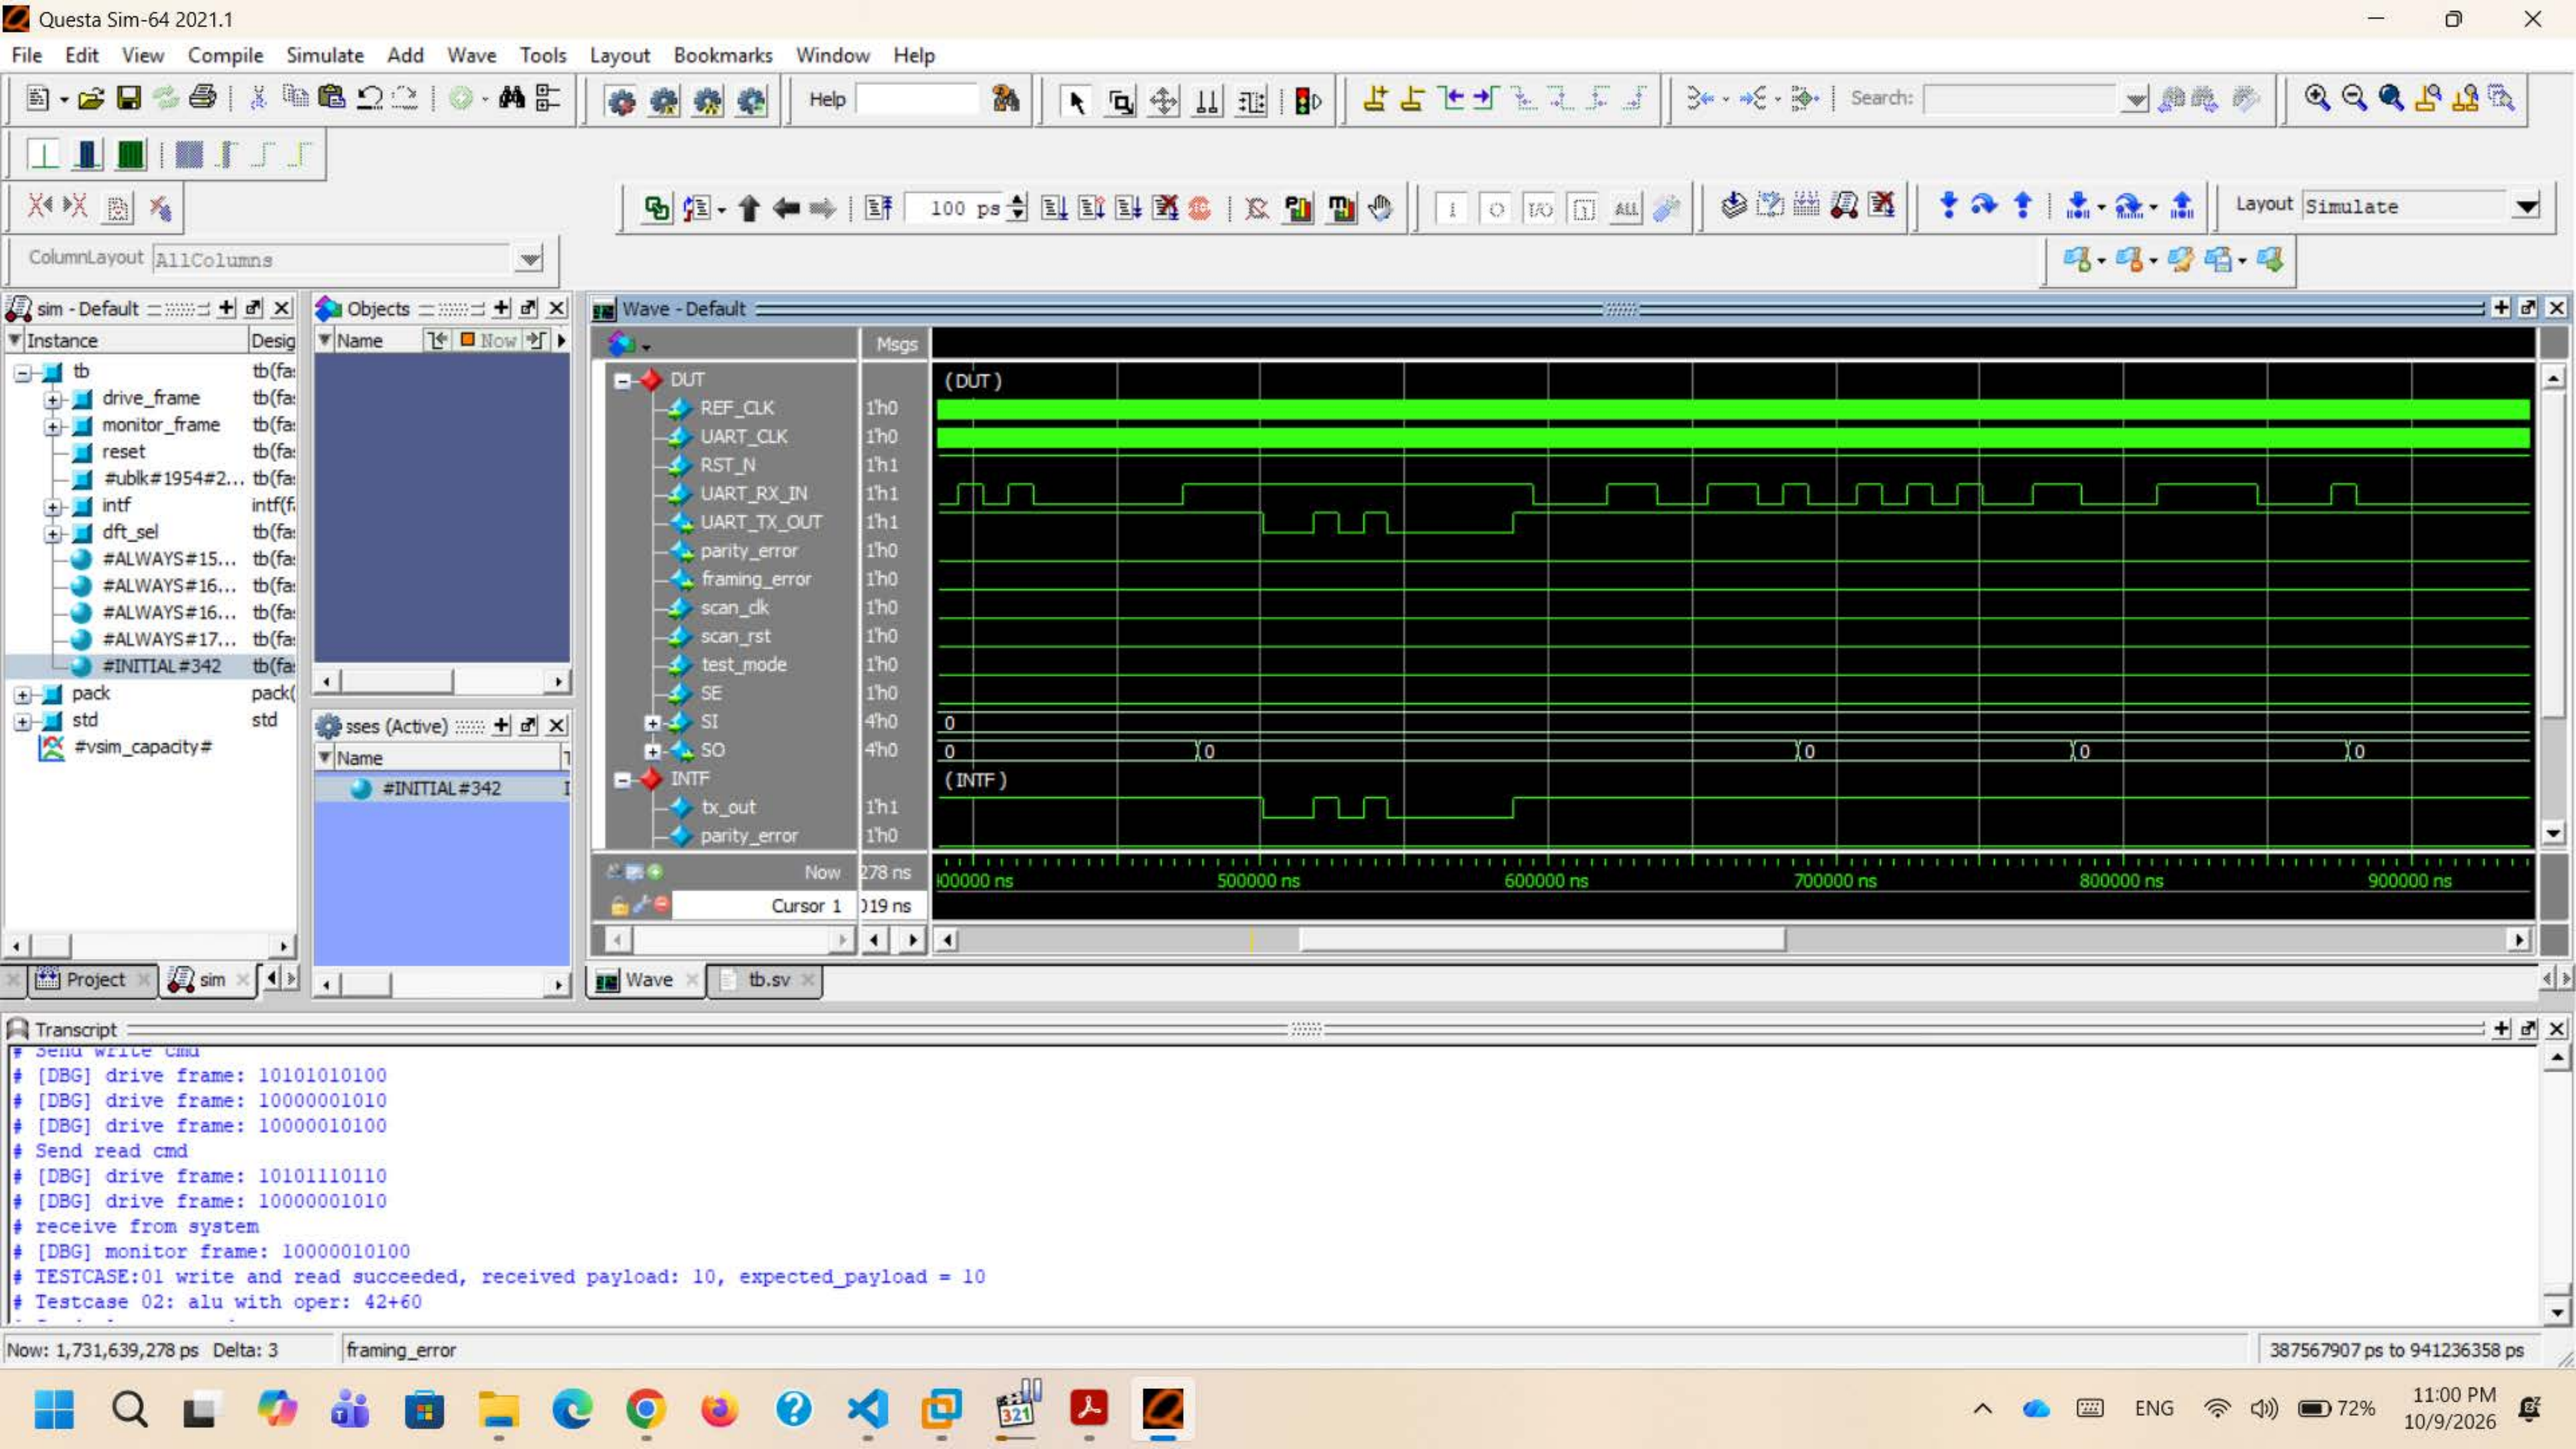
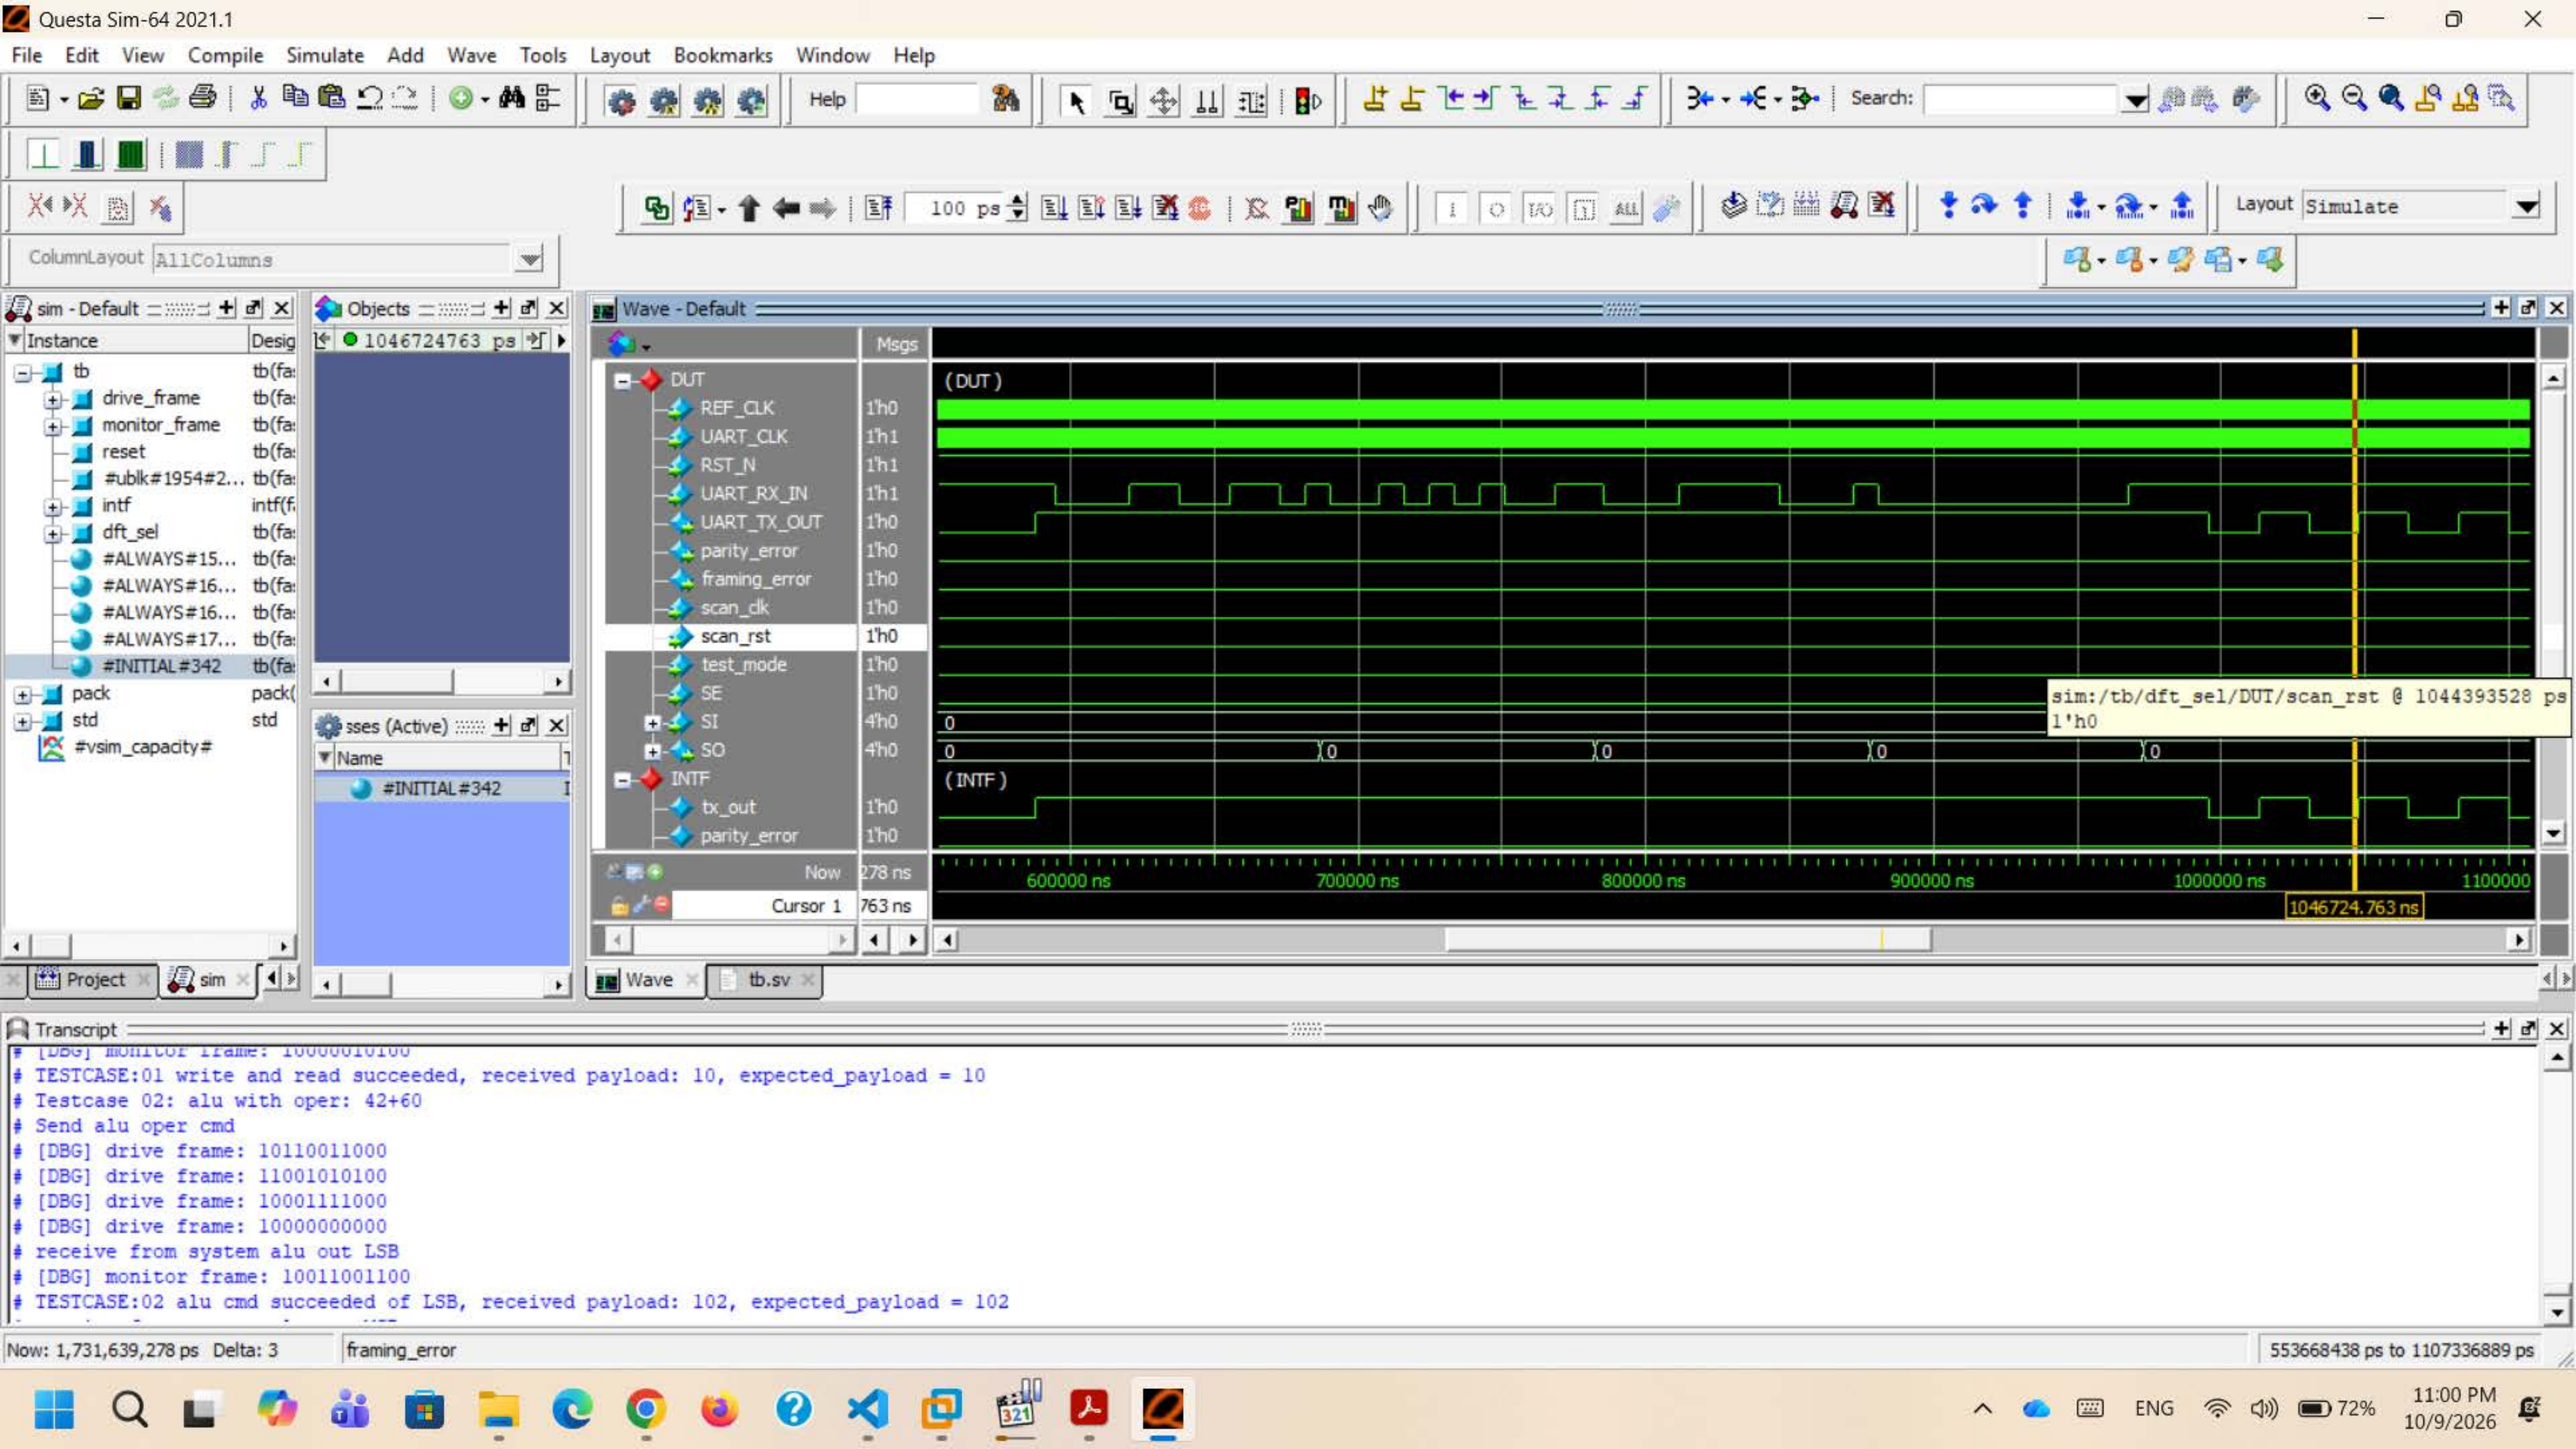
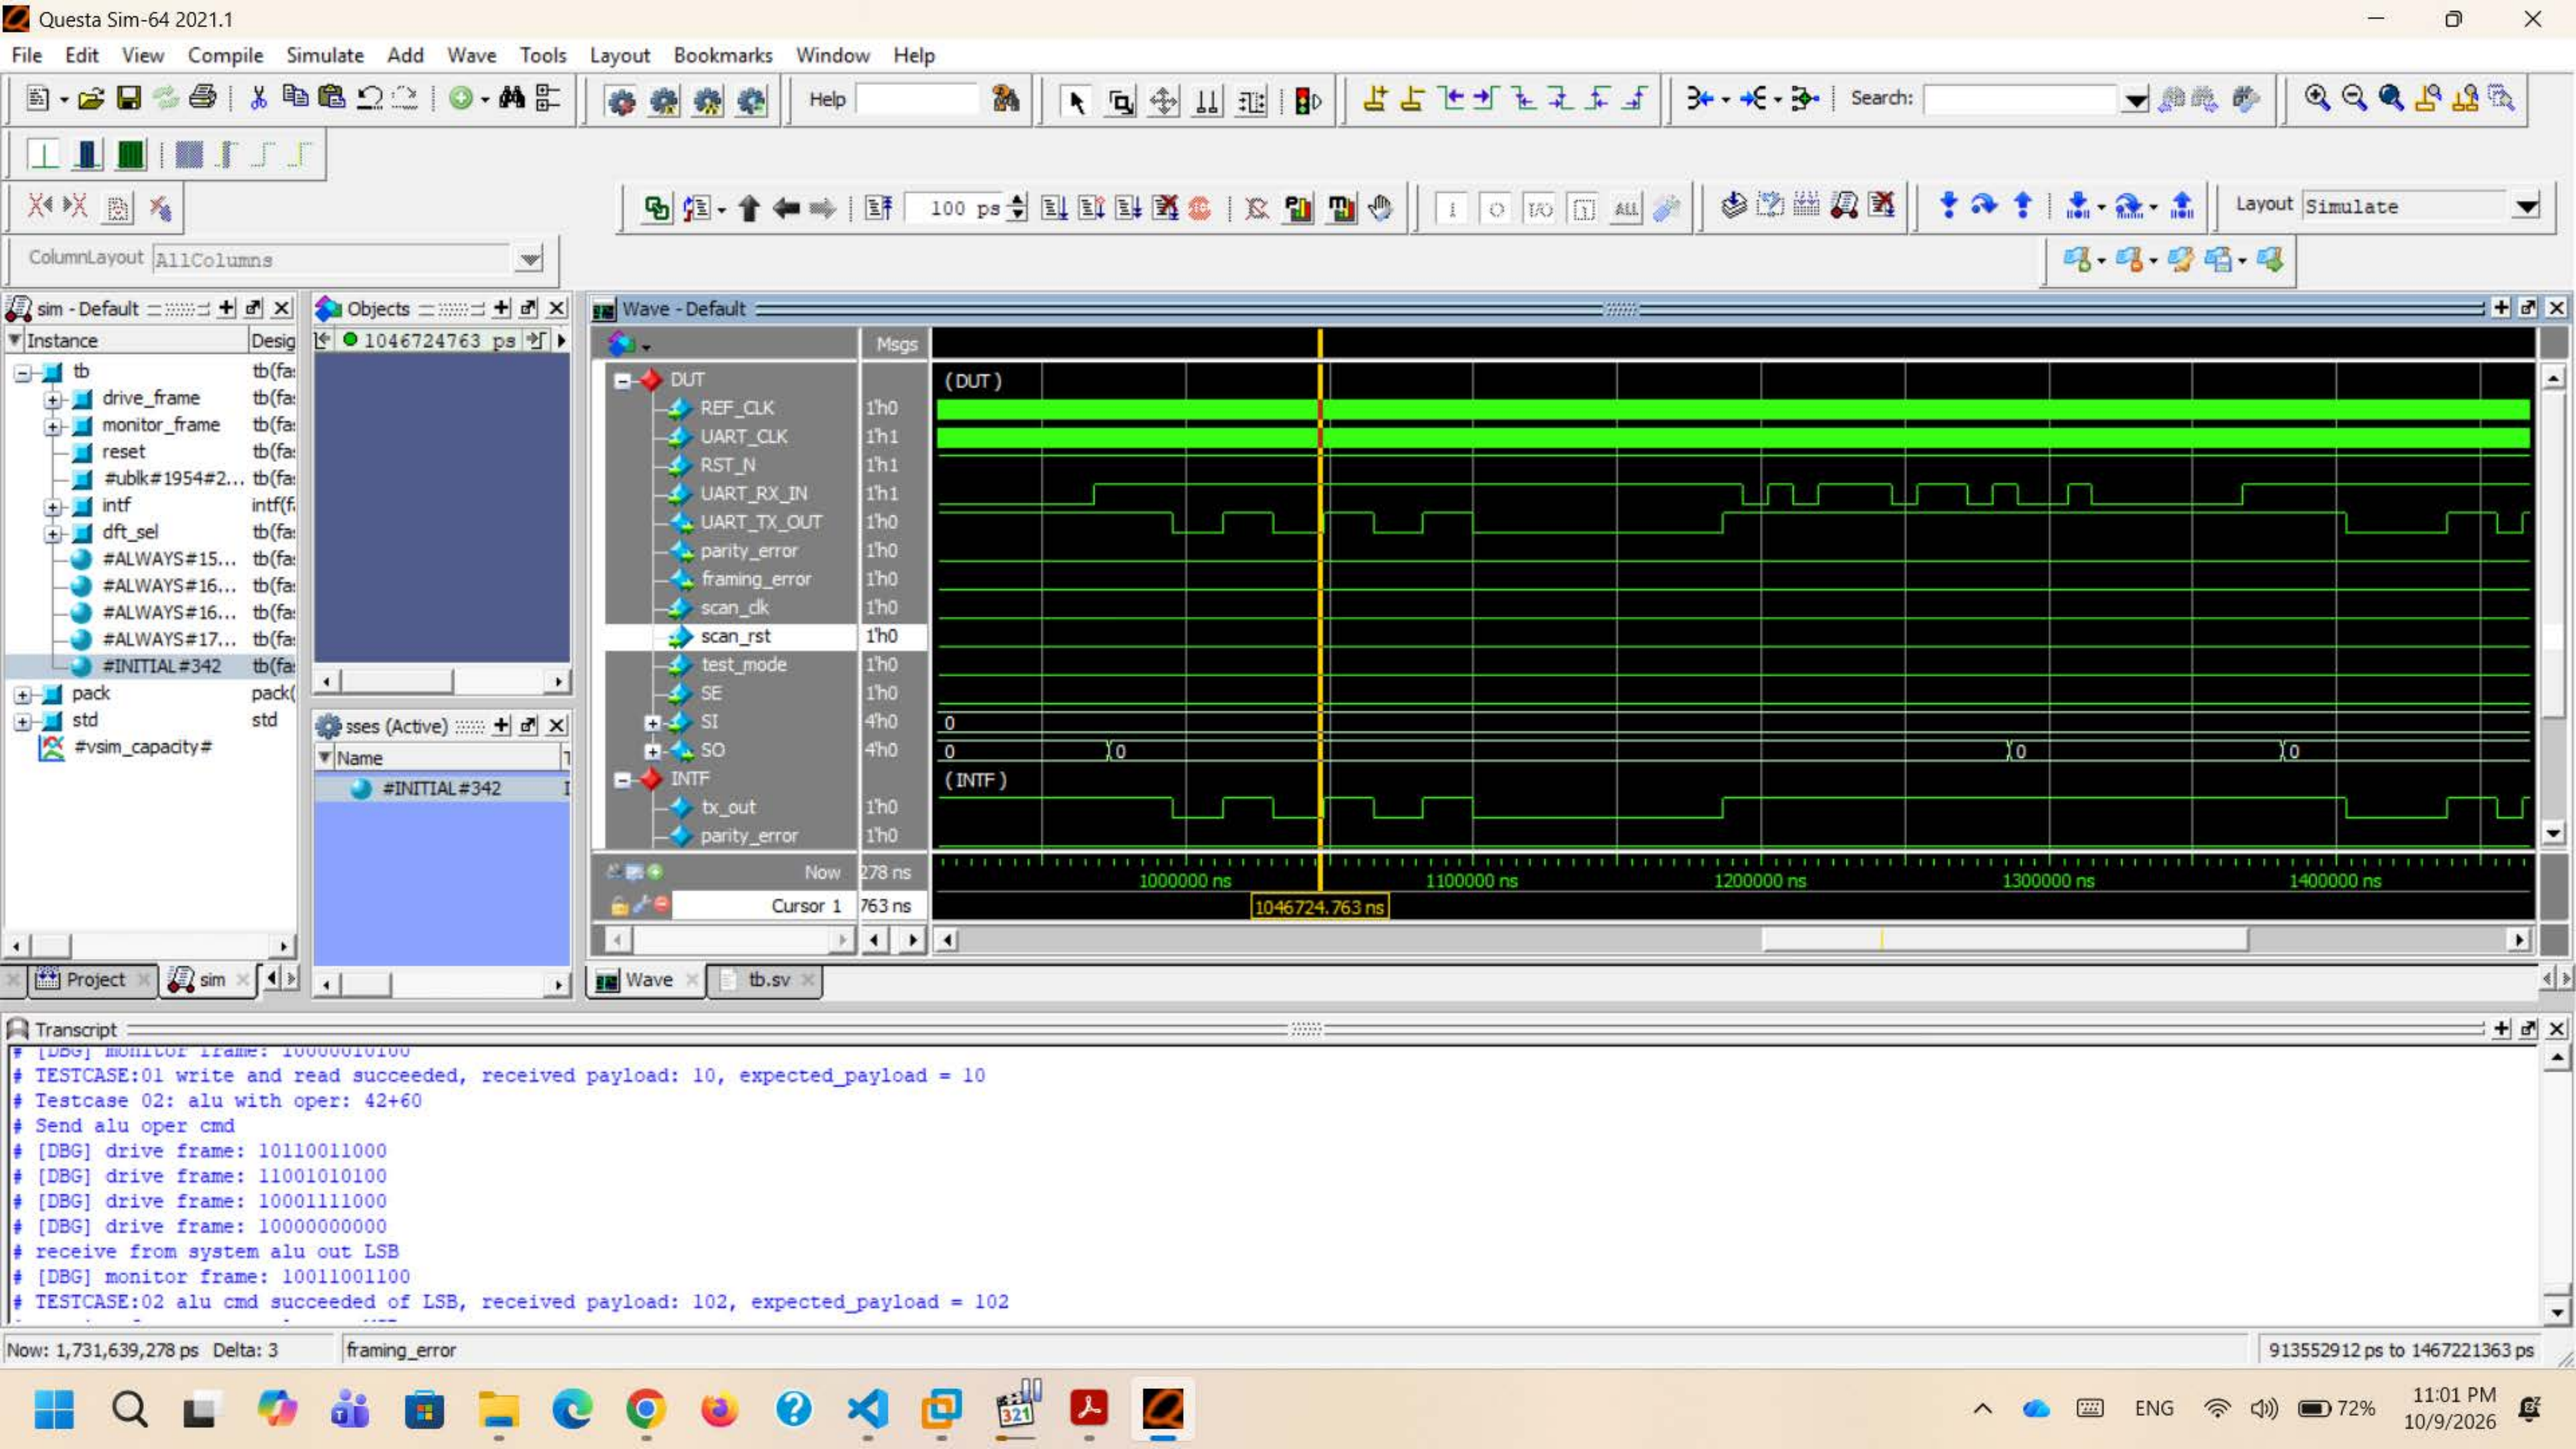
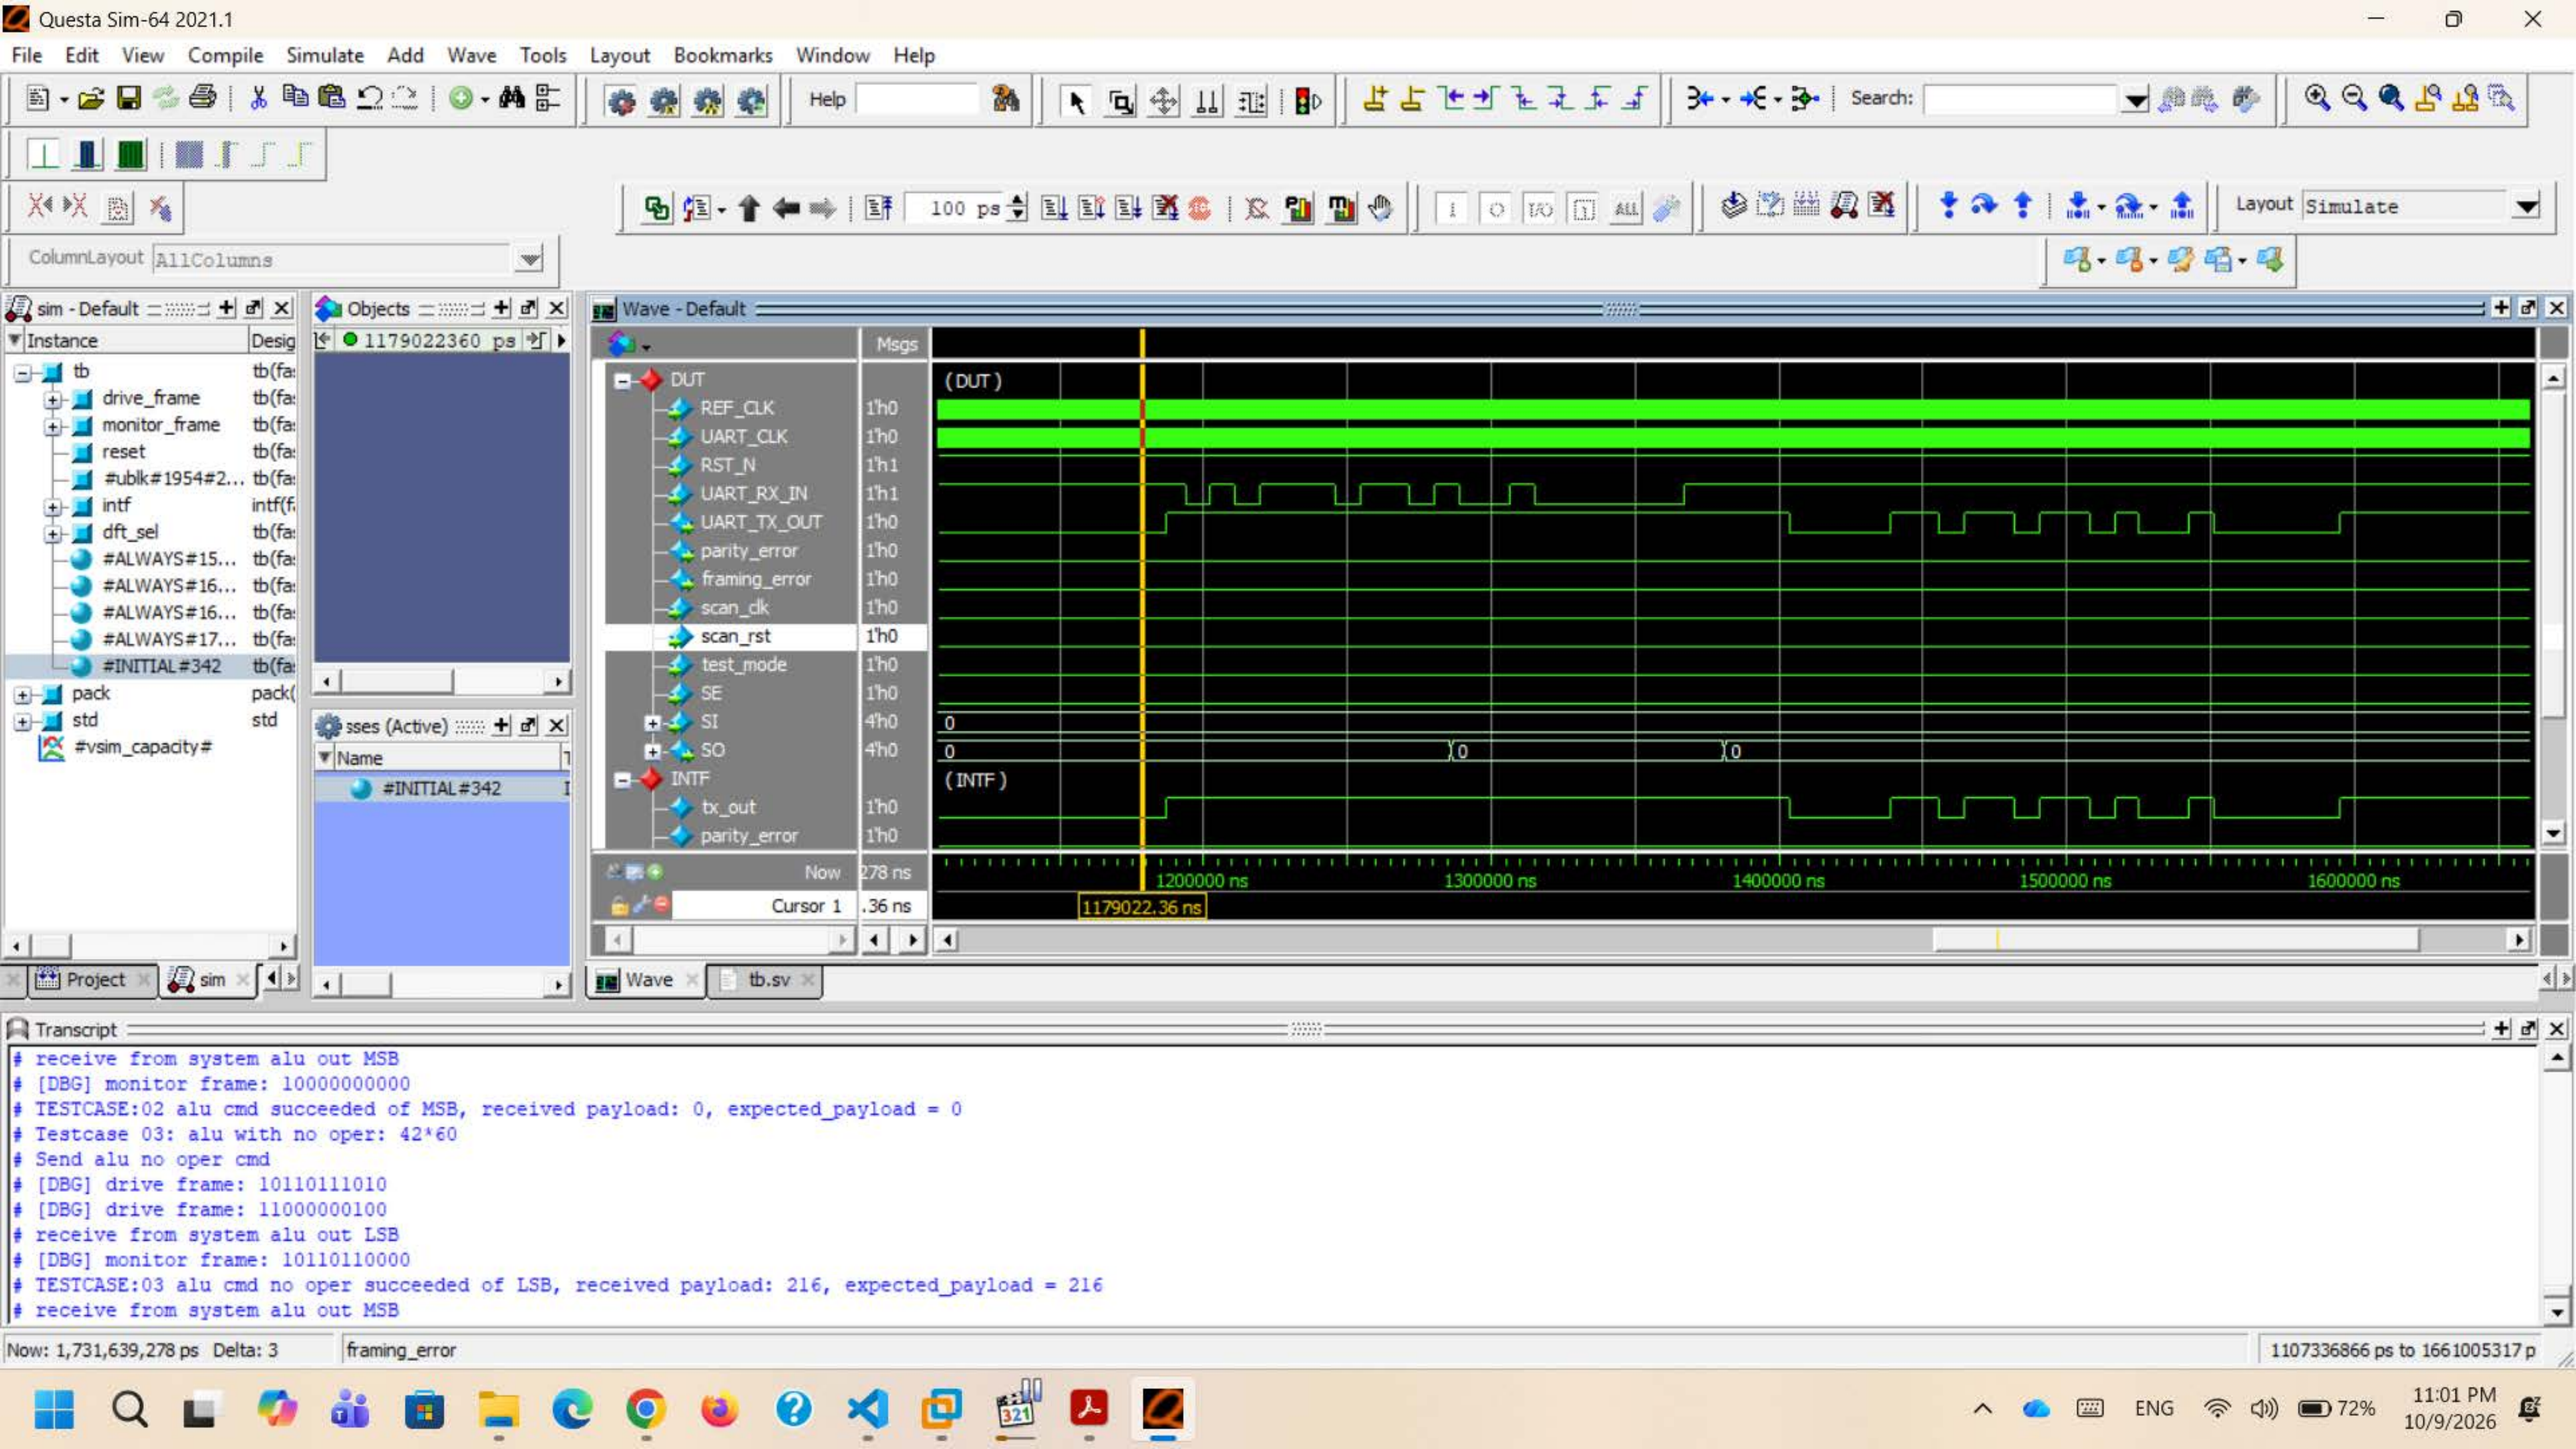

Questa Sim-64 2021.1
File Edit View Compile Simulate Add Wave Tools Layout Bookmarks Window Help
sim - Default
Instance
tb
drive_frame
monitor_frame
reset
intf
dft_sel
#INITIAL#342
pack
std
#vsim_capacity#
Objects
Name
#INITIAL#342
Wave - Default
Msgs
DUT
REF_CLK
UART_CLK
RST_N
UART_RX_IN
UART_TX_OUT
parity_error
framing_error
scan_clk
scan_rst
test_mode
SE
SI
SO
INTF
tx_out
parity_error
(DUT)
(INTF)
Now
Cursor 1
100000 ns
200000 ns
300000 ns
400000 ns
500000 ns
329900.019 ns
Transcript
** Warning: (vsim-SDF-3262) SYS_TOP_2.sdf(15941): Failed to find matching specify timing constraint.
** Warning: (vsim-SDF-3924) SYS_TOP_2.sdf: Out of 27861 SDF statements, 84 had null values.
** Note: (vsim-3587) SDF Backannotation Successfully Completed.
Time: 0 ps Iteration: 0 Instance: /tb File: tb.sv
Testcase 01: write 10 to address 5 and read from it
Send write cmd
[DBG] drive frame: 10101010100
[DBG] drive frame: 10000001010
[DBG] drive frame: 10000010100
Send read cmd
[DBG] drive frame: 10101110110
Now: 1,731,639,278 ps Delta: 3
framing_error
0 ps to 553668451 ps
ENG
73%
10:59 PM
10/9/2026


Questa Sim-64 2021.1
File Edit View Compile Simulate Add Wave Tools Layout Bookmarks Window Help
sim - Default
Instance
tb
drive_frame
monitor_frame
reset
intf
dft_sel
pack
std
#vsim_capacity#
Objects
Name
Now
Wave - Default
Msgs
DUT
REF_CLK
UART_CLK
RST_N
UART_RX_IN
UART_TX_OUT
parity_error
framing_error
scan_clk
scan_rst
test_mode
SE
SI
SO
INTF
tx_out
parity_error
(DUT)
(INTF)
Cursor 1
500000 ns
600000 ns
700000 ns
800000 ns
900000 ns
Transcript
[DBG] drive frame: 10101010100
[DBG] drive frame: 10000001010
[DBG] drive frame: 10000010100
Send read cmd
[DBG] drive frame: 10101110110
[DBG] drive frame: 10000001010
receive from system
[DBG] monitor frame: 10000010100
TESTCASE:01 write and read succeeded, received payload: 10, expected_payload = 10
Testcase 02: alu with oper: 42+60
Now: 1,731,639,278 ps Delta: 3
framing_error
387567907 ps to 941236358 ps
ENG
72%
11:00 PM
10/9/2026


Questa Sim-64 2021.1
File Edit View Compile Simulate Add Wave Tools Layout Bookmarks Window Help
sim - Default
Instance
tb
drive_frame
monitor_frame
reset
intf
dft_sel
pack
std
#vsim_capacity#
Objects
1046724763 ps
Wave - Default
Msgs
DUT
REF_CLK
UART_CLK
RST_N
UART_RX_IN
UART_TX_OUT
parity_error
framing_error
scan_clk
scan_rst
test_mode
SE
SI
SO
INTF
tx_out
parity_error
(DUT)
(INTF)
sim:/tb/dft_sel/DUT/scan_rst @ 1044393528 ps
1'h0
600000 ns
700000 ns
800000 ns
900000 ns
1000000 ns
1100000
1046724.763 ns
Now
278 ns
Cursor 1
763 ns
Transcript
TESTCASE:01 write and read succeeded, received payload: 10, expected_payload = 10
Testcase 02: alu with oper: 42+60
Send alu oper cmd
[DBG] drive frame: 10110011000
[DBG] drive frame: 11001010100
[DBG] drive frame: 10001111000
[DBG] drive frame: 10000000000
receive from system alu out LSB
[DBG] monitor frame: 10011001100
TESTCASE:02 alu cmd succeeded of LSB, received payload: 102, expected_payload = 102
Now: 1,731,639,278 ps Delta: 3
framing_error
553668438 ps to 1107336889 ps
ENG
72%
11:00 PM
10/9/2026


Questa Sim-64 2021.1
File Edit View Compile Simulate Add Wave Tools Layout Bookmarks Window Help
sim - Default
Instance
tb
drive_frame
monitor_frame
reset
intf
dft_sel
pack
std
#vsim_capacity#
Objects
1046724763 ps
Wave - Default
Msgs
DUT
REF_CLK
UART_CLK
RST_N
UART_RX_IN
UART_TX_OUT
parity_error
framing_error
scan_clk
scan_rst
test_mode
SE
SI
SO
INTF
tx_out
parity_error
(DUT)
(INTF)
Now
278 ns
Cursor 1
763 ns
1000000 ns
1100000 ns
1200000 ns
1300000 ns
1400000 ns
1046724.763 ns
Transcript
TESTCASE:01 write and read succeeded, received payload: 10, expected_payload = 10
Testcase 02: alu with oper: 42+60
Send alu oper cmd
[DBG] drive frame: 10110011000
[DBG] drive frame: 11001010100
[DBG] drive frame: 10001111000
[DBG] drive frame: 10000000000
receive from system alu out LSB
[DBG] monitor frame: 10011001100
TESTCASE:02 alu cmd succeeded of LSB, received payload: 102, expected_payload = 102
Now: 1,731,639,278 ps Delta: 3
framing_error
913552912 ps to 1467221363 ps
ENG
72%
11:01 PM
10/9/2026


Questa Sim-64 2021.1
File Edit View Compile Simulate Add Wave Tools Layout Bookmarks Window Help
sim - Default
Instance
tb
drive_frame
monitor_frame
reset
intf
dft_sel
pack
std
#vsim_capacity#
Objects
1179022360 ps
Wave - Default
Msgs
DUT
REF_CLK
UART_CLK
RST_N
UART_RX_IN
UART_TX_OUT
parity_error
framing_error
scan_clk
scan_rst
test_mode
SE
SI
SO
INTF
tx_out
parity_error
(DUT)
(INTF)
Now
Cursor 1
1179022.36 ns
1200000 ns
1300000 ns
1400000 ns
1500000 ns
1600000 ns
Transcript
receive from system alu out MSB
[DBG] monitor frame: 10000000000
TESTCASE:02 alu cmd succeeded of MSB, received payload: 0, expected_payload = 0
Testcase 03: alu with no oper: 42*60
Send alu no oper cmd
[DBG] drive frame: 10110111010
[DBG] drive frame: 11000000100
receive from system alu out LSB
[DBG] monitor frame: 10110110000
TESTCASE:03 alu cmd no oper succeeded of LSB, received payload: 216, expected_payload = 216
receive from system alu out MSB
Now: 1,731,639,278 ps Delta: 3
framing_error
1107336866 ps to 1661005317 p
ENG
72%
11:01 PM
10/9/2026