Measurement Convention, means a ship which is designed for the carriage of containers and which is constructed like an open “U”, with not less than 66.7% of the total cargo hatchway clear opening area in an “open-top” configuration, with a double bottom and above this, high-sided erections without hatch covers on the upper deck and without a complete deck above the

---CHUNK---

SOURCE: MSC.234%2882%29.pdf
opening area in an “open-top” configuration, with a double bottom and above this, high-sided erections without hatch covers on the upper deck and without a complete deck above the moulded draught (refer to the figur e), and needs to be regarded as a ship of a novel type as referred to in regulation 1(3) of the Convention.

Interpretations of the provisions of the 1969 Tonnage Measurement Convention

3 The provisions of the 1969 Tonnage Measurem ent Convention for treatment of enclosed spaces should be applied to open-top cont ainerships subject to the following unified interpretations:

.1 Upper deck (regulation 2(1))

In a ship which is exempted by the Admi nistration from the requirements to fit weathertight hatch covers .on the uppermost deck exposed to weather and sea, as in an open-top containership, the upper d eck should be taken as that deck which would have been determined by regulation 2(1) as if such hatch covers had been fitted.

---CHUNK---

SOURCE: MSC.234%2882%29.pdf
in an open-top containership, the upper d eck should be taken as that deck which would have been determined by regulation 2(1) as if such hatch covers had been fitted.

.2 Enclosed spaces (regulation 2(4))

In open-top containerships, an opening in a deck such as the absence of hatch covers should not preclude a space from being included in the enclosed space.

.3 Shelter above container stacks

In the case of open-top containerships having movable non-load-bearing covers (shelter) of light construction resting on the container-guides, the space above the hatch coamings up to the covers does not qualify as an excluded space according to regulation 2(5). For this particular design, howe ver, an exception can be made in accordance with regulation l(3). The sp ace can be excluded provided that this type of ship meets the requirements of an open-top containership without such covers.

RESOLUTION MSC.234(82)
RECOMMENDATIONS CONCERNING TONNAGE MEASUREMENT OF

---CHUNK---

SOURCE: MSC.234%2882%29.pdf
type of ship meets the requirements of an open-top containership without such covers.

RESOLUTION MSC.234(82)
RECOMMENDATIONS CONCERNING TONNAGE MEASUREMENT OF OPEN-TOP CONTAINERSHIPSMSC 82/24/Add.2
ANNEX 28
Page 4

I:\MSC\82\24-Add-2.doc
Reduced gross tonnage of open-top containerships

4 To reduce the disadvantages caused by the use of a greater gross tonnage in comparison with a gross tonnage of conventional containers hips for assessing fees, a reduced gross tonnage for open-top containerships, without limitation in size, based on a simplified formula is recommended as follows:

GTR = 0.9 x GT

where:

GTR = the reduced gross tonnage

GT = the gross tonnage calculated in accordance with the 1969 Tonnage Measurement Convention

Entry into the International Tonnage Certificate (1969)

5 In the International Tonnage Certificate (1969), under “Remarks”, an entry should be made for the tonnage of the open-top containership as follows:

---CHUNK---

SOURCE: MSC.234%2882%29.pdf
5 In the International Tonnage Certificate (1969), under “Remarks”, an entry should be made for the tonnage of the open-top containership as follows:

“In accordance with resolution MSC.234(82), th e reduced gross tonnage which should be used for the calculation of tonnage-based fees is

”

Figure referred to in paragraph 2

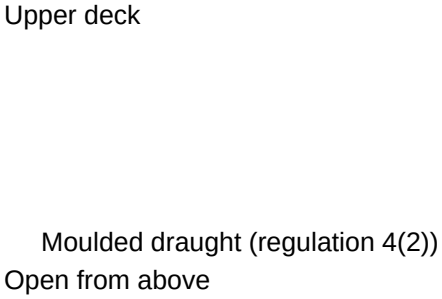

***
CC
RESOLUTION MSC.234(82)
RECOMMENDATIONS CONCERNING TONNAGE MEASUREMENT OF
OPEN-TOP CONTAINERSHIPSRESOLUTION MSC.234(82)
RECOMMENDATIONS CONCERNING TONNAGE MEASUREMENT OF
OPEN-TOP CONTAINERSHIPS

---CHUNK---

SOURCE: MEPC.336%2876%29.pdf
RESOLUTION MEPC.336(76) (adopted on 17 June 2021)
2021 GUIDELINES ON OPERATIONAL CARBON INTENSITY INDICATORS AND THE CALCULATION METHODS (CII GUIDELINES, G1)MEPC 76/15/Add.2
Annex 10, page 1
I:\MEPC\76\MEPC 76-15-Add.2.docx
ANNEX 10
RESOLUTION MEPC.336(76)
(adopted on 17 June 2021)

2021 GUIDELINES ON OPERATIONAL CARBON INTENSITY INDICATORS AND THE CALCULATION METHODS (CII GUIDELINES, G1)
THE MARINE ENVIRONMENT PROTECTION COMMITTEE,
RECALLING Article 38(a) of the Convention on the International Maritime Organization concerning the functions of the Marine Environment Protection Committee conferred upon it by international conventions for the prevention and control of marine pollution from ships,
NOTING that it adopted, by resolution MEPC.328(76), the 2021 revised MARPOL Annex VI , which is expected to enter into force on 1 November 2022 upon its deemed acceptance on 1 May 2022,
NOTING IN PARTICULAR that the 2021 revised MARPOL Annex VI contains amendments

---CHUNK---

SOURCE: MEPC.336%2876%29.pdf
which is expected to enter into force on 1 November 2022 upon its deemed acceptance on 1 May 2022,
NOTING IN PARTICULAR that the 2021 revised MARPOL Annex VI contains amendments concerning mandatory goal -based technical and operational measures to reduce carbon intensity of international shipping,
NOTING FURTHER that regulation 28.1 of MARPOL Annex VI requires ships to which this regulation apply to calculate the attained annual operational CII taking into account the guidelines developed by the Organization,
RECOGNIZING that the aforementioned amendments to MARPOL Annex VI require relevant guidelines for uniform and effective implementation of the regulations and to provide sufficient