RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 1

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
ANNEX 17

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)

2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALS

THE MARINE ENVIRONMENT PROTECTION COMMITTEE,

RECALLING Article 38(a) of the Convention on the International Maritime Organization concerning the functions of the Marine Environment Protection Committee conferred upon it by international conventions for the prevention and control of marine pollution from ships,

RECALLING ALSO that the International Conference on the Safe and Environmentally Sound Recycling of Ships held in May 2009 adopted the Hong Kong International Convention for the Safe and Environmentally Sound Recycling of Ships, 2009 (the Hong Kong Convention) together with six Conference resolutions,

NOTING that regulations 5.1 and 5.2 of the annex to the Hong Kong Convention require that ships shall have on board an Inventory of Hazardous Materials which shall be prepared and

Kong Convention) together with six Conference resolutions,

NOTING that regulations 5.1 and 5.2 of the annex to the Hong Kong Convention require that ships shall have on board an Inventory of Hazardous Materials which shall be prepared and verified taking into account guidelines, including any threshold values and exemptions contained in those guidelines, developed by the Organization,

NOTING ALSO resolution MEPC.197(62) by which it adopted Guidelines for the development of the Inventory of Hazardous Materials (the guidelines) and resolved to keep them under review,

RECOGNIZING the need to improve the guidance on threshold values and exemptions, as contained in the aforementioned guidelines,

HAVING CONSIDERED, at its sixty-eighth session, the recommendation made by the Sub-Committee on Pollution Prevention and Response, at its second session,

1 ADOPTS the 2015 Guidelines for the development of the Inventory of Hazardous Materials as set out in the annex to this resolution;

2 INVITES Member Governments to apply the 2015 Guidelines as soon as possible, or latest when the Convention enters into force;

Materials as set out in the annex to this resolution;

2 INVITES Member Governments to apply the 2015 Guidelines as soon as possible, or latest when the Convention enters into force;

3 AGREES to keep the 2015 Guidelines under review in the light of experience gained with their application;

4 SUPERSEDES the guidelines adopted by resolution MEPC.197(62).
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 2

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
ANNEX

2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALS

1 INTRODUCTION

1.1 Objectives

These guidelines provide recommendations for developing the Inventory of Hazardous Materials (hereinafter referred to as "the Inventory" or "the IHM") to assist compliance with regulation 5 (Inventory of Hazardous Materials) of the Hong Kong International Convention for the Safe and Environmentally Sound Recycling of Ships, 2009 (hereinafter referred to as "the Convention").

1.2 Application

regulation 5 (Inventory of Hazardous Materials) of the Hong Kong International Convention for the Safe and Environmentally Sound Recycling of Ships, 2009 (hereinafter referred to as "the Convention").

1.2 Application

These guidelines have been developed to provide relevant stakeholders (e.g. shipbuilders , equipment suppliers, repairers, shipowners and ship management companies) with the essential requirements for the practical and logical development of the Inventory.

1.3 Objectives

The objectives of the Inventory are to provide ship-specific information on the actual hazardous materials present on board, in order to protect health and safety and to prevent environmental pollution at s hip recycling facilities. This information will be used by the s hip recycling facilities in order to decide how to manage the types and amounts of materials identified in the Inventory of Hazardous Materials (regulation 9 of the Convention).

2 DEFINITIONS

The terms used in these guidelines have the same meaning as those defined in the Convention, with the following additional definitions which apply to these guidelines only.

2 DEFINITIONS

The terms used in these guidelines have the same meaning as those defined in the Convention, with the following additional definitions which apply to these guidelines only.

2.1 Exemption (as referred to in regulation 5 of the Convention) means materials specified in paragraph 3.3 in these guidelines that do not need to be listed on the IHM, even if such materials or items exceed the IHM threshold values.

2.2 Fixed means the conditions that equipment or materials are securely fitted with the ship, such as by welding or with bolts, riveted or cemented, and used at their position, including electrical cables and gaskets.

2.3 Homogeneous material means a material of uniform composition throughout that cannot be mechanically disjointed into different materials, meaning that the materials cannot, in principle, be separated by mechanical actions such as unscrewing, cutting, crushing, grinding and abrasive processes.

2.4 Loosely fitted equipment means equipment or materials present on board the ship by the conditions other than "fixed", such as fire extinguishers, distress flares, and lifebuoys.

grinding and abrasive processes.

2.4 Loosely fitted equipment means equipment or materials present on board the ship by the conditions other than "fixed", such as fire extinguishers, distress flares, and lifebuoys.

2.5 Product means machinery, equipment, materials and applied coatings on board a ship.

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 3

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
2.6 Supplier means a company which provides products; which may be a manufacturer, trader or agency.

2.7 Supply chain means the series of entities involved in the supply and purchase of materials and goods, from raw materials to final product.

2.8 Threshold value is defined as the concentration value in homogeneous materials.

3 REQUIREMENTS FOR THE INVENTORY

3.1 Scope of the Inventory

The Inventory consists of:

Part I: Materials contained in ship structure or equipment;

Part II: Operationally generated wastes; and

Part III: Stores.

3.2 Materials to be listed in the Inventory

3.1 Scope of the Inventory

The Inventory consists of:

Part I: Materials contained in ship structure or equipment;

Part II: Operationally generated wastes; and

Part III: Stores.

3.2 Materials to be listed in the Inventory

3.2.1 Appendix 1 of these guidelines (Items to be listed in the Inventory of Hazardous Materials), provides information on the hazardous materials that may be found on board a ship. Materials set out in appendix 1 should be listed in the Inventory. Each item in appendix 1 of these guidelines is classified under tables A, B, C or D, according to its properties:

.1 table A comprises the materials listed in appendix 1 of the Convention;

.2 table B comprises the materials listed in appendix 2 of the Convention;

.3 table C (Potentially hazardous items) comprises items which are potentially hazardous to the environment and human health at ship recycling facilities; and

.4 table D (Regular consumable goods potentially containing hazardous materials) comprises goods which are not integral to a ship and are unlikely to be dismantled or treated at a ship recycling facility.

and

.4 table D (Regular consumable goods potentially containing hazardous materials) comprises goods which are not integral to a ship and are unlikely to be dismantled or treated at a ship recycling facility.

3.2.2 Tables A and B correspond to part I of the Inventory. Table C corresponds to parts II and III and table D corresponds to part III.

3.2.3 For loosely fitted equipment, there is no need to list this in part I of the Inventory. Such equipment which remains on board when the ship is recycled should be listed in part III.

3.2.4 Those batteries containing lead acid or other hazardous materials that are fixed in place should be listed in part I of the Inventory. Batteries that are loosely fitted, which includes consumer batteries and batteries in stores, should be listed in part III of the Inventory.

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 4

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
3.2.5 Similar materials or items that contain hazardous materials that potentially exceed

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

3.2.5 Similar materials or items that contain hazardous materials that potentially exceed the threshold value can be listed together (not individually) on the IHM with their general location and approximate amount specified there (hereinafter referred to as "bulk listing"). An example of how to list those materials and items is shown in row 3 of table 1 of appendix 3.

3.3 Exemptions Materials not required to be listed in the Inventory

3.3.1 Materials listed in Table B that are inherent in solid metals or metal alloys, such as steels, aluminium, brasses, bronzes, plating and solders, provided they are used in general construction, such as hull, superstructure, pipes or housings for equipment and machinery, are not required to be listed in the Inventory.

3.3.2 Although electrical and electronic equipment is required to be listed in the Inventory, the amount of hazardous materials potentially contained in printed wiring boards (printed

are not required to be listed in the Inventory.

3.3.2 Although electrical and electronic equipment is required to be listed in the Inventory, the amount of hazardous materials potentially contained in printed wiring boards (printed circuit boards) installed in the equipment does not need to be reported in the Inventory.

3.4 Standard format of the Inventory of Hazardous Materials

The Inventory should be developed on the basis of the standard format set out in appendix 2 of these guidelines: Standard format of the Inventory of Hazardous Materials. Examples of how to complete the Inventory are provided for guidance purposes only.

3.5 Revision to threshold values

Revised threshold values in tables A and B of appendix 1 should be used for IHMs developed or updated after the adoption of the revised values and need not be applied to existing IHMs and IHMs under development. However, when materials are added to the IHM, such as during maintenance, the revised threshold values should be applied and recorded in the IHM.

4 REQUIREMENTS FOR DEVELOPMENT OF THE INVENTORY

4.1 Development of part I of the Inventory for new ships 1

such as during maintenance, the revised threshold values should be applied and recorded in the IHM.

4 REQUIREMENTS FOR DEVELOPMENT OF THE INVENTORY

4.1 Development of part I of the Inventory for new ships 1

4.1.1 Part I of the Inventory for new ships should be developed at the design and construction stage.

4.1.2 Checking of materials listed in table A

During the development of the Inventory (part I), the presence of materials listed in table A of appendix 1 should be checked and confirmed; the quantity and location of table A materials should be list ed in part I of the Inventory. If such materials are used in compliance with the Convention, they should be listed in part I of the Inventory . Any spare parts containing materials listed in table A are required to be listed in part III of the Inventory.

1 In ascertaining whether a ship is a "new ship" or an "existing ship" according to the Convention, the term "a similar stage of construction" in regulation 1.4.2 of the annex to the Convention means the stage at which:

.1 construction identifiable with a specific ship begins: and

"a similar stage of construction" in regulation 1.4.2 of the annex to the Convention means the stage at which:

.1 construction identifiable with a specific ship begins: and
.2 assembly of that ship has commenced comprising at least 50 tonnes or 1% of the estimated mass of all structural material, whichever is less.

4.1.3 Checking of materials listed in table B

If materials listed in table B of appendix 1 are present in products above the threshold values provided in table B, the quantity and location of the products and the contents of the materials present in them should be listed in part I of the Inventory. Any spare parts containing materials listed in table B are required to be listed in part III of the Inventory.

4.1.4 Process for checking of materials

The checking of materials as provided in paragraphs 4.1.2 and 4.1.3 above should be based

containing materials listed in table B are required to be listed in part III of the Inventory.

4.1.4 Process for checking of materials

The checking of materials as provided in paragraphs 4.1.2 and 4.1.3 above should be based on the Material Declaration furnished by the suppliers in the shipbuilding supply chain (e.g. equipment suppliers, parts suppliers, material suppliers).

4.2 Development of part I of the Inventory for existing ships

4.2.1 In order to achieve comparable results for existing ships with respect to part I of the Inventory, the following procedure should be followed:

.1 collection of necessary information;

.2 assessment of collected information;

.3 preparation of visual/sampling check plan;

.4 onboard visual check and sampling check; and

.5 preparation of part I of the Inventory and related documentation.

4.2.2 The determination of hazardous materials present on board existing ships should, as far as practicable, be conducted as prescribed for new ships, including the procedures described in sections 6 and 7 of these guidelines. Alternatively, the procedures described in

as far as practicable, be conducted as prescribed for new ships, including the procedures described in sections 6 and 7 of these guidelines. Alternatively, the procedures described in this section may be applied for existing ships, but these procedures should not be used for any new installation resulting from the conversion or repair of existing ships after the initial preparation of the Inventory.

4.2.3 The procedures described in this section should be carried out by the shipowner, who may draw upon expert assistance. Such an expert or expert party should not be the same as the person or organization authorized by the Administration to approve the Inventory).

4.2.4 Reference is made to appendix 4 (Flow diagram for developing part I of the Inventory for existing ships) and appendix 5 (Example of development process for part I of the Inventory for existing ships.

4.2.5 Collection of necessary information (step 1)

The shipowner should identify, research, request and procure all reasonably available documentation regarding the ship. Information that will be useful includes maintenance,

4.2.5 Collection of necessary information (step 1)

The shipowner should identify, research, request and procure all reasonably available documentation regarding the ship. Information that will be useful includes maintenance, conversion and repair documents; certificates, manuals, ship's plans, drawings and technical specifications; product information data sheets (such as Material Declarations); and hazardous material inventories or recycling information from sister ships. Potential sources of information could include previous shipowners, the ship builder, historical societies, classification society records and ship recycling facilities with experience working with similar ships.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 6

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
4.2.6 Assessment of collected information (step 2)

The information collected in step 1 above should be assessed. The assessment should cover all materials listed in table A of appendix 1; materials listed in table B should be assessed as

4.2.6 Assessment of collected information (step 2)

The information collected in step 1 above should be assessed. The assessment should cover all materials listed in table A of appendix 1; materials listed in table B should be assessed as far as practicable. The results of the assessment should be reflected in the visual/sampling check plan.

4.2.7 Preparation of visual/sampling check plan (step 3)

4.2.7.1 To specify the materials listed in appendix 1 of these guidelines, a visual/sampling check plan should be prepared taking into account the collated information and any appropriate expertise. The visual/sampling check plan should be based on the following three lists:

.1 List of equipment, system and/or area for visual check (any equipment, system and/or area specified regarding the presence of the materials listed in appendix 1 by document analysis should be entered in the List of equipment, system and/or area for visual check);

.2 List of equipment, system and/or area for sampling check (any equipment, system and/or area which cannot be specified regarding the presence of the materials listed in appendix 1 by document or visual analysis should be

.2 List of equipment, system and/or area for sampling check (any equipment, system and/or area which cannot be specified regarding the presence of the materials listed in appendix 1 by document or visual analysis should be entered in the List of equipment, system and/or area as requiring sampling check. A sampling check is the taking of samples to identify the presence or absence of hazardous material contained in the equipment, systems, and/or areas, by suitable and generally accepted methods such as laboratory analysis); and

.3 List of equipment, system and/or area classed as "potentially containing hazardous material" (any equipment, system and/or area which cannot be specified regarding the presence of the materials listed in appendix 1 by document analysis may be entered in the List of equipment, system and/or area classed as "potentially containing hazardous material" without the sampling check. The prerequisite for this classification is a comprehensible justification such as the impossibility of conducting sampling without compromising the safety of the ship and its operational efficiency).

sampling check. The prerequisite for this classification is a comprehensible justification such as the impossibility of conducting sampling without compromising the safety of the ship and its operational efficiency).

4.2.7.2 Visual/sampling checkpoints should be all points where:

.1 the presence of materials to be considered for the Inventory part I as listed in appendix 1 is likely;

.2 the documentation is not specific; or

.3 materials of uncertain composition were used.

4.2.8 Onboard visual/sampling check (step 4)

4.2.8.1 The onboard visual/sampling check should be carried out in accordance with the visual/sampling check plan. When a sampling check is carried out, samples should be taken and the sample points should be clearly marked on the ship plan and the sample results should be referenced. Materials of the same kind may be sampled in a representative manner. Such materials are to be checked to ensure that they are of the same kind. The sampling check should be carried out drawing upon expert assistance.

sampling check should be carried out drawing upon expert assistance.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 7

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
4.2.8.2 Any uncertainty regarding the presence of hazardous materials should be clarified by a visual/sampling check. Checkpoints should be documented in the ship's plan and may be supported by photographs.

4.2.8.3 If the equipment, system and/or area of the ship are not accessible for a visual check or sampling check, they should be classified as "potentially c ontaining hazardous material". The prerequisite for such classification should be the same prerequisite as in section 4.2.7. Any equipment, system and/or area classed as "potentially containing Hazardous Material" may be investigated or subjected to a sampling check at the request of the shipowner during a later survey (e.g. during repair, refit or conversion).

4.2.9 Preparation of part I of the Inventory and related documentation (step 5)

the shipowner during a later survey (e.g. during repair, refit or conversion).

4.2.9 Preparation of part I of the Inventory and related documentation (step 5)

If any equipment, system and/or area is classed as either "containing hazardous material" or "potentially containing hazardous material", their approximate quantity and location should be listed in part I of the Inventory. These two categories should be indicated separately in the "Remarks" column of the Inventory.

4.2.10 Testing methods

4.2.10.1 Samples may be tested by a variety of methods. "Indicative" or "field tests" may be used when:

.1 the likelihood of a hazard is high;

.2 the test is expected to indicate that the hazard exists; and

.3 the sample is being tested by "specific testing" to show that the hazard is present.

4.2.10.2 Indicative or field tests are quick, inexpensive and useful on board the ship or on site, but they cannot be accurately reproduced or repeated, and cannot identify the hazard specifically, and therefore cannot be relied upon except as "indicators".

4.2.10.3 In all other cases, and in order to avoid dispute, "specific testing" should be used.

specifically, and therefore cannot be relied upon except as "indicators".

4.2.10.3 In all other cases, and in order to avoid dispute, "specific testing" should be used. Specific tests are repeatable, reliable and can demonstrate definitively whether a hazard exists or not. They will also provide a known type of the hazard. The methods indicated are found qualitative and quantitative appropriate and only testing methods to the same effect can be used. Specific tests are to be carried out by a suitably accredited laboratory, working to international standards2 or equivalent, which will provide a written report that can be relied upon by all parties.

4.2.10.4 Specific test methods for appendix 1 materials are provided in appendix 9.

4.2.11 Diagram of the location of hazardous materials on board a ship

Preparation of a diagram showing the location of the materials listed in table A is recommended in order to help ship recycling facilities gain a visual understanding of the Inventory.

2 For example ISO 17025.

Inventory.

2 For example ISO 17025.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 8

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
4.3 Maintaining and updating part I of the Inventory during operations

4.3.1 Part I of the Inventory should be appropriately maintained and updated, especially after any repair or conversion or sale of a ship.

4.3.2 Updating of part I of the Inventory in the event of new installation

If any machinery or equipment is added to, removed or replaced or the hull coating is renewed, part I of the Inventory should be updated according to the requirements for new ships as stipulated in paragraphs 4.1.2 to 4.1.4. Updating is not required if identical parts or coatings are installed or applied.

4.3.3 Continuity of part I of the Inventory

Part I of the Inventory should belong to the ship and the continuity and conformity of the information it contains should be confirmed, especially if the flag, owner or operator of the ship changes.

Part I of the Inventory should belong to the ship and the continuity and conformity of the information it contains should be confirmed, especially if the flag, owner or operator of the ship changes.

4.4 Development of part II of the Inventory (operationally generated waste)

4.4.1 Once the decision to recycle a ship has been taken, part II of the Inventory should be developed before the final survey, taking into account that a ship destined to be recycled shall conduct operations in the period prior to entering the Ship Recycling Facility in a manner that minimizes the amount of cargo residues, fuel oil and wastes remaining on board (regulation 8.2 of the Convention).

4.4.2 Operationally generated wastes to be listed in the Inventory

If the wastes listed in part II of the Inventory provided in table C (Potentially hazardous items) of appendix 1 are intended for delivery with the ship to a ship recycling facility, the quantity of the operationally generated wastes should be estimated and their approximate quantities and locations should be listed in part II of the Inventory.

4.5 Development of part III of the Inventory (stores)

the operationally generated wastes should be estimated and their approximate quantities and locations should be listed in part II of the Inventory.

4.5 Development of part III of the Inventory (stores)

4.5.1 Once the decision to recycle has been taken, part III of the Inventory should be developed before the final survey, taking into account the fact that a ship destined to be recycled shall minimize the wastes remaining on board (regulation 8.2 of the Convention). Each item listed in part III should correspond to the ship's operations during its last voyage.

4.5.2 Stores to be listed in the Inventory

If the stores to be listed in part III of the Inventory provided in table C of appendix 1 are to be delivered with the ship to a s hip recycling facility, the unit (e.g. capacity of cans and cylinders), quantity and location of the stores should be listed in part III of the Inventory.

4.5.3 Liquids and gases sealed in ship's machinery and equipment to be listed in the Inventory

If any liquids and gases listed in table C of appendix 1 are integral in machinery and

4.5.3 Liquids and gases sealed in ship's machinery and equipment to be listed in the Inventory

If any liquids and gases listed in table C of appendix 1 are integral in machinery and equipment on board a ship, their approximate quantity and location should be listed in part III of the Inventory. However, small amounts of lubricating oil, anti-seize compounds and grease which are applied to or injected into machinery and equipment to maintain normal performance do not fall within the scope of this provision. For subsequent completion of
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 9

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
part III of the Inventory during the recycling preparation processes, the quantity of liquids and gases listed in table C of appendix 1 required for normal operation, including the related pipe system volumes, should be prepared and documented at the design and construction stage . This information belongs to the ship, and continuity of this information should be maintained

system volumes, should be prepared and documented at the design and construction stage . This information belongs to the ship, and continuity of this information should be maintained if the flag, owner or operator of the ship changes.

4.5.4 Regular consumable goods to be listed in the Inventory

Regular consumable goods, as provided in table D of appendix 1 should not be listed in part I or part II but should be listed in part III of the Inventory if they are to be delivered with the ship to a Ship Recycling Facility. A general description including the name of item (e.g. TV set), manufacturer, quantity and location should be entered in part III of the Inventory. The check on materials provided for in paragraphs 4.1.2 and 4.1.3 of the se guidelines does not apply to regular consumable goods.

4.6 Description of location of hazardous materials on board

The locations of hazardous materials on board should be described and identified using the name of location (e.g. second floor of engine-room, bridge DK, APT, No.1 cargo tank , frame number) given in the plans (e.g. general arrangement, fire and safety plan, machinery arrangement or tank arrangement).

name of location (e.g. second floor of engine-room, bridge DK, APT, No.1 cargo tank , frame number) given in the plans (e.g. general arrangement, fire and safety plan, machinery arrangement or tank arrangement).

4.7 Description of approximate quantity of hazardous materials

In order to identify the approximate quantity of hazardous materials, the standard unit used for hazardous materials should be kg, unless other units (e.g. m 3 for materials of liquid or gases, m 2 for materials used in floors or walls) are considered more appropriate .
An approximate quantity should be rounded up to at least two significant figures.

5 REQUIREMENTS FOR ASCERTAINING THE CONFORMITY OF THE INVENTORY

5.1 Design and construction stage

The conformity of part I of the Inventory at the design and construction stage should be ascertained by reference to the collected Supplier's Declaration of Conformity described in section 7 and the related Material Declarations collected from suppliers.

5.2 Operational stage

Shipowners should implement the following measures in order to ensure the conformity of part I of the Inventory:

section 7 and the related Material Declarations collected from suppliers.

5.2 Operational stage

Shipowners should implement the following measures in order to ensure the conformity of part I of the Inventory:

.1 to designate a person as responsible for maintaining and updating the Inventory (the designated person may be employed ashore or on board);

.2 the designated person, in order to implement paragraph 4.3.2, should establish and supervise a system to ensure the necessary updating of the Inventory in the event of new installation;

.3 to maintain the Inventory including dates of changes or new deleted entries and the signature of the designated person; and

.4 to provide related documents as required for the survey or sale of the ship.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 10

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
6 MATERIAL DECLARATION

6.1 General

Suppliers to the shipbuilding industry should identify and declare whether or not the materials

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

6 MATERIAL DECLARATION

6.1 General

Suppliers to the shipbuilding industry should identify and declare whether or not the materials listed in table A or table B are present above the threshold value specified in appendix 1 of these guidelines. However, this provision does not apply to chemicals which do not constitute a part of the finished product.

6.2 Information required in the declaration

6.2.1 At a minimum the following information is required in the Material Declaration:

.1 date of declaration;

.2 Material Declaration identification number;

.3 supplier's name;

.4 product name (common product name or name used by manufacturer);

.5 product number (for identification by manufacturer);

.6 declaration of whether or not the materials listed in table A and table B of appendix 1 of these guidelines are present in the product above the threshold value stipulated in appendix 1 of these guidelines; and

.7 mass of each constituent material listed in table A and/or table B of appendix 1 of these guidelines if present above threshold value.

threshold value stipulated in appendix 1 of these guidelines; and

.7 mass of each constituent material listed in table A and/or table B of appendix 1 of these guidelines if present above threshold value.

6.2.2 An example of the Material Declaration is shown in appendix 6.

7 SUPPLIER'S DECLARATION OF CONFORMITY

7.1 Purpose and scope

7.1.1 The purpose of the Supplier's Declaration of Conformity is to provide assurance that the related Material Declaration conforms to section 6.2, and to identify the responsible entity.

7.1.2 The Supplier's Declaration of Conformity remains valid as long as the products are present on board.

7.1.3 The supplier compiling the Supplier's Declaration of Conformity should establish a company policy 3. The company policy on the management of the chemical substances in products which the supplier manufactures or sells should cover:

.1 Compliance with law:

The regulations and requirements governing the management of chemical substances in products should be clearly described in documents which should be kept and maintained; and

The regulations and requirements governing the management of chemical substances in products should be clearly described in documents which should be kept and maintained; and

3 A recognized quality management system may be utilized.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 11

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
.2 Obtaining of information on chemical substance content:

In procuring raw materials for components and products, suppliers should be selected following an evaluation, and the information on the chemical substances they supply should be obtained.

7.2 Contents and format

7.2.1 The Supplier's Declaration of Conformity should contain the following:

.1 unique identification number;

.2 name and contact address of the issuer;

.3 identification of the subject of the Declaration of Conformity (e.g. name, type, model number, and/or other relevant supplementary information);

.4 statement of conformity;

.5 date and place of issue; and

.3 identification of the subject of the Declaration of Conformity (e.g. name, type, model number, and/or other relevant supplementary information);

.4 statement of conformity;

.5 date and place of issue; and

.6 signature (or equivalent sign of validation), name and function of the authorized person(s) acting on behalf of the issuer.

7.2.2 An example of the Supplier's Declaration of Conformity is shown in appendix 7.

8 LIST OF APPENDICES

Appendix 1: Items to be listed in the Inventory of Hazardous Materials

Appendix 2: Standard format of the Inventory of Hazardous Materials

Appendix 3: Example of the development process for part I of the Inventory for new ships

Appendix 4: Flow diagram for developing part I of the Inventory for existing ships

Appendix 5: Example of the development process for part I of the Inventory for existing ships

Appendix 6: Form of Material Declaration

Appendix 7: Form of Supplier's Declaration of Conformity

Appendix 8: Examples of table A and table B materials of appendix 1 with CAS-numbers

Appendix 9: Specific test methods

Appendix 10: Examples of radioactive sources

SOURCE: MEPC.269(68).pdf | Page 65

Appendix 8: Examples of table A and table B materials of appendix 1 with CAS-numbers

Appendix 9: Specific test methods

Appendix 10: Examples of radioactive sources

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 12

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
APPENDIX 1

ITEMS TO BE LISTED IN THE INVENTORY OF HAZARDOUS MATERIALS

Table A Materials listed in appendix 1 of the Annex to the Convention

No.	Materials	Inventory Threshold value Part I	Part II	Part III
A-1	Asbestos	x	0.1%4	
A-2	Polychlorinated biphenyls (PCBs)	x	50 mg/kg5	
A-3	Ozone depleting substances			
	CFCs	x	no threshold value6	
	Halons	x		
	Other fully halogenated CFCs	x		
	Carbon tetrachloride	x		
	1,1,1-Trichloroethane (Methyl chloroform)	x		
	Hydrochlorofluorocarbons	x		
	Hydrobromofluorocarbons	x		
	Methyl bromide	x		
	Bromochloromethane	x		
A-4	Anti-fouling systems containing organotin compounds as a biocide	x	2,500 mg total tin/kg7	

Hydrobromofluorocarbons x
Methyl bromide x
Bromochloromethane x
A-4 Anti-fouling systems containing organotin compounds as a biocide x 2,500 mg total tin/kg7

4 In accordance with regulation 4 of the Convention, for all ships, new installation of materials which contain asbestos shall be prohibited. According to the UN recommendation "Globally Harmonized System of Classification and Labelling of Chemicals (GHS)" adopted by the United Nations Economic and Social Council's Sub-Committee of Experts on the Globally Harmonized System of Classification and Labelling of Chemicals (UNSCEGHS), the UN 's Sub-Committee of Experts, in 2002 (published in 2003), carcinogenic mixtures classified as Category 1A (including asbestos mixtures) under the GHS are required to be labelled as carcinogenic if the ratio is more than 0.1%. However, if 1% is applied, this threshold value should be recorded in the Inventory and, if available, the Material Declaration and can be applied not later than five years after the entry into force of the Convention. The threshold value of 0.1% need not be

should be recorded in the Inventory and, if available, the Material Declaration and can be applied not later than five years after the entry into force of the Convention. The threshold value of 0.1% need not be retroactively applied to those Inventories and Material Declarations.

5 In accordance with regulation 4 of the Convention, for all ships, new installation of materials which contain PCBs shall be prohibited. The Organization set 50 mg/kg as the threshold value referring to the concentration level at which wastes, substances and articles containing, consisting of or contaminated with PCB are characterized as hazardous under the Basel Convention.

6 "No threshold value" is in accordance with the Montreal Protocol for reporting ODS. Unintentional trace contaminants should not be listed in the Material Declarations and in the Inventory.

7 This threshold value is based on the Guidelines for brief sampling of anti-fouling systems on ships (resolution MEPC.104(49)).

(resolution MEPC.104(49)).
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 13

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

Table B Materials listed in appendix 2 of the Annex to the Convention

No.	Materials	Inventory	Threshold value		
			Part I	Part II	Part III
B-1	Cadmium and cadmium compounds	x	100 mg/kg8		
B-2	Hexavalent chromium and hexavalent chromium compounds	x	1,000 mg/kg8		
B-3	Lead and lead compounds	x	1,000 mg/kg8		
B-4	Mercury and mercury compounds	x	1,000 mg/kg8		
B-5	Polybrominated biphenyl (PBBs)	x	50 mg/kg9		
B-6	Polybrominated diphenyl ethers (PBDEs)	x	1,000 mg/kg8		
B-7	Polychlorinated naphthalenes (more than 3 chlorine atoms)	x	50mg/kg10		
B-8	Radioactive substances	x	no threshold value11		
B-9	Certain shortchain chlorinated paraffins (Alkanes, C10-C13, chloro)	x	1%12		

8 The Organization set this as the threshold value referring to the Restriction of Hazardous Substances (RoHS Directive 2011/65/EU, Annex II).

8 The Organization set this as the threshold value referring to the Restriction of Hazardous Substances (RoHS Directive 2011/65/EU, Annex II).

9 The Organization set 50 mg/kg as the threshold value referring to the concentration level at which wastes, substances and articles containing, consisting of or contaminated with PBB are characterized as hazardous under the Basel Convention.

10 The Organization set 50 mg/kg as the threshol d value referring to the concentration level at which wastes, substances and articles containing, consisting of or contaminated with PCN are characterized as hazardous under the Basel Convention.

11 All radioactive sources should be included in the Material Declaration and in the Inventory. Radioactive source means radioactive material permanently sealed in a capsule or closely bonded and in a solid form that is used as a source of radiation. This includes consumer products and industrial gauges with radioactive materials. Examples are listed in appendix 10.

12 The Organization set 1% as the threshold value referring to the EU legislation that restricts Chlorinated

radioactive materials. Examples are listed in appendix 10.

12 The Organization set 1% as the threshold value referring to the EU legislation that restricts Chlorinated Paraffins from being placed on the market for use as substances or as constituents of other substances or preparations in concentrations higher than 1% (EU Regulation 1907/2006, Annex XVII Entry 42 and Regulation 519/2012).

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 14

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

Table C Potentially hazardous items

No.	Properties	Goods Inventory		
		Part I	Part II	Part III
C-1	Liquid Oiliness			
	Kerosene	x		
C-2	White spirit	x		
C-3	Lubricating oil	x		
C-4	Hydraulic oil	x		
C-5	Anti-seize compounds	x		
C-6	Fuel additive	x		
C-7	Engine coolant additives	x		
C-8	Antifreeze fluids	x		
C-9	Boiler and feed water treatment and test re-agents	x		
C-10	De-ioniser regenerating chemicals	x		
C-11	Evaporator dosing and descaling acids	x		
C-12	Paint stabilizers/rust stabilizers	x		
C-13	Solvents/thinners	x		

C-9 Boiler and feed water treatment and test re-agents x
C-10 De-ioniser regenerating chemicals x
C-11 Evaporator dosing and descaling acids x
C-12 Paint stabilizers/rust stabilizers x
C-13 Solvents/thinners x
C-14 Paints x
C-15 Chemical refrigerants x
C-16 Battery electrolyte x
C-17 Alcohol, methylated spirits x
C-18
Gas
Explosives/
inflammables
Acetylene x
C-19 Propane x
C-20 Butane x
C-21 Oxygen x
C-22
Green House
Gases
CO2 x
C-23 Perfluorocarbons (PFCs) x
C-24 Methane x
C-25 Hydrofluorocarbon (HFCs) x
C-27 Nitrous oxide (N2O) x
C-28 Sulfur hexafluoride (SF6) x
C-29
Liquid
Oiliness
Bunkers: fuel oil x
C-30 Grease x
C-31 Waste oil (sludge) x
C-32 Bilge and/or waste water generated by the after-treatment systems fitted on machineries x
C-33 Oily liquid cargo tank residues x
C-34

Ballast water x
C-35 Raw sewage x
C-36 Treated sewage x
C-37 Non-oily liquid cargo residues x
C-38 Gas Explosibility/ inflammability Fuel gas x
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1

C-37 Non-oily liquid cargo residues x
C-38 Gas Explosibility/ inflammability Fuel gas x
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 15

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

No. Properties Goods
Inventory
Part I Part II Part III
C-39
Solid
Dry cargo residues x
C-40 Medical waste/infectious waste x
C-41 Incinerator ash13 x
C-42 Garbage x
C-43 Fuel tank residues x
C-44 Oily solid cargo tank residues x
C-45 Oily or chemical contaminated rags x
C-46 Batteries (incl. lead acid batteries) x
C-47 Pesticides/insecticide sprays x
C-48 Extinguishers x
C-49 Chemical cleaner (incl. electrical equipment cleaner, carbon remover) x
C-50 Detergent/bleacher (could be a liquid) x
C-51 Miscellaneous medicines x
C-52 Fire fighting clothing and Personal protective equipment x
C-53 Dry tank residues x
C-54 Cargo residues x
C-55 Spare parts which contain materials listed in Table A or Table B x

Table D Regular consumable goods potentially containing hazardous materials14

C-53 Dry tank residues x
C-54 Cargo residues x
C-55 Spare parts which contain materials listed in Table A or Table B x

Table D Regular consumable goods potentially containing hazardous materials14

No.	Properties	Example	Inventory		
			Part I	Part II	Part III
D-1	Electrical and electronic equipment	Computers, refrigerators, printers, scanners, television sets, radio sets, video cameras, video recorders, telephones, consumer batteries, fluorescent lamps, filament bulbs, lamps			x
D-2	Lighting equipment	Fluorescent lamps, filament bulbs, lamps		x	
D-3	Non ship-specific furniture, interior and similar equipment	Chairs, sofas, tables, beds, curtains, carpets, garbage bins, bed-linen, pillows, towels, mattresses, storage racks, decoration, bathroom installations, toys, not structurally relevant or integrated artwork			x

13 Definition of garbage is identical to that in MARPOL Annex V. However, incinerator ash is classified separately because it may include hazardous substances or heavy metals.

x

13 Definition of garbage is identical to that in MARPOL Annex V. However, incinerator ash is classified separately because it may include hazardous substances or heavy metals.

14 This table does not include ship-specific equipment integral to ship operations, which has to be listed in part I of the inventory.

APPENDIX 2

STANDARD FORMAT OF THE INVENTORY OF HAZARDOUS MATERIALS15

Part I
Hazardous materials contained in the ship's structure and equipment

I-1 Paints and coating systems containing materials listed in table A and table B of appendix 1 of these guidelines

No.	Application of paint	Name of paint	Location	Materials (classification in appendix 1)	Approximate quantity	Remarks
1	Anti-drumming compound	Primer, xx Co., xx primer #300	Hull part	Lead	35.00 kg	
2	Anti-fouling	xx Co., xx coat #100	Underwater parts	TBT	120.00 kg	

Materials
(classification in
appendix 1)
Approximate
quantity Remarks
1 Anti-drumming compound Primer, xx Co., xx primer #300 Hull part Lead 35.00 kg
2 Anti-fouling xx Co., xx coat #100 Underwater parts TBT 120.00 kg

15 Examples of how to complete the Inventory are provided for guidance purposes only in accordance with paragraph 3.4 of the guidelines.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 17

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

I-2 Equipment and machinery containing materials listed in table A and table B of appendix 1 of these guidelines
No. Name of equipment and machinery Location
Materials
(classification in
appendix 1)
Parts where
used
Approximate
quantity Remarks

1 Switch board Engine control room Cadmium Housing coating 0.02 kg
Mercury Heat gauge <0.01 kg less than 0.01kg
2 Diesel engine, xx Co., xx #150 Engine room LeadCadmium BearingStarter for blower 0.02 kg

Approximate
quantity Remarks

1 Switch board Engine control room Cadmium Housing coating 0.02 kg
Mercury Heat gauge <0.01 kg less than 0.01kg
2 Diesel engine, xx Co., xx #150 Engine room LeadCadmium BearingStarter for blower 0.02 kg
3 Diesel engine, xx Co., xx #200 Engine-room Lead Starter for blower 0.01 kg Revised by XXX on Oct. XX, 2008 (revoking No.2)
4 Diesel generator (x 3) Engine-room Lead
Ingredient of
copper
compounds
0.01 kg
5 Radioactive level gauge No. 1 Cargo tank Radioactive substances Gauge 5 (1.8E+11) Ci (Bq) Radionuclides: 60Co

I-3 - Structure and hull containing materials listed in table A and table B of appendix 1 of these guidelines
No. Name of structural element Location
Materials
(classification
in appendix 1)
Parts where
used
Approximate
quantity Remarks
1 Wall panel Accommodation Asbestos Insulation 2,500.00 kg
2 Wall insulation Engine control room Lead Perforated plate 0.01 kg cover for insulation material
Asbestos Insulation 25.00 kg under perforated plates
3
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE

Asbestos Insulation 25.00 kg under perforated plates
3
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 18

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Part II
Operationally generated waste

No.	Location1	Name of item (classification in appendix 1) and detail (if any) of the item	Approximate quantity	Remarks
1	Garbage locker	Garbage (food waste)	35.00 kg	
2	Bilge tank	Bilgewater	15.00 m3	
3	No.1 cargo hold	Dry cargo residues (iron ore)	110.00 kg	
4	No.2 cargo hold	Waste oil (sludge) (crude)	120.00 kg	
5	No.1 ballast tank	Ballast water	2,500.00 m3	
		Sediments	250.00 kg	

1 The location of a part II or part III item should be entered in order based on its location, from a lower level to an upper level and from a fore part to an aft part. The location of
part I items is recommended to be described similarly, as far as practicable.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 19

part I items is recommended to be described similarly, as far as practicable.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 19

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Part III
Stores
III-1 - Stores

No.	Location1	Name of item (classification in appendix 1)	Unit quantity	Figure	Approximate quantity	Remarks2)
			m3			
			kg			
			kg			
Details are shown in the attached list.						
5	Paint stores	Paint, xx Co., #600	20.00 kg	5 pcs	100.00 kg	Cadmium containing.

1 The location of a part II or part III item should be entered in order based on its location, from a lower level to an upper l evel and from a fore part to an aft
part. The location of part I items is recommended to be described similarly, as far as practicable.
2 In column "Remarks" for part III items, if hazardous materials are integrated in products, the approximate amount of the cont ents should be shown as
far as possible.

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE

far as possible.

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 20

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

III-2 Liquids sealed in ship's machinery and equipment

No.	Type of liquids (classification in appendix 1)	Name of machinery or equipment	Location	Approximate quantity	Remarks
1	Hydraulic oil	Deck crane hydraulic oil system	Upper deck	15.00 m3	
		Deck machinery hydraulic oil system	Upper deck and bosun store	200.00 m3	
		Steering gear hydraulic oil system	Steering gear room	0.55 m3	
2	Lubricating oil	Main engine system	Engine-room	0.45 m3	
3	Boiler water treatment	Boiler	Engine-room	0.20 m3	

III-3 Gases sealed in ship's machinery and equipment

No.	Type of gases (classification in appendix 1)	Name of machinery or equipment	Location	Approximate quantity	Remarks
1	HFC	AC system	AC room	100.00 kg	
2	HFC	Refrigerated provision chamber machine	AC room	50.00 kg	

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE

1 HFC AC system AC room 100.00 kg
2 HFC Refrigerated provision chamber machine AC room 50.00 kg

III-4 Regular consumable goods potentially containing hazardous materials
No. Location16 Name of item Quantity Remarks
1 Accommodation Refrigerators 1
2 Accommodation Personal computers 2

16 The location of a part II or part III item should be entered in order based on its location, from a lower level to an upper level and from a fore part to an aft part. The location of
part I items is recommended to be described similarly, as far as practicable.

APPENDIX 3

EXAMPLE OF THE DEVELOPMENT PROCESS FOR PART I

2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 22

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
APPENDIX 3

EXAMPLE OF THE DEVELOPMENT PROCESS FOR PART I
OF THE INVENTORY FOR NEW SHIPS

1 OBJECTIVE OF THE TYPICAL EXAMPLE

This example has been developed to give guidance and to facilitate understanding of the development process for part I of the Inventory of Hazardous Materials for new ships.

2 DEVELOPMENT FLOW FOR PART I OF THE INVENTORY

Part I of the Inventory should be developed using the following three steps. However, the order of these steps is flexible and can be changed depending on the schedule of shipbuilding:

.1 collection of hazardous materials information;

.2 utilization of hazardous materials information; and

.3 preparation of the Inventory (by filling out standard format).

3 COLLECTION OF HAZARDOUS MATERIALS INFORMATION

3.1 Data collection process for hazardous materials


Materials Declaration (MD) and Supplier's Declaration of Conformity (SDoC) for products

3 COLLECTION OF HAZARDOUS MATERIALS INFORMATION

3.1 Data collection process for hazardous materials

Materials Declaration (MD) and Supplier's Declaration of Conformity (SDoC) for products from suppliers (tier 1 suppliers) should be requested and collected by the shipbuilding yard. Tier 1 suppliers may request from their suppliers (tier 2 suppliers) the relevant information if they cannot develop the MD based on the information available. Thus the collection of data on hazardous materials may involve the entire shipbuilding supply chain (Figure 1).

Figure 1 Process of MD (and SDoC) collection showing involvement of supply chain

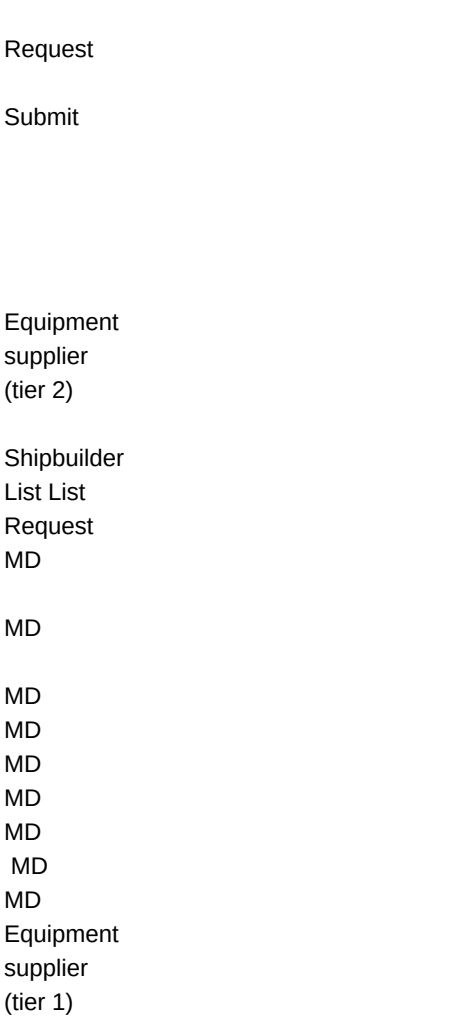

3.2 Declaration of hazardous materials

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
3.2 Declaration of hazardous materials

Suppliers should declare whether or not the hazardous materials listed in table A and table B in the MD are present in concentrations above the threshold values specified for each homogeneous material in a product.

3.2.1 Materials listed in table A

If one or more materials listed in table A are found to be present in concentrations above the specified threshold value according to the MD, the products which contain these materials shall not be installed on a ship. However, if the materials are used in a product in accordance with an exemption specified by the Convention (e.g. new installations containing hydrochlorofluorocarbons (HCFCs) before 1 January 2020), the product should be listed in the Inventory.

3.2.2 Materials listed in table B

If one or more materials listed in table B are found to be present in concentrations above the specified threshold value according to the MD, the products should be listed in the Inventory.

the Inventory.

3.2.2 Materials listed in table B

If one or more materials listed in table B are found to be present in concentrations above the specified threshold value according to the MD, the products should be listed in the Inventory.

3.3 Example of homogeneous materials

Figure 2 shows an example of four homogeneous materials which constitute a cable. In this case, sheath, intervention, insulator and conductor are all individual homogeneous materials.

Figure 2 Example of homogeneous materials (cable)

4 UTILIZATION OF HAZARDOUS MATERIALS INFORMATION

Products which contain hazardous materials in concentrations above the specified threshold values should be clearly identified in the MD. The approximate quantity of the hazardous materials should be calculated if the mass data for hazardous materials are declared in the MD using a unit which cannot be directly utilized in the Inventory.

5 PREPARATION OF INVENTORY (BY FILLING OUT STANDARD FORMAT)

The information received for the Inventory, as contained in table A and table B of appendix 1 of these guidelines, ought to be structured and utilized according to the following

5 PREPARATION OF INVENTORY (BY FILLING OUT STANDARD FORMAT)

The information received for the Inventory, as contained in table A and table B of appendix 1 of these guidelines, ought to be structured and utilized according to the following categorization for part I of the Inventory:

Part I-1 Paints and coating systems;

Part I-2 Equipment and machinery; and

Part I-3 Structure and hull.

Sheath
(PVC)
Intervention
(paper)
Insulator
(rubber)
Conductor
(copper)
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 24

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
5.1 "Name of equipment and machinery" column

5.1.1 Equipment and machinery

5.1.1.1 The name of each item of equipment or machinery should be entered in this column. If more than one hazardous material is present in the equipment or machinery, the row relating to that equipment or machinery should be appropriately divided such that all of the hazardous materials contained in the piece of equipment or machinery are entered. If more

relating to that equipment or machinery should be appropriately divided such that all of the hazardous materials contained in the piece of equipment or machinery are entered. If more than one item of equipment or machinery is situated in one location, both name and quantity of the equipment or machinery should be entered in the column. Examples are shown in rows 1 and 2 of table 1

5.1.1.2 For identical or common items, such as but not limited to bolts, nuts and valves, there is no need to list each item individually (see Bulk Listing in paragraph 3.2 of the guidelines). An example is shown in row 3 of table 1.

Table 1 Example showing more than one item of equipment or machinery situated in one location

No. Name of equipment and machinery Location Materials (classification in appendix 1) Parts where used Approximate quantity Remarks
1 Main engine Engine-room
Lead Piston pin bush 0.75 kg
Mercury
Thermometer
charge air
temperature
0.01 kg
2 Diesel generator (x 3) Engine-room Mercury Thermometer 0.03 kg
3 FC valve (x 100) Througout the ship Lead and lead compounds 20.5 kg

5.1.2 Pipes and cables

Mercury
Thermometer
charge air
temperature
0.01 kg
2 Diesel generator (x 3) Engine-room Mercury Thermometer 0.03 kg
3 FC valve (x 100) Througout the ship Lead and lead compounds 20.5 kg

5.1.2 Pipes and cables

The names of pipes and of systems, including electric cables, which are often situated in more than one compartment of a ship, should be described using the name of the system concerned. A reference to the compartments where these systems are located is not necessary as long as the system is clearly identified and properly named.

5.2 "Approximate quantity" column

The standard unit for approximate quantity of solid hazardous materials should be kg.
If the hazardous materials are liquids or gases, the standard unit should be either m 3 or kg.
An approximate quantity should be rounded up to at least two significant figures. If the hazardous material is less than 10 g, the description of the quantity should read "<0.01 kg".

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 25

Table 2 Example of a switchboard

No. Name of equipment and machinery Location Materials (classification in appendix 1) Parts where used Approximate quantity Remarks
Switchboard Engine control room
Cadmium Housing coating 0.02 kg
Mercury Heat gauge <0.01 kg less than 0.01 kg

5.3 "Location" column

5.3.1 Example of a location list

It is recommended to prepare a location list which covers all compartments of a ship based on the ship's plans (e.g. general arrangement, engine-room arrangement, accommodation and tank plan) and on other documentation on board, including certificates or spare parts' lists. The description of the location should be based on a location such as a deck or room to enable easy identification. The name of the location should correspond to the ship's plans so as to ensure consistency between the Inventory and the ship's plans. Examples of names of

enable easy identification. The name of the location should correspond to the ship's plans so as to ensure consistency between the Inventory and the ship's plans. Examples of names of locations are shown in table 3. For bulk listings, the locations of the items or materials may be generalized. For example, the location may only include the primary classification such as "Throughout the ship" as shown in the table 3 below.

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 26

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Table 3 Examples of location names

(A) Primary classification (B) Secondary classification (C) Name of location
Throughout the ship
Hull part Fore part Bosun store

Cargo part No.1 cargo hold/tank
No.1 garage deck

Tank part Fore peak tank
No.1 WBT
No.1 FOT

Aft Peak Tank
Aft part Steering gear room
Emergency fire pump space

Superstructure Accommodation
Compass deck
Nav. bridge deck

Wheel house

SOURCE: MEPC.269(68).pdf | Page 115

No.1 WBT
No.1 FOT

Aft Peak Tank
Aft part Steering gear room
Emergency fire pump space

Superstructure Accommodation
Compass deck
Nav. bridge deck

Wheel house
Engine control room
Cargo control room

Deck house Deck house

(A) Primary classification (B) Secondary classification (C) Name of location
Machinery part Engine-room Engine-room
Main floor
2nd floor

Generator space/room
Purifier space/room
Shaft space/room
Engine casing
Funnel
Engine control room

Pump-room Pump-room

Exterior part Superstructure Superstructure
Upper deck Upper deck
Hull shell Hull shell
bottom
under waterline

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 27

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
5.3.2 Description of location of pipes and electrical systems

INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 27

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
5.3.2 Description of location of pipes and electrical systems

5.3.2.1 Locations of pipes and systems, including electrical systems and cables situated in more than one compartment of a ship, should be described for each system concerned. If they are situated in a number of compartments, the most practical of the following tw o options should be used:

.1 listing of all components in the column; or

.2 description of the location of the system using an expression such as those shown under "primary classification" and "secondary classification" in Table 3.

5.3.2.2 A typical description of a pipe system is shown in table 4.

Table 4 Example of description of a pipe system

No.
Name of equipment and machinery
Location
Materials (classification in appendix 1)
Parts where used
Approximate quantity
Remarks
Ballast water system
Engine-room, Hold
parts

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1

where
used
Approximate
quantity Remarks
Ballast water system Engine-room, Hold parts

APPENDIX 4

FLOW DIAGRAM FOR DEVELOPING PART I OF THE INVENTORY FOR EXISTING SHIPS

APPENDIX 5

EXAMPLE OF THE DEVELOPMENT PROCESS FOR
PART I OF THE INVENTORY FOR EXISTING SHIPS

1 INTRODUCTION

1.1 In order to devel op part I of the Inventory of Hazardous Materials for existing ships , documents of the individual ship as well as the knowledge and experience of specialist personnel (experts) is required. An example of the development process for Part I of the Inventory of Hazardous Materials for existing ships is useful to understand the basic steps as

personnel (experts) is required. An example of the development process for Part I of the Inventory of Hazardous Materials for existing ships is useful to understand the basic steps as laid out in the guidelines and to ensure a unified application. However, attention should be paid to variations in different types of ships17.

1.2 Compilation of part I o f the Inventory of Hazardous Material for existing ships involves the following five steps which are described in paragraph 4.2 and appendix 4 of these guidelines.

Step 1: Collection of necessary information;

Step 2: Assessment of collected information;

Step 3: Preparation of visual/sampling check plan;

Step 4: Onboard visual/sampling check; and

Step 5: Preparation of part I of the Inventory and related documentation.

2 STEP 1 COLLECTION OF NECESSARY INFORMATION

2.1 Sighting of available documents

A practical first step is to collect detailed documents for the ship. The shipowner should try to collate documents normally retained on board the ship or by the shipping company as well as relevant documents that the shipyard, manufacturers, or classification society may have. The

collate documents normally retained on board the ship or by the shipping company as well as relevant documents that the shipyard, manufacturers, or classification society may have. The following documents should be used when available:

.1 Ship's specification
.2 General Arrangement
.3 Machinery Arrangement
.4 Spare Parts and Tools List
.5 Piping Arrangement
.6 Accommodation Plan
.7 Fire Control Plan
.8 Fire Protection Plan
.9 Insulation Plan (Hull and Machinery)
.10 International Anti-Fouling System Certificate
.11 Related manuals and drawings
.12 Information from other inventories and/or sister or similar ships, machinery, equipment, materials and coatings
.13 Results of previous visual/sampling checks and other analysis

17 The example of a 28,000 gross tonnage bulk carrier constructed in 1985 is used in this appendix.

2.1.2 If the ship has undergone conversions or major repair work, it is necessary to identify as far as possible the modifications from the initial design and specification of the ship.

2.2 Indicative list

2.2.1 It is impossible to check all equipment, systems, and/or areas on board the ship to determine the presence or absence of hazardous materials. The total number of parts on board may exceed several thousand. In order to take a practical approach, an indicative list should be prepared that identifies the equipment, system, and/or area on board that is presumed to contain hazardous materials. Field interviews with the shipyard and suppliers may be necessary to prepare such lists. A typical example of an indicative list is shown below.

2.2.2 Materials to be checked and documented

Hazardous Materials, as identified in appendix 1 of these guidelines, should be listed in part I

may be necessary to prepare such lists. A typical example of an indicative list is shown below.

2.2.2 Materials to be checked and documented

Hazardous Materials, as identified in appendix 1 of these guidelines, should be listed in part I of the Inventory for existing ships. Appendix 1 of the guidelines contains all the materials concerned. Table A shows those which are required to be listed and table B shows those which should be listed as far as practicable.

2.2.3 Materials listed in table A

2.2.3.1 Table A lists the following four materials:

.1 Asbestos
.2 Polychlorinated biphenyls (PCBs)
.3 Ozone depleting substances
.4 Anti-fouling systems containing organotin compounds as a biocide

2.2.3.2 Asbestos

Field interviews were conducted with over 200 Japanese shipyards and suppliers regarding the use of asbestos in production. Indicative lists for asbestos developed on the basis of this research are shown below:

Structure and/or equipment Component
Propeller shafting Packing with low pressure hydraulic piping flange
Packing with casing
Clutch
Brake lining
Synthetic stern tubes
Diesel engine Packing with piping flange

research are shown below:

Structure and/or equipment Component
Propeller shafting Packing with low pressure hydraulic piping flange
Packing with casing
Clutch
Brake lining
Synthetic stern tubes
Diesel engine Packing with piping flange
Lagging material for fuel pipe
Lagging material for exhaust pipe
Lagging material turbocharger
Turbine engine Lagging material for casing
Packing with flange of piping and valve for steam line,
exhaust line and drain line
Lagging material for piping and valve of steam line,
exhaust line and drain line
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 31

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Structure and/or equipment Component
Boiler Insulation in combustion chamber
Packing for casing door
Lagging material for exhaust pipe
Gasket for manhole
Gasket for hand hole
Gas shield packing for soot blower and other hole
Packing with flange of piping and valve for steam line,
exhaust line, fuel line and drain line
Lagging material for piping and valve of steam line,

Gasket for manhole
Gasket for hand hole
Gas shield packing for soot blower and other hole
Packing with flange of piping and valve for steam line, exhaust line, fuel line and drain line
Lagging material for piping and valve of steam line, exhaust line, fuel line and drain line
Exhaust gas economizer Packing for casing door
Packing with manhole
Packing with hand hole
Gas shield packing for soot blower
Packing with flange of piping and valve for steam line, exhaust line, fuel line and drain line
Lagging material for piping and valve of steam line, exhaust line, fuel line and drain line
Incinerator Packing for casing door
Packing with manhole
Packing with hand hole
Lagging material for exhaust pipe
Auxiliary machinery (pump, compressor, oil purifier, crane)
Packing for casing door and valve
Gland packing
Brake lining
Heat exchanger Packing with casing
Gland packing for valve
Lagging material and insulation
Valve Gland packing with valve, sheet packing with piping flange
Gasket with flange of high pressure and/or high temperature
Pipe, duct Lagging material and insulation
Tank (fuel tank, hot water, tank, condenser), other equipment

Valve Gland packing with valve, sheet packing with piping flange
Gasket with flange of high pressure and/or high temperature
Pipe, duct Lagging material and insulation
Tank (fuel tank, hot water, tank, condenser), other equipment (fuel strainer, lubricant oil strainer)
Lagging material and insulation
Electric equipment Insulation material
Airborne asbestos Wall, ceiling
Ceiling, floor and wall in accommodation area
Ceiling, floor, wall
Fire door Packing, construction and insulation of the fire door
Inert gas system Packing for casing, etc.
Air-conditioning system Sheet packing, lagging material for piping and flexible joint

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 32

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Structure and/or equipment Component
Miscellaneous Ropes
Thermal insulating materials
Fire shields/fire proofing
Space/duct insulation
Electrical cable materials
Brake linings
Floor tiles/deck underlay
Steam/water/vent flange gaskets
Adhesives/mastics/fillers
Sound damping

Miscellaneous Ropes
Thermal insulating materials
Fire shields/fire proofing
Space/duct insulation
Electrical cable materials
Brake linings
Floor tiles/deck underlay
Steam/water/vent flange gaskets
Adhesives/mastics/fillers
Sound damping
Moulded plastic products
Sealing putty
Shaft/valve packing
Electrical bulkhead penetration packing
Circuit breaker arc chutes
Pipe hanger inserts
Weld shop protectors/burn covers
Fire-fighting blankets/clothing/equipment
Concrete ballast

2.2.3.3 Polychlorinated biphenyl (PCBs)

Worldwide restriction of PCBs began on 17 May 2004 as a result of the implementation of the Stockholm Convention, which aims to eliminate or restrict the production and use of persistent organic pollutants. In Japan, domestic control began in 1973, with the prohibition of all activities relating to the production, use and import of PCBs. Japanese suppliers can provide accurate information concerning their products. The indicative list of PCBs has been developed as shown below:

Equipment Component of equipment
Transformer Insulating oil
Condenser Insulating oil
Fuel heater Heating medium
Electric cable Covering, insulating tape

developed as shown below:

Equipment Component of equipment
Transformer Insulating oil
Condenser Insulating oil
Fuel heater Heating medium
Electric cable Covering, insulating tape
Lubricating oil
Heat oil Thermometers, sensors, indicators
Rubber/felt gaskets
Rubber hose
Plastic foam insulation
Thermal insulating materials
Voltage regulators
Switches/reclosers/bushings
Electromagnets
Adhesives/tapes
Surface contamination of machinery
Oil-based paint
Caulking
Rubber isolation mounts
Pipe hangers
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 33

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Equipment Component of equipment
Light ballasts (component within fluorescent
light fixtures)

Plasticizers
Felt under septum plates on top of hull
bottom

2.2.3.4 Ozone depleting substances

The indicative list for ozone depleting substances is shown below. Ozone depleting substances have been controlled according to the Montreal Protocol and MARPOL Convention. Although

bottom

2.2.3.4 Ozone depleting substances

The indicative list for ozone depleting substances is shown below. Ozone depleting substances have been controlled according to the Montreal Protocol and MARPOL Convention. Although almost all substances have been banned since 1996, HCFC can still be used until 2020.

Materials	Component of equipment	Period for use of ODS in Japan
CFCs (R11, R12)	Refrigerant for refrigerators	Until 1996
CFCs	Urethane formed material	Until 1996
Blowing agent for insulation of LNG carriers		Until 1996
Halons	Extinguishing agent	Until 1994
Other fully halogenated CFCs	The possibility of usage in ships is low	Until 1996
Carbon tetrachloride	The possibility of usage in ships is low	Until 1996
1,1,1-Trichloroethane (methyl chloroform)	The possibility of usage in ships is low	Until 1996
HCFC (R22, R141b)	Refrigerant for refrigerating machine	It is possible to use it until 2020
HBFC	The possibility of usage in ships is low	Until 1996
Methyl bromide	The possibility of usage in ships is low	Until 2005

2.2.3.5 Organotin compounds

machine
It is possible to use it until 2020
HBFC The possibility of usage in
ships is low
Until 1996
Methyl bromide The possibility of usage in
ships is low
Until 2005

2.2.3.5 Organotin compounds

Organotin compounds include tributyl tins (TBT), triphenyl tins (TPT) and tributyl tin oxide (TBTO). Organotin compounds have been used as anti-fouling paint on ships' bottoms and the International Convention on the Control of Harmful Anti-Fouling Systems on Ships (AFS Convention) stipulates that all ships shall not apply or re-apply organotin compounds after 1 January 2003, and that, after 1 January 2008, all ships shall either not bear such compounds on their hulls or shall bear a coating that forms a barrier preventing such compounds from leaching into the sea. The above-mentioned dates may have been extended by permission of the Administration bearing in mind that the AFS Convention entered into force on 17 September 2008.

2.2.4 Materials listed in table B

For existing ships it is not obligatory for materials listed in table B to be listed in part I of the Inventory. However, if they can be identified in a practical way , they should be listed in the

2.2.4 Materials listed in table B

For existing ships it is not obligatory for materials listed in table B to be listed in part I of the Inventory. However, if they can be identified in a practical way , they should be listed in the Inventory, because the information will be used to support ship recycling processes. The Indicative list of materials listed in table B is shown below:

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 34

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

Materials	Component of equipment
Cadmium and cadmium compounds	Plating film, bearing
Hexavalent chromium compounds	Plating film
Mercury and mercury compounds	Fluorescent light, mercury lamp, mercury cell, liquid-level switch, gyro compass, thermometer, measuring tool, manganese cell, pressure sensors, light fittings, electrical switches, fire detectors
Lead and lead compounds	Corrosion resistant primer, solder (almost all electric appliances contain solder), paints, preservative coatings, cable insulation, lead ballast, generators

light fittings, electrical switches, fire detectors
Lead and lead compounds Corrosion resistant primer, solder (almost all electric appliances contain solder), paints, preservative coatings, cable insulation, lead ballast, generators
Polybrominated biphenyls (PBBs) Non-flammable plastics
Polybrominated diphenyl ethers (PBDE) Non-flammable plastics
Polychlorinated naphthalenes Paint, lubricating oil
Radioactive substances Refer to appendix 10
Certain shortchain chlorinated paraffins Non-flammable plastics

3 STEP 2 ASSESSMENT OF COLLECTED INFORMATION

Preparation of a checklist is an efficient method for developing the Inventory for existing ships in order to clarify the results of each step. Based on collected information including the indicative list mentioned in step 1, all equipment, systems, and/or areas on board assumed to contain hazardous materials listed in tables A and B should be included in the checklist. Each listed equipment, system, and/or area on board should be analysed and assessed for its hazardous materials content.

The existence and volume of hazardous materials may be judged and calculated from the

Each listed equipment, system, and/or area on board should be analysed and assessed for its hazardous materials content.

The existence and volume of hazardous materials may be judged and calculated from the Spare parts and tools list and the maker's drawings. The existence of asbestos contained in floors, ceilings and walls may be identified from Fire Protection Plans, while the existence of TBT in coatings can be identified from the International Anti-Fouling System Certificate, Coating scheme and the History of Paint.

Example of weight calculation

No. Hazardous Materials Location/equipment/ component Reference Calculation
1.1-2 TBT Flat bottom/paint History of coatings

1.2-1 Asbestos Main engine/ exh. pipe packing Spare parts and tools list 250 g x 14 sheet = 3.50 kg
1.2-3 HCFC Ref. provision plant Maker's drawings 20 kg x 1 cylinder = 20 kg
1.2-4 Lead Batteries Maker's drawings 6kg x 16 unit = 96 kg
1.3-1 Asbestos Engine-room ceiling Accommodation plan

When a component or coating is determined to contain hazardous materials, a "Y" should be entered in the column for "Result of document analysis" in the checklist, to denote

1.3-1 Asbestos Engine-room ceiling Accommodation
plan

When a component or coating is determined to contain hazardous materials, a "Y" should be entered in the column for "Result of document analysis" in the checklist, to denote "Contained". Likewise, when an item is determined not to contain Hazardous Materials, the entry "N" should be made in the column to denote "Not contained". When a determination cannot be made as to the hazardous materials content, the column should be completed with the entry "Unknown".
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 35

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 36

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
4 STEP 3 PREPARATION OF VISUAL/SAMPLING CHECK PLAN

4.1 Each item classified as "Contained" or "Not contained" in step 2 should be subjected

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

4 STEP 3 PREPARATION OF VISUAL/SAMPLING CHECK PLAN

4.1 Each item classified as "Contained" or "Not contained" in step 2 should be subjected to a visual check on board, and the entry "V" should be made in the "Check procedure" column to denote "Visual check".

4.2 For each item categorized as "unknown", a decision should be made as to whether to apply a sampling check. However, any item categorized as "unknown" may be classed as "potentially containing hazardous material" provided comprehensive justification is given, or if it can be assumed that there will be little or no effect on disassembly as a unit and later ship recycling and disposal operations. For example, in the following checklist, in order to carry out a sampling check for "Packing with aux. boiler" the shipowner needs to disassemble the auxiliary boiler in a repair yard. The costs of this check are significantly higher than the later disposal costs at a ship recycling facility. In this case, therefore, the classification as "potentially containing hazardous material" is justifiable.

disposal costs at a ship recycling facility. In this case, therefore, the classification as "potentially containing hazardous material" is justifiable.

4.3 Before any visual/sampling check on board is conducted, a "visual/sampling check plan" should be prepared. An example of such a plan is shown below.

4.4 To prevent any incidents during the visual/sampling check, a schedule should be established to eliminate interference with other ongoing work on board. To prevent potential exposure to Hazardous Materials during the visual/sampling check, safety precautions should be in place on board. For example, sampling of potential asbestos containing

exposure to Hazardous Materials during the visual/sampling check, safety precautions should be in place on board. For example, sampling of potential asbestos containing materials could release fibres into the atmosphere. Therefore, appropriate personnel safety and containment procedures should be implemented prior to sampling.

4.5 Items listed in the visual/sampling check should be arranged in sequence so that the onboard check is conducted in a structured manner (e.g. from a lower level to an upper level and from a fore part to an aft part).

Example of visual/sampling check plan

Name of ship XXXXXXXXXX
IMO Number XXXXXXXXXX
Gross Tonnage 28,000 GT
L x B x D xxx.xx × xx.xx × xx.xx m
Date of delivery dd.mm.1987
Shipowner XXXXXXXXXX
Contact point
(Address, Telephone, Fax, Email)
XXXXXXXXXX
Tel: XXXX-XXXX
Fax: XXXX-XXXX
Email: abcdefg@hijk.co.net
Check schedule Visual check dd, mm, 20XX
Sampling check dd, mm, 20XX
Site of check XX shipyard, No. Dock
In charge of check XXXX XXXX
Check engineer XXXX XXXX, YYYY YYYY, ZZZZ ZZZZ
Sampling engineer Person with specialized knowledge of sampling
Sampling method and anti-scattering
measure for asbestos

Site of check XX shipyard, No. Dock
In charge of check XXXX XXXX
Check engineer XXXX XXXX, YYYY YYYY, ZZZZ ZZZZ
Sampling engineer Person with specialized knowledge of sampling
Sampling method and anti-scattering
measure for asbestos
Wet the sampling location prior to cutting and allow it
to harden after cutting to prevent scatter.
Notes: Workers performing sampling activities shall
wear protective equipment.
Sampling of fragments of paints Paints suspected to contain TBT should be collected
and analysed from load line, directly under bilge keel
and flat bottom near amidships.
Laboratory QQQQ QQQQ
Chemical analysis method Method by ISO/DIS 22262-1 Bulk materials Part 1:
Sampling and qualitative determination of asbestos in
commercial bulk materials and ISO/CD 22262-2 Bulk
materials Part 2: Quantitative determination of
asbestos by gravimetric and microscopic methods.
ICP Luminous analysis (TBT)
Location of visual/sampling check Refer to lists for visual/sampling check

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 39

Location of visual/sampling check Refer to lists for visual/sampling check

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 39

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Listing for equipment, system and/or area for visual check
See attached "Analysis and definition of scope of investigation for sample ship"

List of equipment, system and/or area for sampling check
Location
Equipment,
machinery and/or
zone
Name of
parts Materials
Result of
doc.
checking
Upper Deck Back deck ceilings Engine-room
ceiling
Asbestos Unknown
Engine-room Exhaust gas pipe Insulation Asbestos Unknown
Engine-room Pipe/flange Gasket Asbestos Unknown

Refer to attached "Analysis and definition of scope of investigation for sample ship" and
"Location plan of hazardous materials for sample ship"

List of equipment, system and/or area classed as PCHM
Location
Equipment,
machinery and/or
zone
Name of part Material
Result of
doc.
checking
Floor Propeller cap Gasket Asbestos PCHM
Engine-room Air operated shut-off
valve

List of equipment, system and/or area classed as PCHM
Location
Equipment,
machinery and/or
zone
Name of part Material
Result of
doc.
checking
Floor Propeller cap Gasket Asbestos PCHM
Engine-room Air operated shut-off
valve
Gland
packing
Asbestos PCHM

Refer to attached "Analysis and definition of scope of investigation for sample ship" and "Location plan of hazardous materials for sample ship"

This plan is established in accordance with the guidelines for the development of the Inventory of Hazardous Materials

Document checkdate/place
dd, mm, 20XX at XX Lines Co. Ltd.

Preparation date of plandd. mm, 20XX

Prepared by XXXX XXXX
Tel. YYYY-YYYY
Email XXXX@ZZZZ.co.net
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 40

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
5 STEP 4 ONBOARD VISUAL/SAMPLING CHECK

5.1 The visual/sampling check should be conducted according to the plan. Check points

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
5 STEP 4 ONBOARD VISUAL/SAMPLING CHECK

5.1 The visual/sampling check should be conducted according to the plan. Check points should be marked in the ship's plan or recorded with photographs.

5.2 A person taking samples should be protected by the appropriate safety equipment relevant to the suspected type of hazardous materials encountered. Appropriate safety precautions should also be in place for passengers, crewmembers and other persons on board, to minimize the potential exposure to hazardous materials. Safety precautions could include the posting of signs or other verbal or written notification for personnel to avoid such areas during sampling. The personnel taking samples should ensure compliance with relevant national regulations.

5.3 The results of visual/sampling checks should be recorded in the checklist. Any equipment, systems and/or areas of the ship that cannot be accessed for checks should be classified as "potentially containing hazardous material". In this case, the entry in the "Result of check" column should be "PCHM".

equipment, systems and/or areas of the ship that cannot be accessed for checks should be classified as "potentially containing hazardous material". In this case, the entry in the "Result of check" column should be "PCHM".

6 STEP 5 PREPARATION OF PART I OF THE INVENTORY AND RELATED DOCUMENTATION

6.1 Development of part I of the Inventory

The results of the check and the estimated quantity of hazardous materials should be recorded on the checklist. Part I of the Inventory should be developed with reference to the checklist.

6.2 Development of location diagram of hazardous materials

With respect to part I of the Inventory, the development of a location diagram of hazardous materials is recommended in order to help the ship recycling facility gain a visual understanding of the Inventory.

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 41

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE

INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 41

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 42

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Example of the Inventory for existing ships

Inventory of Hazardous Materials for "Sample Ship"

Particulars of the "Sample Ship"

Distinctive number or letters XXXXNNN
Port of registry Port of World
Type of vessel Bulk carrier
Gross Tonnage 28,000 GT
IMO number NNNNNNN
Name of shipbuilder xx Shipbuilding Co. Ltd
Name of shipowner yy Maritime SA
Date of delivery MM/DD/1988

This inventory was developed in accordance with the guidelines for the development of the Inventory of Hazardous Materials.

Attachment:

1: Inventory of Hazardous Materials

2: Assessment of collected information

3: Location diagram of Hazardous Materials

Prepared by XYZ (Name & address) (dd/mm/20XX)

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)

SOURCE: MEPC.269(68).pdf | Page 169

Attachment:

1: Inventory of Hazardous Materials

2: Assessment of collected information

3: Location diagram of Hazardous Materials

Prepared by XYZ (Name & address) (dd/mm/20XX)

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 43

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Inventory of Hazardous Materials: "Sample Ship"

Part I hazardous materials contained in the ship's structure and equipment

I-1 Paints and coating systems containing materials listed in Table A and Table B of appendix 1 of the guidelines

No.	Application of paint	Name of paint	Location*	Materials (classification in appendix 1)	Approximate quantity	Remarks
1	AF paint	Unknown paints	Flat bottom	TBT	60.00 kg	Confirmed by sampling
2						
3						

I-2 Equipment and machinery containing materials listed in Table A and Table B of appendix 1 of the guidelines

No.	Name of equipment and machinery	Location *1	Materials (classification in appendix 1)	Parts where used	Approximate quantity	Remarks

No. Name of equipment and machinery Location *1
Materials
(classification in
appendix 1)
Parts where
used
Approximat
e quantity Remarks
1 Main engine Lower floor Asbestos Exh. pipe packing 3.50 kg
2 Aux. boiler
3rd deck
Asbestos Unknown packing 10.00 kg PCHM (potentially containing Hazardous Material)
3 Piping/flange Engine-room Asbestos Packing 50.00 kg PCHM
4 Ref. provision plant 2nd deck HCFC Refrigerant (R22) 20.00 kg
5 Batteries Navig. Bridge deck Lead 96.00 kg

I-3 Structure and hull containing materials listed in Table A and Table B of appendix 1 of the guidelines
No. Name of structural element Location *1
Materials
(classification in
appendix 1)
Parts where
used
Approximat
e quantity Remarks
1

Back deck ceiling

Upper deck Asbestos
Engine-room
ceiling
(A class)
3.80 kg Confirmed by sampling
2
3

* Each item should be entered in order based on its location, from a lower level to an upper level and from a fore part to an aft part.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 44

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Example of location diagram of hazardous materials

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 45

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
APPENDIX 6

FORM OF MATERIAL DECLARATION

<Date of declaration>
Date

<MD ID number> <Supplier (respondent) information>
MD- ID-No. Company name
Division name
<Other information> Address
Remark 1 Contact person
Remark 2 Telephone number
Remark 3 Fax number
Email address
SDoC ID no.

<Product information>
Product name Product number

Remark 3 Fax number
Email address
SDoC ID no.

<Product information>
Product name Product number
Delivered unit
Product information
Amount Unit

<Materials information> Piece kg m m3 litre
Unit Yes No g
This materials information shows the amount of hazardous materials contained in 1 (unit: piece, kg, m, m2, m3, etc.) of the product.

Table Material name Threshold value
Present
above threshold
value
If yes,
material mass If yes, information on where it is used
Yes / No Mass Unit
Table A

(materials
listed in
appendix 1
of the
Convention)
Asbestos Asbestos 0.1%18
Polychlorinated
biphenyls
(PCBs)
Polychlorinated biphenyls
(PCBs) 50 mg/kg
Ozone depleting
substance
Chlorofluorocaobons
(CFCs)
no threshold
value

Halons
Other fully halogenated
CFCs
Carbon tetrachloride
1,1,1-Trichloroethane
Hydrochlorofluorocaobons

(PCBs) 50 mg/kg
Ozone depleting substance
Chlorofluorocaobons (CFCs)
no threshold value

Halons
Other fully halogenated CFCs
Carbon tetrachloride
1,1,1-Trichloroethane
Hydrochlorofluorocaobons
Hydrobromofluorocaobons
Methyl bromide
Bromochloromethane
Anti-fouling systems containing organotin compounds as a biocide

2,500 mg total tin/kg

18 In accordance with regulation 4 of the Convention, for all ships, new installation of materials which contain asbestos shall be prohibited. According to the UN recommendation "Globally Harmonized System of Classification and Labelling of Chemicals (GHS)" adopted by the United Nations Economic and Social Council's Sub-Committee of Experts on the Globally Harmonized System of Classification and Labelling of Chemicals (UNSCEGHS), the UN'S Sub-Committee of Experts, in 2002 (published in 2003), carcinogenic mixtures classified as Category 1A (including asbestos mixtures) under the GHS are required to be

Chemicals (UNSCEGHS), the UN'S Sub-Committee of Experts, in 2002 (published in 2003), carcinogenic mixtures classified as Category 1A (including asbestos mixtures) under the GHS are required to be labelled as carcinogenic if the ratio is more than 0.1%. However, if 1% is applied, this threshold value should be recorded in the Inventory and, if available, the Material Declaration and can be applied not later than five years after the entry into force of the Convention. The threshold value of 0.1% need not be retroactively applied to those Inventories and Material Declarations.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 46

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc

Table Material name Threshold value
Present
above threshold
value
If yes,
material mass If yes, information on where it is used
Yes / No Mass Unit
Table B

(materials
listed in
appendix 2
of the
Convention)
Cadmium and cadmium compounds 100 mg/kg
Hexavalent chromium and hexavalent
chromium compounds 1,000 mg/kg

Yes / No Mass Unit
Table B

(materials
listed in
appendix 2
of the
Convention)
Cadmium and cadmium compounds 100 mg/kg
Hexavalent chromium and hexavalent
chromium compounds 1,000 mg/kg
Lead and lead compounds 1,000 mg/kg
Mercury and mercury compounds 1,000 mg/kg
Polybrominated biphenyl (PBBs) 50 mg/kg
Polybrominated dephenyl ethers (PBDEs) 1,000 mg/kg
Polychloronaphthalenes (Cl >= 3) 50 mg/kg
Radioactive substances no threshold value
Certain shortchain chlorinated paraffins 1%
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 47

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
APPENDIX 7

FORM OF SUPPLIER'S DECLARATION OF CONFORMITY

SUPPLIER'S DECLARATION OF CONFORMITY FOR MATERIAL DECLARATION MANAGEMENT

1

Identification number _____

2 Issuer's name

Issuer's address

3 Object(s) of the declaration

1

Identification number _____

2 Issuer's name

Issuer's address

3 Object(s) of the declaration

4 The object(s) of the declaration described above is in conformity with the followin g documents

Document No. Title Edition/date of issue

5

6 Additional information

Signed for and on behalf of

(place and date of issue)

7

(name, function) (signature)

(name, function) (signature)

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 48

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
APPENDIX 8

EXAMPLES OF TABLE A AND TABLE B MATERIALS OF APPENDIX 1
WITH CAS NUMBERS

This list was developed with reference to Joint Industry Guide No.101. This list is not exhaustive; it represents examples of chemicals with known CAS numbers and may require periodical updating.

Table	Material Category	Substances	CAS Numbers
Table A (materials listed in appendix 1 of the Convention)	Asbestos	Asbestos	1332-21-4
		Actinolite	77536-66-4
		Amosite (Grunerite)	12172-73-5
		Anthophyllite	77536-67-5
		Chrysotile	12001-29-5
		Crocidolite	12001-28-4
		Tremolite	77536-68-6
	Polychlorinated biphenyls (PCBs)	Polychlorinated biphenyls	1336-36-3
		Aroclor	12767-79-2
		Chlorodiphenyl (Aroclor 1260)	11096-82-5
		Kanechlor 500	27323-18-8
		Aroclor 1254	11097-69-1
	Ozone depleting substances/ isomers (they may contain isomers that are not listed here)		

Polychlorinated biphenyls 1336-36-3
Aroclor 12767-79-2
Chlorodiphenyl (Aroclor 1260) 11096-82-5
Kanechlor 500 27323-18-8
Aroclor 1254 11097-69-1
Ozone depleting
substances/
isomers (they may
contain isomers
that are not listed
here)
Trichlorofluoromethane (CFC11) 75-69-4
Dichlorodifluoromethane (CFC12) 75-71-8
Chlorotrifluoromethane (CFC 13) 75-72-9
Pentachlorofluoroethane (CFC 111) 354-56-3
Tetrachlorodifluoroethane (CFC 112) 76-12-0
Trichlorotrifluoroethane (CFC 113) 354-58-5
1,1,2 Trichloro-1,2,2 trifluoroethane 76-13-1
Dichlorotetrafluoroethane (CFC 114) 76-14-2
Monochloropentafluoroethane (CFC 115) 76-15-3
Heptachlorofluoropropane (CFC 211) 422-78-6 135401-87-5
Hexachlorodifluoropropane (CFC 212) 3182-26-1
Pentachlorotrifluoropropane (CFC 213) 2354-06-5 134237-31-3
Tetrachlorotetrafluoropropane (CFC 214)
1,1,1,3-Tetrachlorotetrafluoropropane
29255-31-0
2268-46-4
Trichloropentafluoropropane (CFC 215)
1,1,1-Trichloropentafluoropropane
1,2,3-Trichloropentafluoropropane
1599-41-3
4259-43-2
76-17-5
Dichlorohexafluoropropane (CFC 216) 661-97-2
Monochloroheptafluoropropane (CFC 217) 422-86-6
Bromochlorodifluoromethane (Halon 1211) 353-59-3

1,1,1-Trichloropentafluoropropane
1,2,3-Trichloropentafluoropropane
1599-41-3
4259-43-2
76-17-5
Dichlorohexafluoropropane (CFC 216) 661-97-2
Monochloroheptafluoropropane (CFC 217) 422-86-6
Bromochlorodifluoromethane (Halon 1211) 353-59-3
Bromotrifluoromethane (Halon 1301) 75-63-8
Dibromotetrafluoroethane (Halon 2402) 124-73-2
Carbon tetrachloride (Tetrachloromethane) 56-23-5
1,1,1, - Trichloroethane (methyl chloroform) and its
isomers except 1,1,2-trichloroethane 71-55-6
Bromomethane (Methyl bromide) 74-83-9
Bromodifluoromethane and isomers (HBFC's) 1511-62-2
Dichlorofluoromethane (HCFC 21) 75-43-4
Chlorodifluoromethane (HCFC 22) 75-45-6
Chlorofluoromethane (HCFC 31) 593-70-4
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 49

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Table Material Category Substances CAS Numbers
Tetrachlorofluoroethane (121) HCFC
1,1,1,2-tetrachloro-2-fluoroethane (HCFC 121a)
1,1,2,2-tetracloro-1-fluoroethane
134237-32-4
354-11-0
354-14-3
Trichlorodifluoroethane (HCFC 122)

Table Material Category Substances CAS Numbers
Tetrachlorofluoroethane (121) HCFC
1,1,1,2-tetrachloro-2-fluoroethane (HCFC 121a)
1,1,2,2-tetracloro-1-fluoroethane
134237-32-4
354-11-0
354-14-3
Trichlorodifluoroethane (HCFC 122)
1,2,2-trichloro-1,1-difluoroethane
41834-16-6
354-21-2
Dichlorotrifluoroethane(HCFC 123)
Dichloro-1,1,2-trifluoroethane
2,2-dichloro-1,1,1-trifluroethane
1,2-dichloro-1,1,2-trifluroethane (HCFC-123a)
1,1-dichloro-1,2,2-trifluroethane (HCFC-123b)
2,2-dichloro-1,1,2-trifluroethane (HCFC-123b)
34077-87-7
90454-18-5
306-83-2
354-23-4
812-04-4
812-04-4
Chlorotetrafluoroethane (HCFC 124)
2-chloro-1,1,1,2-tetrafluoroethane
1-chloro-1,1,2,2-tetrafluoroethane (HCFC 124a)
63938-10-3
2837-89-0
354-25-6
Trichlorofluoroethane (HCFC 131)

1-Fluoro-1,2,2-trichloroethane
1,1,1-trichloro-2-fluoroethane (HCFC131b)
27154-33-2;
(134237-34-6)
359-28-4
811-95-0
Dichlorodifluoroethane (HCFC 132)
1,2-dichloro-1,1-difluoroethane (HCFC 132b)
1,1-dichloro-1,2-difluoroethane (HFCF 132c)
1,1-dichloro-2,2-difluoroethane
1,2-dichloro-1,2-difluoroethane
25915-78-0
1649-08-7
1842-05-3
471-43-2
431-06-1
Chlorotrifluoroethane (HCFC 133)

1,2-dichloro-1,1-difluoroethane (HCFC 132b)
1,1-dichloro-1,2-difluoroethane (HFCF 132c)
1,1-dichloro-2,2-difluoroethane
1,2-dichloro-1,2-difluoroethane
25915-78-0
1649-08-7
1842-05-3
471-43-2
431-06-1
Chlorotrifluoroethane (HCFC 133)
1-chloro-1,2,2-trifluoroethane
2-chloro-1,1,1-trifluoroethane (HCFC-133a)
1330-45-6
1330-45-6
75-88-7
Dichlorofluoroethane(HCFC 141)
1,1-dichloro-1-fluoroethane (HCFC-141b)
1,2-dichloro-1-fluoroethane
1717-00-6; (25167-88-8)
1717-00-6
430-57-9
Chlorodifluoroethane (HCFC 142)
1-chloro-1,1-difluoroethane (HCFC142b)
1-chloro-1,2-difluoroethane (HCFC142a)
25497-29-4
75-68-3
25497-29-4
Hexachlorofluoropropane (HCFC 221) 134237-35-7
Pentachlorodifluoropropane (HCFC 222) 134237-36-8
Tetrachlorotrifluropropane (HCFC 223) 134237-37-9
Trichlorotetrafluoropropane (HCFC 224) 134237-38-0
Dichloropentafluoropropane, (Ethyne, fluoro-) (HCFC 225) 127564-92-5; (2713-09-9)
2,2-Dichloro-1,1,1,3,3-pentafluoropropane(HCFC 225aa) 128903-21-9
2,3-Dichloro-1,1,1,2,3-pentafluoropropane (HCFC 225ba) 422-48-0
1,2-Dichloro-1,1,2,3,3-pentafluoropropane (HCFC 225bb) 422-44-6
3,3-Dichloro-1,1,1,2,2-pentafluoropropane (HCFC 225ca) 422-56-0

2,3-Dichloro-1,1,1,2,3-pentafluoropropane (HCFC 225ba) 422-48-0
1,2-Dichloro-1,1,2,3,3-pentafluoropropane (HCFC 225bb) 422-44-6
3,3-Dichloro-1,1,1,2,2-pentafluoropropane (HCFC 225ca) 422-56-0
1,3-Dichloro-1,1,2,2,3-pentafluoropropane (HCFC 225cb) 507-55-1
1,1-Dichloro-1,2,2,3,3-pentafluoropropane(HCFC 225cc) 13474-88-9
1,2-Dichloro-1,1,3,3,3-pentafluoropropane (HCFC 225da) 431-86-7
1,3-Dichloro-1,1,2,3,3-pentafluoropropane (HCFC 225ea) 136013-79-1
1,1-Dichloro-1,2,3,3,3-pentafluoropropane(HCFC 225eb) 111512-56-2
Chlorohexafluoropropane (HCFC 226) 134308-72-8
Pentachlorofluoropropane (HCFC 231) 134190-48-0
Tetrachlorodifluoropropane (HCFC 232) 134237-39-1
Trichlorotrifluoropropane (HCFC 233) 134237-40-4
1,1,1-Trichloro-3,3,3-trifluoropropane 7125-83-9
Dichlorotetrafluoropropane (HCFC 234) 127564-83-4
Chloropentafluoropropane (HCFC 235) 134237-41-5
1-Chloro-1,1,3,3,3-pentafluoropropane 460-92-4
Tetrachlorofluoropropane (HCFC 241) 134190-49-1
Trichlorodifluoropropane (HCFC 242) 134237-42-6
Dichlorotrifluoropropane (HCFC 243)
1,1-dichloro-1,2,2-trifluoropropane
2,3-dichloro-1,1,1-trifluoropropane
3,3-Dichloro-1,1,1-trifluoropropane
134237-43-7
7125-99-7

Trichlorodifluoropropane (HCFC 242) 134237-42-6
Dichlorotrifluoropropane (HCFC 243)
1,1-dichloro-1,2,2-trifluoropropane
2,3-dichloro-1,1,1-trifluoropropane
3,3-Dichloro-1,1,1-trifluoropropane
134237-43-7
7125-99-7
338-75-0
460-69-5
Chlorotetrafluoropropane (HCFC 244) 134190-50-4
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 50

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Table Material Category Substances CAS Numbers
3-chloro-1,1,2,2-tetrafluoropropane 679-85-6
Trichlorofluoropropane (HCFC 251) 134190-51-5
1,1,3-trichloro-1-fluoropropane 818-99-5
Dichlorodifluoropropane (HCFC 252) 134190-52-6
Chlorotrifluoropropane (HCFC 253) 134237-44-8
3-chloro-1,1,1-trifluoropropane (HCFC 253fb) 460-35-5
Dichlorofluoropropane (HCFC 261) 134237-45-9
1,1-dichloro-1-fluoropropane 7799-56-6
Chlorodifluoropropane (HCFC 262) 134190-53-7
2-chloro-1,3-difluoropropane 102738-79-4
Chlorofluoropropane (HCFC 271) 134190-54-8
2-chloro-2-fluoropropane 420-44-0
Organotin
compounds
(tributyl tin,
triphenyl tin,
tributyl tin oxide)

Chlorodifluoropropane (HCFC 262) 134190-53-7
2-chloro-1,3-difluoropropane 102738-79-4
Chlorofluoropropane (HCFC 271) 134190-54-8
2-chloro-2-fluoropropane 420-44-0
Organotin
compounds
(tributyl tin,
triphenyl tin,
tributyl tin oxide)
Bis(tri-n-butyltin) oxide 56-35-9
Triphenyltin N,N'-dimethyldithiocarbamate 1803-12-9
Triphenyltin fluoride 379-52-2
Triphenyltin acetate 900-95-8
Triphenyltin chloride 639-58-7
Triphenyltin hydroxide 76-87-9
Triphenyltin fatty acid salts (C=9-11) 47672-31-1
Triphenyltin chloroacetate 7094-94-2
Tributyltin methacrylate 2155-70-6
Bis(tributyltin) fumarate 6454-35-9
Tributyltin fluoride 1983-10-4
Bis(tributyltin) 2,3-dibromosuccinate 31732-71-5
Tributyltin acetate 56-36-0
Tributyltin laurate 3090-36-6
Bis(tributyltin) phthalate 4782-29-0
Copolymer of alkyl acrylate, methyl methacrylate and
tributyltin methacrylate(alkyl; C=8) -
Tributyltin sulfamate 6517-25-5
Bis(tributyltin) maleate 14275-57-1
Tributyltin chloride 1461-22-9
Mixture of tributyltin cyclopentanecarboxylate and its
analogs (Tributyltin naphthenate) -
Mixture of tributyltin 1,2,3,4,4a, 4b, 5,6,10,10adecahydro-

Bis(tributyltin) maleate 14275-57-1
Tributyltin chloride 1461-22-9
Mixture of tributyltin cyclopentanecarboxylate and its analogs (Tributyltin naphthenate) -
Mixture of tributyltin 1,2,3,4,4a, 4b, 5,6,10,10adecahydro-7-isopropyl-1, 4a-dimethyl-1-phenanthlenecarboxylate and its analogs (Tributyltin rosin salt) -
Other tributyl tins & triphenyl tins -
Table B (Materials listed in appendix 2 of the Convention)
Cadmium/ cadmium compounds
Cadmium 7440-43-9
Cadmium oxide 1306-19-0
Cadmium sulfide 1306-23-6
Cadmium chloride 10108-64-2
Cadmium sulfate 10124-36-4
Other cadmium compounds -
Chromium VI compounds
Chromium (VI) oxide 1333-82-0
Barium chromate 10294-40-3
Calcium chromate 13765-19-0
Chromium trioxide 1333-82-0
Lead (II) chromate 7758-97-6
Sodium chromate 7775-11-3
Sodium dichromate 10588-01-9
Strontium chromate 7789-06-2
Potassium dichromate 7778-50-9
Potassium chromate 7789-00-6
Zinc chromate 13530-65-9
Other hexavalent chromium compounds -
Lead/lead compounds
Lead 7439-92-1
Lead (II) sulfate 7446-14-2
Lead (II) carbonate 598-63-0

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE

Other hexavalent chromium compounds -
Lead/lead
compounds
Lead 7439-92-1
Lead (II) sulfate 7446-14-2
Lead (II) carbonate 598-63-0
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 51

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Table Material Category Substances CAS Numbers
Lead hydrocarbonate 1319-46-6
Lead acetate 301-04-2
Lead (II) acetate, trihydrate 6080-56-4
Lead phosphate 7446-27-7
Lead selenide 12069-00-0
Lead (IV) oxide 1309-60-0
Lead (II,IV) oxide 1314-41-6
Lead (II) sulfide 1314-87-0
Lead (II) oxide 1317-36-8
Lead (II) carbonate basic 1319-46-6
Lead hydroxidcarbonate 1344-36-1
Lead (II) phosphate 7446-27-7
Lead (II) chromate 7758-97-6
Lead (II) titanate 12060-00-3
Lead sulfate, sulphuric acid, lead salt 15739-80-7
Lead sulphate, tribasic 12202-17-4
Lead stearate 1072-35-1
Other lead compounds -
Mercury/
mercury
compounds
Mercury 7439-97-6
Mercuric chloride 33631-63-9
Mercury (II) chloride 7487-94-7
Mercuric sulfate 7783-35-9
Mercuric nitrate 10045-94-0
Mercuric (II) oxide 21908-53-2

Lead stearate 1072-35-1
Other lead compounds -
Mercury/
mercury
compounds
Mercury 7439-97-6
Mercuric chloride 33631-63-9
Mercury (II) chloride 7487-94-7
Mercuric sulfate 7783-35-9
Mercuric nitrate 10045-94-0
Mercuric (II) oxide 21908-53-2
Mercuric sulfide 1344-48-5
Other mercury compounds -
Polybrominated
biphenyls (PBBs)
and
polybrominated
diphenyl ethers
(PBDEs)
Bromobiphenyl and its ethers
2052-07-5
(2-Bromobiphenyl)
2113-57-7
(3-Bromobiphenyl
92-66-0
(4-Bromobiphenyl)
101-55-3 (ether)
Decabromobiphenyl and its ethers 13654-09-6 1163-19-5 (ether)
Dibromobiphenyl and its ethers 92-86-4 2050-47-7 (ether)
Heptabromobiphenylether 68928-80-3
Hexabromobiphenyl and its ethers
59080-40-9
36355-01-8 (hexabromo-
1,1'-biphenyl)
67774-32-7
(Firemaster FF-1)
36483-60-0 (ether)
Nonabromobiphenylether 63936-56-1
Octabromobiphenyl and its ethers 61288-13-9 32536-52-0 (ether)
Pentabromobidphenyl ether (note: commercially available
PeBDPO is a complex reaction mixture containing a
variety of brominated diphenyloxides.
32534-81-9 (CAS number
used for commercial
grades of PeBDPO)
Polybrominated biphenyls 59536-65-1

Pentabromobidphenyl ether (note: commercially available
PeBDPO is a complex reaction mixture containing a
variety of brominated diphenyloxides.
32534-81-9 (CAS number
used for commercial
grades of PeBDPO)
Polybrominated biphenyls 59536-65-1
Tetrabromobiphenyl and its ethers 40088-45-7 40088-47-9 (ether)
Tribromobiphenyl ether 49690-94-0
Polychlorinated
naphthalenes
Polychlorinated naphthalenes 70776-03-3
Other polychlorinated naphthalenes -
Radioactive
substances
Uranium -
Plutonium -
Radon -
Americium -
Thorium -
Cesium 7440-46-2
Strontium 7440-24-6
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 52

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Table Material Category Substances CAS Numbers
Other radioactive substances -
Certain shortchain
chlorinated
paraffins (with
carbon length of
10-13 atoms)
Chlorinated paraffins (C10-13) 85535-84-8
Other short chain chlorinated paraffins -

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE

chlorinated
paraffins (with
carbon length of
10-13 atoms)
Chlorinated paraffins (C10-13) 85535-84-8
Other short chain chlorinated paraffins -

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 53

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
APPENDIX 9

SPECIFIC TEST METHODS

1 Asbestos

Types to test for : as per resolution MEPC.179(59); Actinolite CAS 77536- 66-4 Amosite (Grunerite) CAS 12172- 73-5 Anthophyllite CAS 77536- 67-5 Chrysotile CAS 12001- 29-5 Crocidolite CAS 12001-28-4 Asbestos Tremolite CAS 77536-68-6.

Specific testing techniques : Polarized Light Microscopy (PLM), electron microscope techniques and/or X-Ray Diffraction (XRD) as applicable.

Specific reporting information : The presence/no presence of asbestos, indicate the concentration range, and state the type when necessary.

Notes: .1 The suggested three kinds of testing techniques are most commonly used methods when analysing asbestos and each of them has its limitation.
Laboratories should choose the most suitable methods to determine, and in

Notes: .1 The suggested three kinds of testing techniques are most commonly used methods when analysing asbestos and each of them has its limitation. Laboratories should choose the most suitable methods to determine, and in most cases, two or more techniques should be utilized together.

.2 The quantification of asbestos is difficult at this stage, although the XRD technique is applicable. Only a few laboratories conduct the quantification rather than the qualification, especially when a precise number is required. Considering the demand from the operators and ship recycling parties, the precise concentration is not strictly required. Thereby, the concentration range is recommended to report, and the recommended range division according to standard VDI 3866 is as follows:

Asbestos not detected
Traces of asbestos detected
Asbestos content approx. 1% to 15% by mass
Asbestos content approx. 15% to 40% by mass
Asbestos content greater than 40% by mass

Results that specified more precisely must be provided with a reasoned statement on the uncertainty.

.3 As to the asbestos types, to distinguish all six different types is time

Asbestos content greater than 40% by mass

Results that specified more precisely must be provided with a reasoned statement on the uncertainty.

.3 As to the asbestos types, to distinguish all six different types is time consuming and in some cases not feasible by current techniques; while on the practical side, the treatment of different types of asbestos is the same. Therefore, it is suggested to report the type when necessary.

2 Polychlorinated biphenyls (PCBs)

Note: There are 209 different congeners (forms) of PCB of it is impracticable to test for all. Various organizations have developed lists of PCBs to test for as indicators. In this instance two alternative approaches are recommended. Method 1 identifies the seven congeners used by the International Council for the Exploration of the Sea (ICES). Method 2 identifies 19 congeners and seven types of aroclor (PCB mixtures commonly found in solid shipboard materials containing PCBs). Laboratories should be familiar with the requirements and consequences for each of these lists.

Types to test for : Method 1: ICES7 congeners (28, 52, 101, 118, 138, 153, 180).

shipboard materials containing PCBs). Laboratories should be familiar with the requirements and consequences for each of these lists.

Types to test for : Method 1: ICES7 congeners (28, 52, 101, 118, 138, 153, 180).
Method 2: 19 congeners and seven types of aroclor, using the US EPA 8082a test.

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 54

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
Specific testing technique : GC-MS (congener specific) or GC-ECD or GC-ELCD for applicable mixtures such as aroclors. Note: standard samples must be used for each type.

Sample Preparation : It is important to properly prepare PCB samples prior to testing. For solid materials (cables, rubber, paint, etc.), it is especially critical to select the proper extraction procedure in order to release PCBs since they are chemically bound within the product.

Specific reporting information : PCB congener, ppm per congener in sample, and for Method 2, ppm per aroclor in sample should also be reported.

Notes:

product.

Specific reporting information : PCB congener, ppm per congener in sample, and for Method 2, ppm per aroclor in sample should also be reported.

Notes:
.1 Certain field or indicator tests are suitable for detecting PCBs in liquids or surfaces. However, there are currently no such tests that can accurately identify PCBs in solid shipboard materials. It is also noted that many of these tests rely on the identification of free chlorine ions and are thus highly susceptible to chlorine contamination and false readings in a marine environment where all surfaces are highly contaminated with chlorine ions from the sea water and atmosphere.

.2 Several congeners are tested for as "indicator" congeners. They are used because their presence often indicates the likelihood of other congeners in greater quantities (many PCBs are mixes, many mixes use a limited number of PCBs in small quantities, therefore the presence of these small quantities indicates the potential for a mix containing far higher quantities of other PCBs).

.3 Many reports refer to "total PCB", which is often a scaled figure to

number of PCBs in small quantities, therefore the presence of these small quantities indicates the potential for a mix containing far higher quantities of other PCBs).

.3 Many reports refer to "total PCB", which is often a scaled figure to represent likely total PCBs based on the sample and the common ratios of PCB mixes. Where this is done the exact scaling technique must be stated, and is for information only and does not form part of the specific technique.

3 Ozone depleting substances

Types to test for: as per appendix 8 of these guidelines all the listed CFCs, Halons, HCFCs and other listed substance as required by Montreal Protocol.

Specific testing technique : Gas Chromatography-Mass Spectrometry (GC-MS), coupled Electron Capture Detectors (GC-ECD) and Electrolytic Conductivity Detectors (GC-ELCD).

Specific reporting information: Type and concentration of ODS.

4 Anti-fouling systems containing organotin compounds as a biocide

Types to test for : Anti-fouling compounds and systems regulated under annex I to the International Convention on the Control of Harmful Anti-fouling Systems on Ships, 2001

SOURCE: MEPC.269(68).pdf | Page 221

4 Anti-fouling systems containing organotin compounds as a biocide

Types to test for : Anti-fouling compounds and systems regulated under annex I to the International Convention on the Control of Harmful Anti-fouling Systems on Ships, 2001 (AFS Convention), including: tributyl tins (TBT), triphenyl tins (TPT) and tributyl tin oxide (TBTO).

Specific testing technique: As per resolution MEPC.104(49) (Guidelines for Brief Sampling of Anti-Fouling Systems on Ships), adopted 18 July 2003, using ICPOES, ICP, AAS, XRF, GC-MS as applicable.
Specific reporting information: Type and concentration of organotin compound.

Note: For "field" or "indicative" testing it may be acceptable to simply identify presence of tin, due to the expected good documentation on anti-fouling systems.
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALSMEPC 68/21/Add.1
Annex 17, page 55

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
APPENDIX 10

EXAMPLES OF RADIOACTIVE SOURCES

The following list contains examples of radioactive sources that should be included in the

https://edocs.imo.org/Final Documents/English/MEPC 68-21-ADD.1 (E).doc
APPENDIX 10

EXAMPLES OF RADIOACTIVE SOURCES

The following list contains examples of radioactive sources that should be included in the Inventory, regardless of the number, the amount of radioactivity or the type of radionuclide.

Examples of consumer products with radioactive materials

Ionization chamber smoke detectors (typical radionuclides 241Am; 226Ra)
Instruments/signs containing gaseous tritium light sources (3H)
Instruments/signs containing radioactive painting (typical radionuclide 226Ra)
High intensity discharge lamps (typical radionuclides 85Kr; 232Th)
Radioactive lighting rods (typical radionuclides 241Am; 226Ra)

Examples of industrial gauges with radioactive materials

Radioactive level gauges
Radioactive dredger gauges19
Radioactive conveyor gauges56
Radioactive spinning pipe gauges56

***

19 Typical radionuclides: 241Am; 241Am/Be; 252Cf; 244Cm; 60Co; 137Cs; 153Gd; 192Ir; 147Pm; 238Pu; 239Pu/Be; 226Ra; 75S; 90Sr (90Y); 170Tm; 169Yb
RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)

19 Typical radionuclides: 241Am; 241Am/Be; 252Cf; 244Cm; 60Co; 137Cs; 153Gd; 192Ir; 147Pm; 238Pu; 239Pu/Be; 226Ra; 75S; 90Sr (90Y); 170Tm; 169Yb

RESOLUTION MEPC.269(68)
(adopted on 15 May 2015)
2015 GUIDELINES FOR THE DEVELOPMENT OF THE
INVENTORY OF HAZARDOUS MATERIALS