BL Series

The BEAST™ (Gen 3)

Industrial LED Low Bay / High Bay

Ideal Optics / 90+ CRI



+65°C

the BEAST

TAA COMPLIANT

SOLAS RAY™ LIGHTING

5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

Cat. #	Type
Notes	

CERTIFICATIONS / RATINGS

CERTIFIED UL 1598 **IP66** CSA C22.2 No. 250.0 NSF

KEY FEATURES AND BENEFITS

- Industrial LED low bay / high bay with advanced optics and superior color rendering.
- Precise optical lens to deliver optimal light output without the discomfort of glare.
- Superior passive cooling engineered for high temperature applications up to 65°C.
- Angle mounted LEDs deliver light distribution similar to traditional HID lamps.
- Wide angle polycarbonate evenly distributes light in all directions +10% up-lighting.
- 90+ CRI / 90+ Ra / 85+ R9 for accurate color and more natural illumination.
- 1-10V dimming driver standard (specify DWA when ordering).
- Flat tempered glass lens option is available.
- Built-in 6kV DM (differential mode) and 10kV CM (common mode) surge protection.
- Aluminum housing with epoxy-polyester hybrid powder coat finish.
- NSF certified - NSF/ANSI 2 - Food Equipment - Splash Zone and Non-Food Zone.*
- 10ft (600V / 105°C) power cord included.
- Trade Agreement Act compliant.

SPECIFICATIONS

Voltage	120-277VAC / 277-480VAC
Wattage	49W / 104W / 144W / 175W / 219W / 260W / 328W / 384W
Color Temp	5000 (Standard) / 4000 Kelvin
Housing	Die-cast aluminum
Color	White
Coating	Epoxy-Polyester Hybrid Powder Coat
Lens	UV-resistant polycarbonate (standard) Flat tempered glass (optional)

Ambient Temperature	-40°C (-40°F) to 65°C (149°F)
Hardware	S304 stainless steel end caps
Lifetime	100,000 hrs L_{70}
CRI	90+
Power Factor	> 0.95
Protection	IP66
Warranty	5 Year Limited Warranty

LUMENS (5000K)

49W (BL06)	104W (BL12)	144W (BL18)	175W (BL22)	219W (BL27)	260W (BL32)	328W (BL40)	384W (BL50)
5,900 lm	12,500 lm	17,400 lm	21,200 lm	26,400 lm	32,700 lm	40,400 lm	46,700 lm

PRODUCT ORDERING SELECTION

[ ] – [ ] – [EX] – [ ] – [WT] – [ ] – [ ]

Series/Watts
- ☐ BL06-049 (**49W**)
- ☐ BL12-104 (**104W**)
- ☐ BL18-144 (**144W**)
- ☐ BL22-175 (**175W**)
- ☐ BL27-219 (**219W**)
- ☐ BL32-260 (**260W**)
- ☐ BL40-328 (**328W**)
- ☐ BL50-384 (**384W**)

Kelvin
- ☐ 50 - 5000K (standard)
- ☐ 40 - 4000K

Driver
- ☑ EX - External

Voltage
- ☐ U - 120-277VAC
- ☐ 48 - 277-480VAC

Color
- ☑ WT - White

Mounting Options *
- ☐ UB - Universal Bracket (NSF)
- ☐ PM3 - Pendant Mount 3”
- ☐ PM6 - Pendant Mount 6”
- ☐ PM12 - Pendant Mount 12”
- ☐ PM18 - Pendant Mount 18”
- ☐ PM24 - Pendant Mount 24”
- ☐ PHS - Mounting Hook
- ☐ WMB - Wall Mount Bracket
- ☐ CRMB - Crane Mount Bracket

Other Options **
- ☐ GL - Flat Tempered Glass Lens
- ☐ HDM - Medium Reflective Hood
- ☐ MS - Motion Sensor
- ☐ WGHB - Wire Guard
- ☐ DWA - Dimming Wire Access
- ☐ EM-90 - Battery Backup (For 120-277VAC Models Only)

* UB Universal Bracket is the only mounting approved for NSF applications.
** Options listed under “Other Options” are not NSF approved.


Specifications and data are subject to change without notice.

BL Series

The BEAST™ (Gen 3)

SOLAS RAY™ LIGHTING
5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

Effective Illumination Where It Matters Most

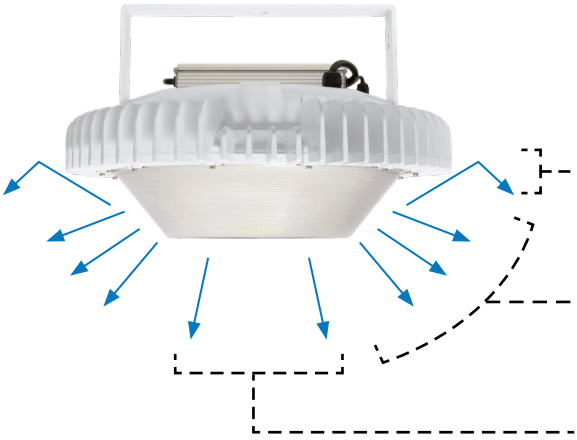


The Beast™ features internal LED arrays mounted at precise angles and a highly engineered efficient optical polycarbonate drop lens to produce the most effective light pattern for low/high bay applications. The strength of The Beast™ comes from it's superior, uniform, low glare distribution pattern.

10% Uplight Illuminates the ceiling eliminating the "cave effect" and providing bounced light for an even wider distribution area.

Wide Angle The majority of the light output is directed at a wide angle to illuminate objects evenly in every direction and at varying heights.


Low Glare Directly downward cast light is carefully controlled to eliminate spotlight effects and minimize glare throughout the illuminated area.

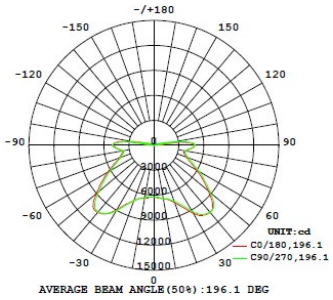

Eliminates Cave Effect

Cave effect refers to the darkened and claustrophobic atmosphere resulting from overhead lights that direct all of their light downward. The area will feel generally darker and less inviting with poor illumination at higher heights.

The Beast™ solves this issue with its unique design allowing a controlled amount of light to illuminate the ceiling and objects at higher heights. The result is a more open feeling area with better illumination at higher heights.

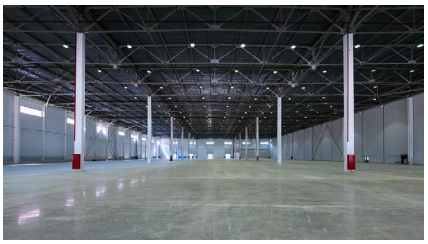

"Cave effect" resulting from a lack of up-lighting. Area is uninviting and not evenly lit throughout.



Up-lighting contributes to a more open feeling area with more even light from floor to ceiling.


Exceptionally Good Light Quality From An Industrial Low/High Bay

CRI 90+ CRI (Color Rendering Index) measures how accurately a light source renders colors compared to natural sunlight. A CRI over 90 is exceptional in high/low bay industrial lighting. We include it standard at no extra cost.

Ra 90+ Refers to the average CRI value across eight standard test colors (R1-R8). A value over 90 reflects excellent general color fidelity suitable for most applications.

R9 85+ Measures the ability to accurately render saturated reds. Many lights with a high Ra rating can still have poor R9 performance but not The Beast™. An R9 value of 85+, means the Beast™ meets standards normally reserved for medical lighting, photography and premium industrial environments.

Spectral Flux Graph

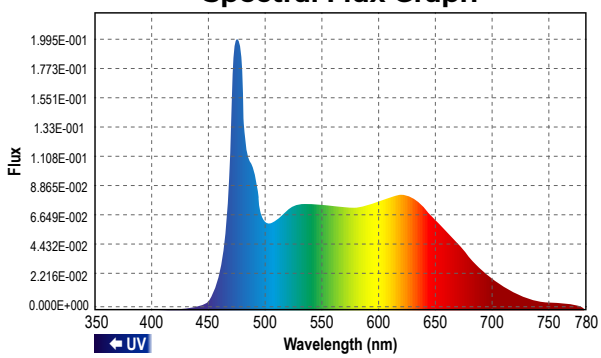



Specifications and data are subject to change without notice.



BL Series

The BEAST™ (Gen 3)

SOLAS RAY™ LIGHTING
5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

MOUNTING OPTIONS

#UB - Universal Bracket	#PM(X) - Pendant Mount	#PHS - Mounting Hook
Included standard. 	3" / 6" / 12" / 18" / 24" Lengths Available 	

#WMB - Wall Mount Bracket	#CRMB - Crane Mount Bracket
	


OTHER OPTIONS


#HDM - Medium Reflective Hood	#WGHB - Wire Guard	#MS - Motion Sensor	#EM-90 - Battery Backup
			 3" / 6" / 12" / 18" / 24" Lengths Available

WEIGHTS AND DIMENSIONS

WEIGHTS

BL06	24 lb
BL12	24.5 lb
BL18	25 lb
BL22	25 lb
BL27	25 lb
BL32	26 lb
BL40	27 lb
BL50	28 lb

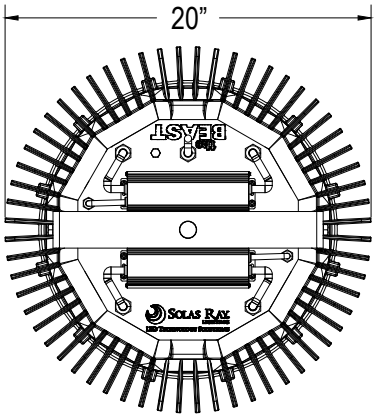

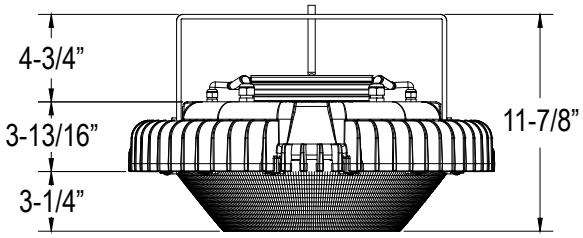

Specifications and data are subject to change without notice.