HJHL Series

The FLYER™

Hazardous Location LED Lighting

SOLAS RAY™ LIGHTING
5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

Cat. #	Type
Notes	

Haz Loc HAZARDOUS LOCATION



Available in 4' and 2' lengths.



High Vibration RESISTANCE

CERTIFICATIONS / RATINGS

ETL LISTED · UL844 · IP66 · CERTIFIED UL 1598 · MARINE UL 1598 A · DLC LISTED * · ABS energy API · IEC · IECEx · Ex

CLASS / DIVISION

- Class I, Div 2, Groups A, B, C, D
- Class II, Div 2, Groups F, G
- Class II, Div 1, Groups E, F, G
- Class III

KEY FEATURES AND BENEFITS

- -40°C to 60°C (140°F) ambient temperature capabilities.
- * DLC V5.1 Standard (4000K/5000K with 120° beam angle only)
- Internal EM battery option (15W / 90 min).
- Heavy-duty design with high impact resistance.
- Corrosion proof - coated copper free aluminum housing.
- Marine rated gray powder coated finish.
- Stainless steel hardware and mounting bracket.

SPECIFICATIONS

Voltage	120-277 VAC / 200-480 VAC
Wattage	20W / 40W / 60W / 80W
Color Temp	4000 / 5000 Kelvin
Ambient Temperature	-40°C (-40°F) to 60°C (140°F) (-10°C to 60°C with EM Battery)
T-Rating	T3
Housing	Coated copper free aircraft aluminum
Color	Gray
Lens	Tempered glass with polycarbonate lens
Lifetime	70,000 hrs L_{70}

CRI	80
Beam Angles	120° x 120°
Efficacy	up to 140 lm/W
Protection	IP66
Entrance Thread	3/4" NPT
Warranty	5 Year Limited Warranty - Fixture 3 Year Limited Warranty - Battery

LUMENS

20W	40W	60W	80W
2,800	5,600	8,400	11,200

PRODUCT ORDERING SELECTION

[ ] – [ ] – [ ] – [ ] – [120] – [ ] – [ ]

Series/Length
- ☐ HJHL22 (2 ft)
- ☐ HJHL42 (4 ft)

Watts
- ☐ 020 - 20w
- ☐ 040 - 40w
- ☐ 040 - 40w
- ☐ 060 - 60w
- ☐ 080 - 80w

Kelvin
- ☐ 40 - 4000K
- ☐ 50 - 5000K

Voltage
- ☐ U - 120-277 VAC
- ☐ 48 - 200-480 VAC

Beam Angle
- ☑ 120 - 120°

Mounting Options
- ☐ HJUB - Universal Yoke Bracket
- ☐ HJPP - Pendant Pipe

Other Options
- ☐ EM - Emergency Battery Backup - 15W (120-277VAC models only)

Specifications and data are subject to change without notice.

HJHL Series

The FLYER™

SOLAS RAY™ LIGHTING
5935 West 84th St. | Indianapolis, IN 46278 | 1-888-391-4822 | www.SolasRay.com

MOUNTING OPTIONS

#HJUB - Universal Yoke Bracket	#HJPP - Pendant Pipe
Universal yoke bracket may be used as a ceiling mount or wall mount.	



Features +/- 90° adjustable angle.



EM BATTERY OPTION (INTERNAL)

Available for 120-277VAC models only.

Input Rating	AC 120-277V
Output Wattage	15W
Battery Capacity	2000 mAh
Battery Run-time	90 minutes
Charge Time	≥ 24 hours
Ambient Temperature	-10°C (14°F) to 60°C (140°F)
Battery Warranty	3 Year Limited Warranty


CE RoHS compliant c UL us Type HL


WEIGHTS AND DIMENSIONS


WEIGHTS

2’	4’
8.9 lb	12.2 lb


2’ MODELS




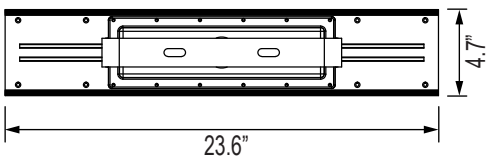


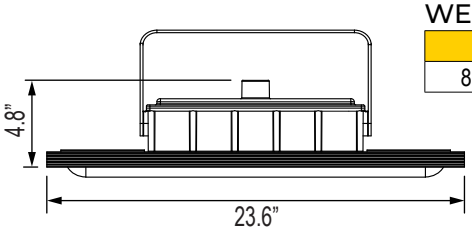

4’ MODELS



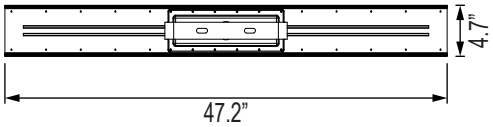

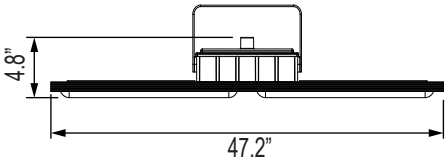

Specifications and data are subject to change without notice.