


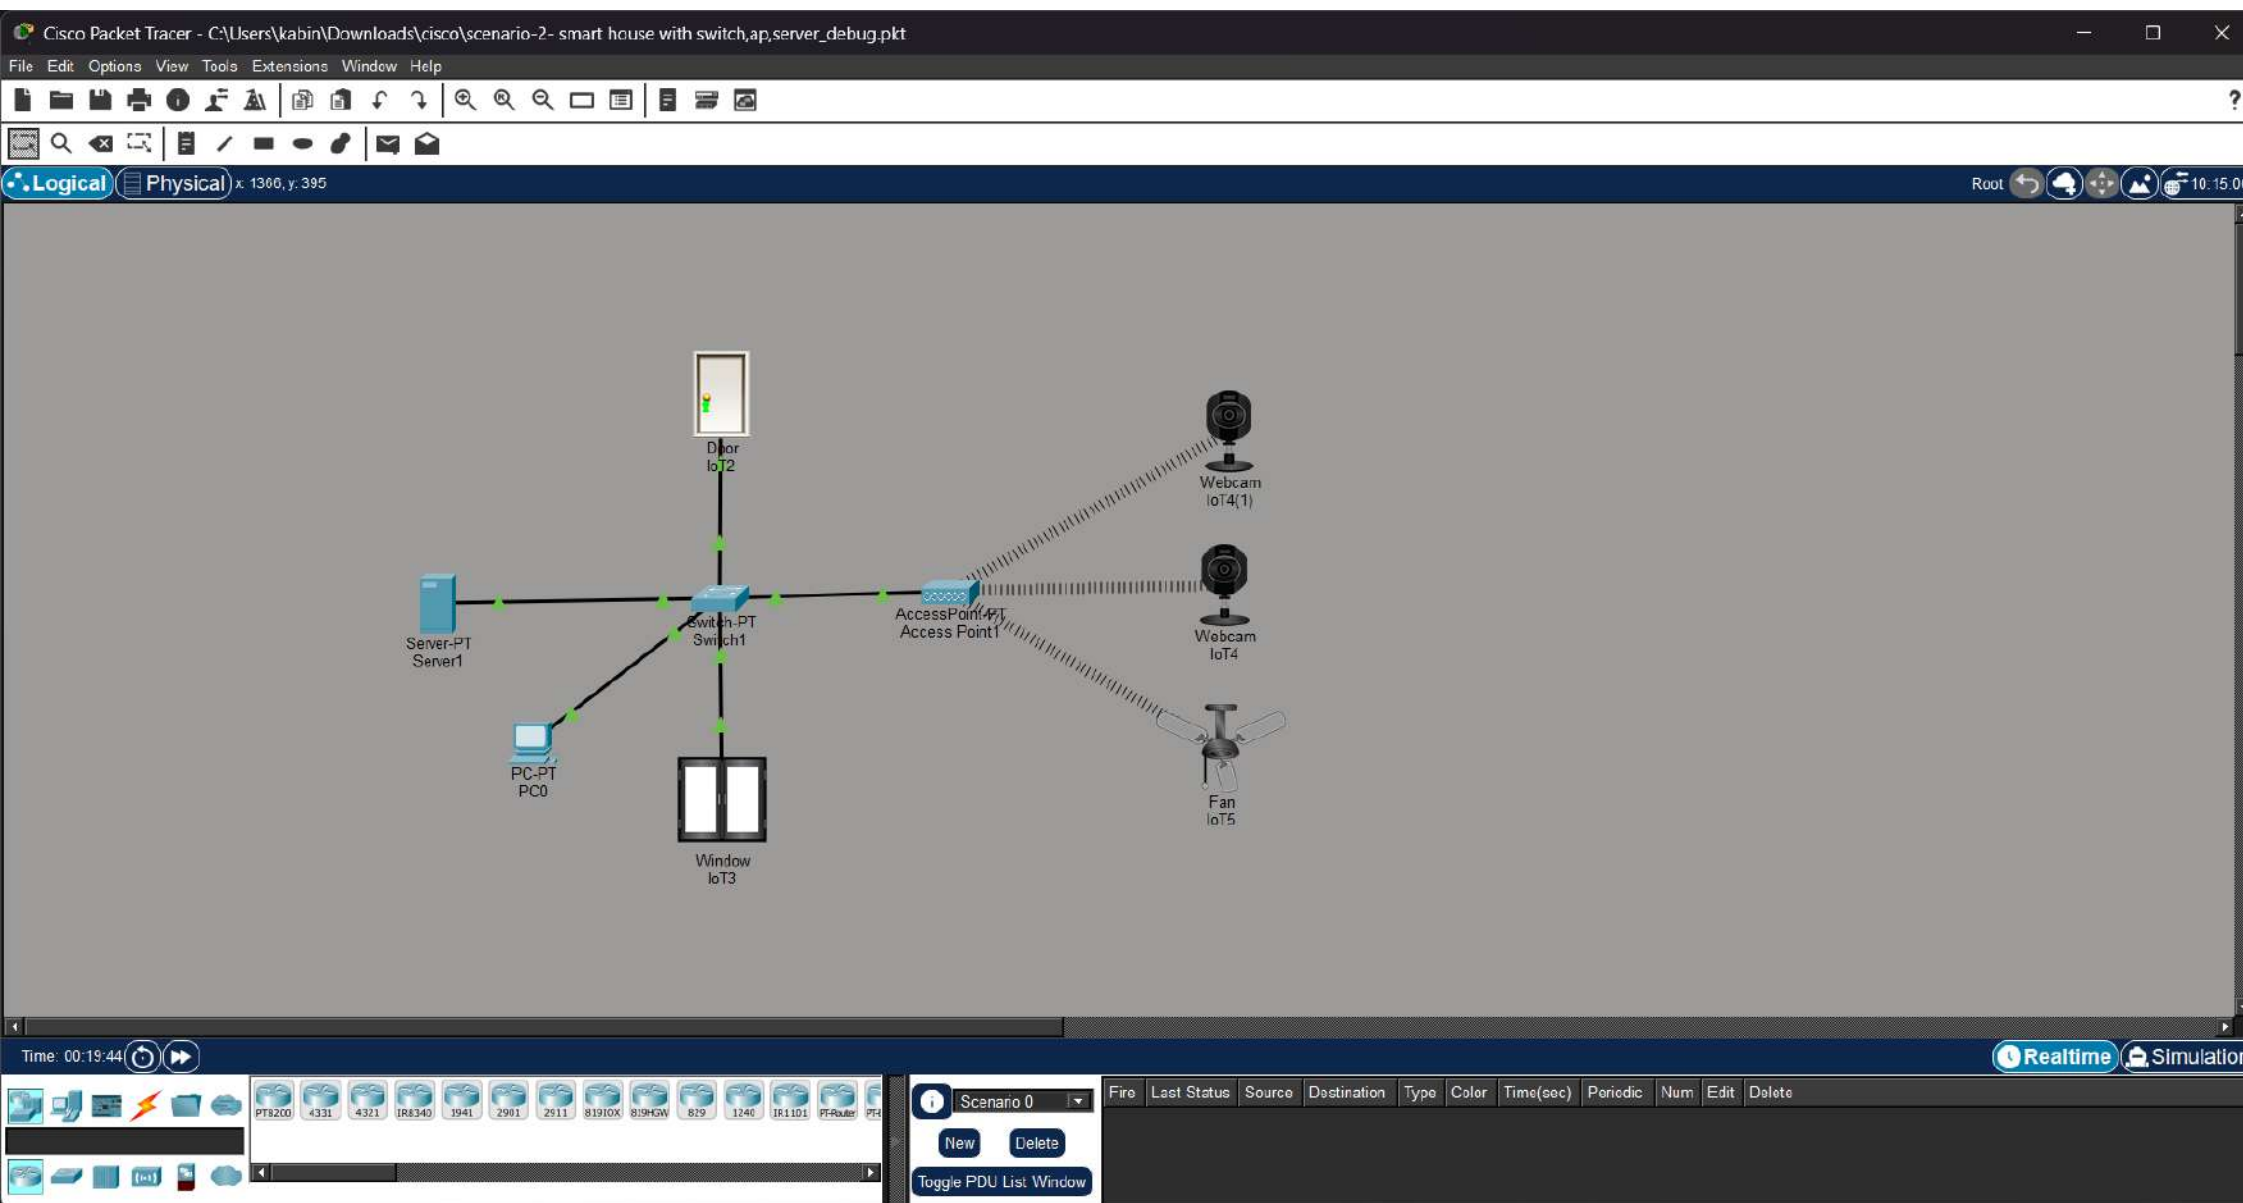

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10

Pinging 192.168.1.10 with 32 bytes of data:

Reply from 192.168.1.10: bytes=32 time=1ms TTL=255
Reply from 192.168.1.10: bytes=32 time=6ms TTL=255
Reply from 192.168.1.10: bytes=32 time=14ms TTL=255
Reply from 192.168.1.10: bytes=32 time=5ms TTL=255

Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 14ms, Average = 6ms

C:\>ping 192.168.1.12

Pinging 192.168.1.12 with 32 bytes of data:

Reply from 192.168.1.12: bytes=32 time=1ms TTL=255
Reply from 192.168.1.12: bytes=32 time<1ms TTL=255
Reply from 192.168.1.12: bytes=32 time<1ms TTL=255
Reply from 192.168.1.12: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time=7ms TTL=128

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 1ms

C:\>ping 192.168.1.16

Pinging 192.168.1.16 with 32 bytes of data:
```

Command Prompt

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 0ms, Maximum = 7ms, Average = 1ms
```

```
C:\>ping 192.168.1.16
```

```
Pinging 192.168.1.16 with 32 bytes of data:
```

```
Reply from 192.168.1.16: bytes=32 time=32ms TTL=255
Reply from 192.168.1.16: bytes=32 time=12ms TTL=255
Reply from 192.168.1.16: bytes=32 time=11ms TTL=255
Reply from 192.168.1.16: bytes=32 time=11ms TTL=255
```

```
Ping statistics for 192.168.1.16:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 11ms, Maximum = 32ms, Average = 16ms
```

```
C:\>ping 192.168.1.13
```

```
Pinging 192.168.1.13 with 32 bytes of data:
```

```
Reply from 192.168.1.13: bytes=32 time=25ms TTL=255
Reply from 192.168.1.13: bytes=32 time=13ms TTL=255
Reply from 192.168.1.13: bytes=32 time=22ms TTL=255
Reply from 192.168.1.13: bytes=32 time=9ms TTL=255
```

```
Ping statistics for 192.168.1.13:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 9ms, Maximum = 25ms, Average = 17ms
```

```
C:\>ping 192.168.1.14
```

```
Pinging 192.168.1.14 with 32 bytes of data:
```

```
Reply from 192.168.1.14: bytes=32 time=23ms TTL=255
Reply from 192.168.1.14: bytes=32 time=7ms TTL=255
Reply from 192.168.1.14: bytes=32 time=15ms TTL=255
Reply from 192.168.1.14: bytes=32 time=2ms TTL=255
```

```
Ping statistics for 192.168.1.14:
```

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 2ms, Maximum = 23ms, Average = 11ms
```

```
C:\>|
```

