

1. Draw the isometric drawings from the given orthographic views.

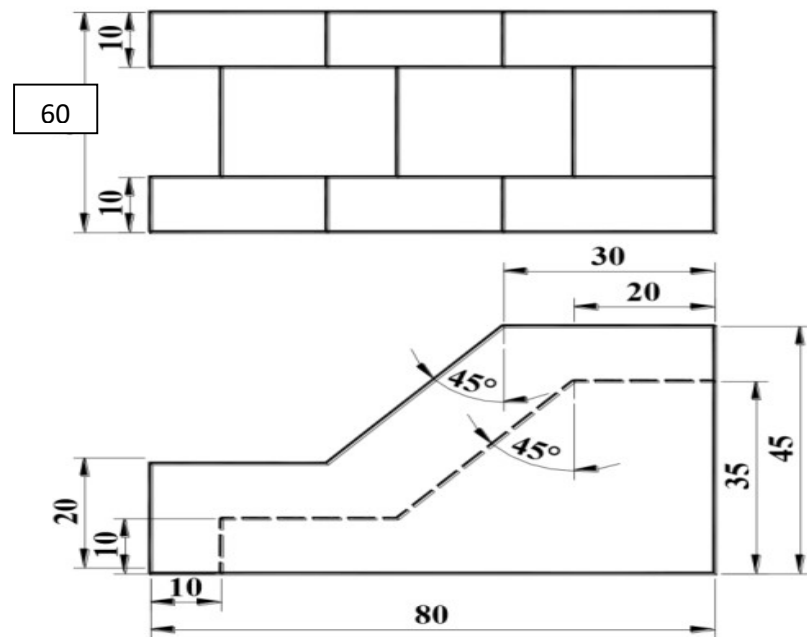


Figure: 1.1

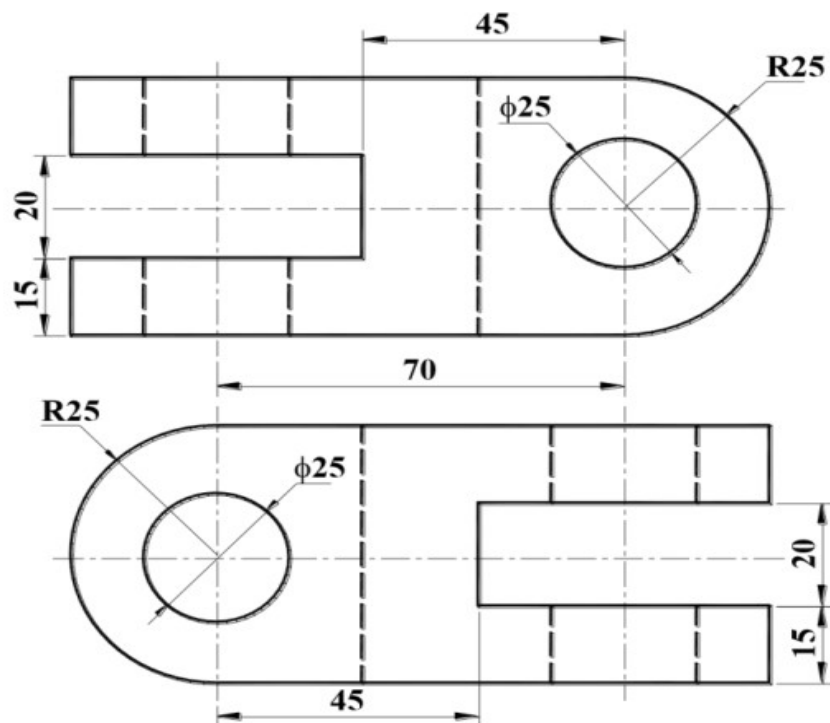


Figure: 1.2

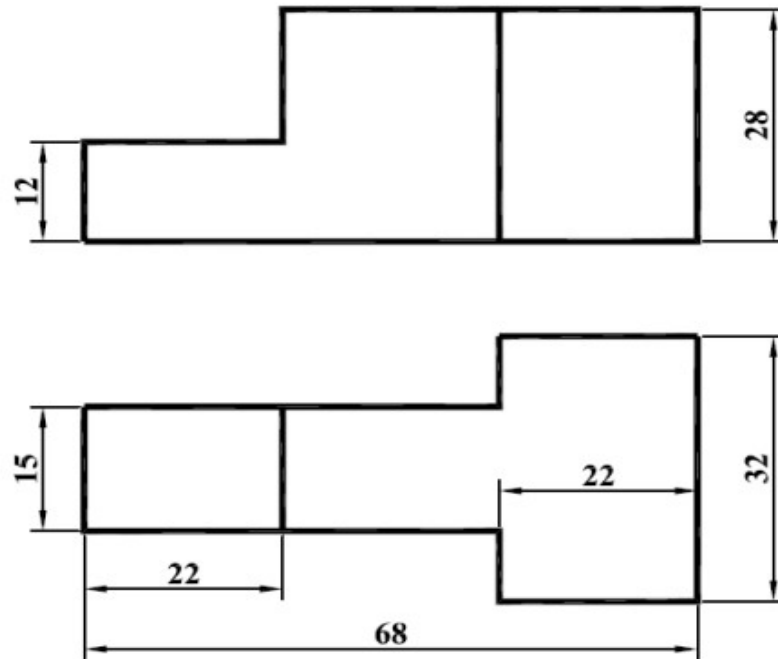


Figure: 1.3

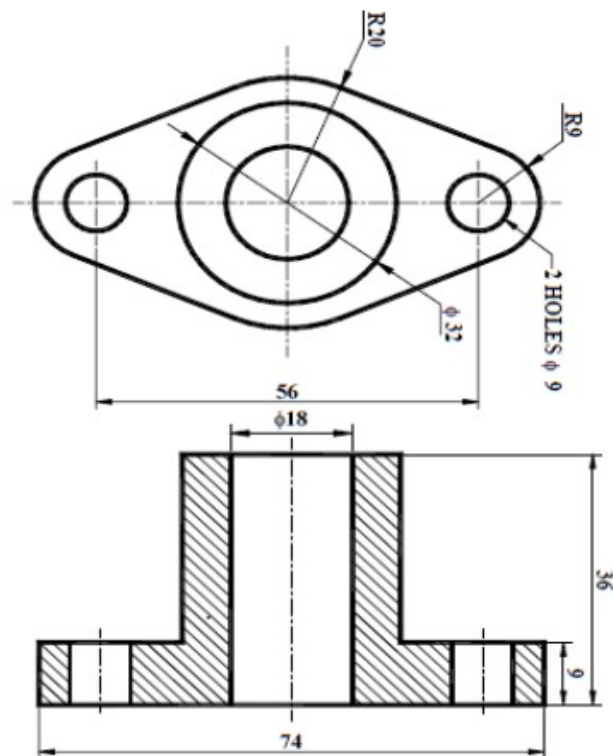


Figure: 1.4

2. Draw oblique drawings from given orthographic projections.

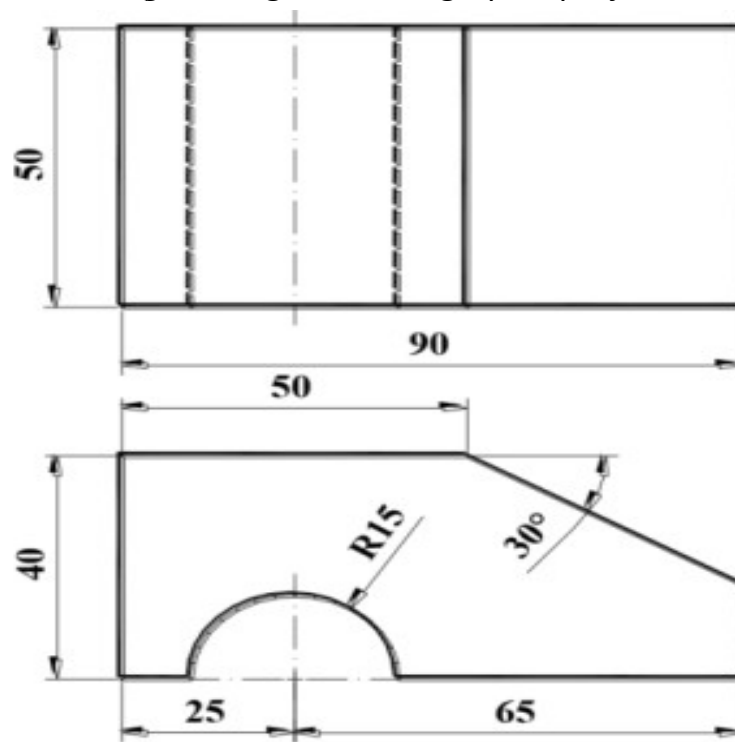


Figure: 2.1

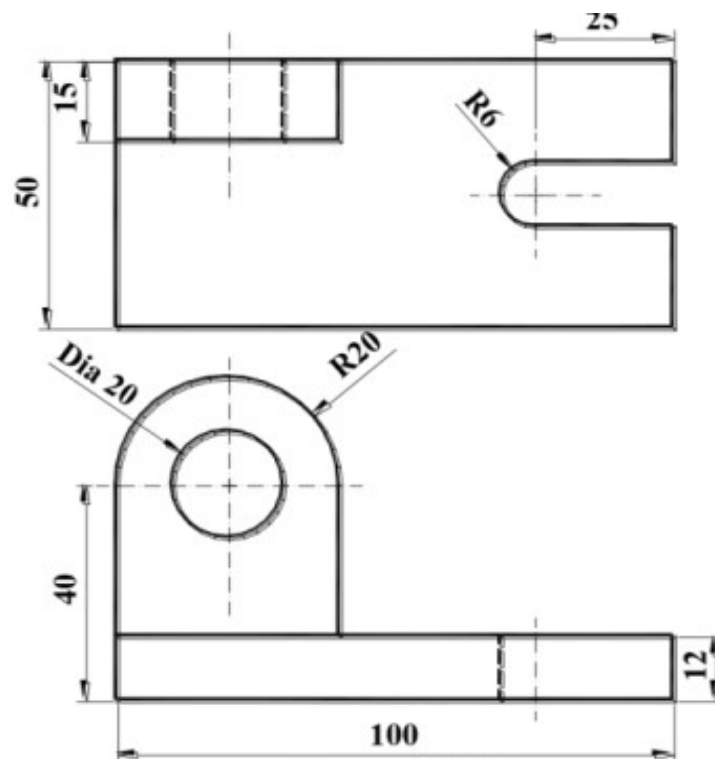


Figure: 2.2

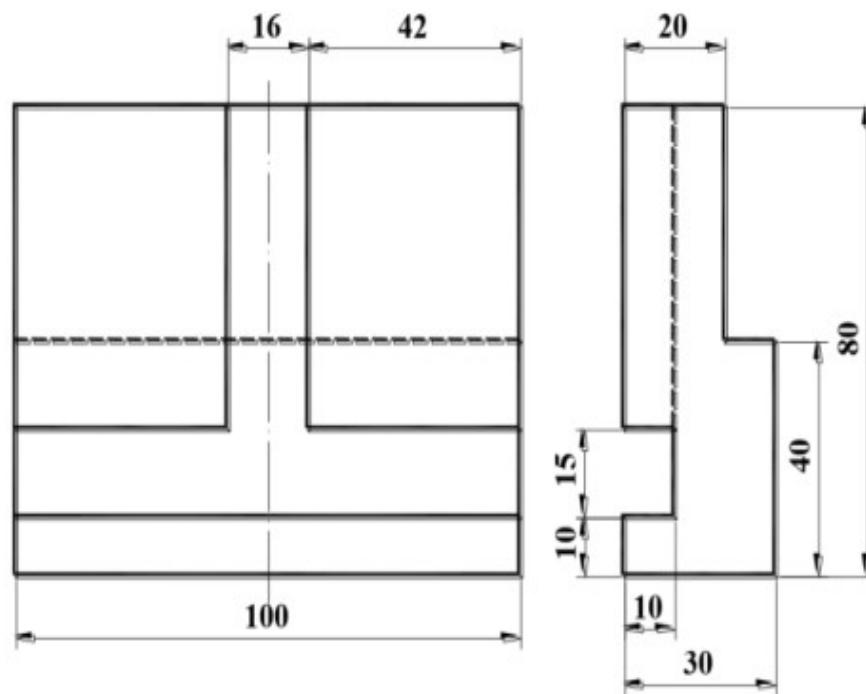


Figure 2.3

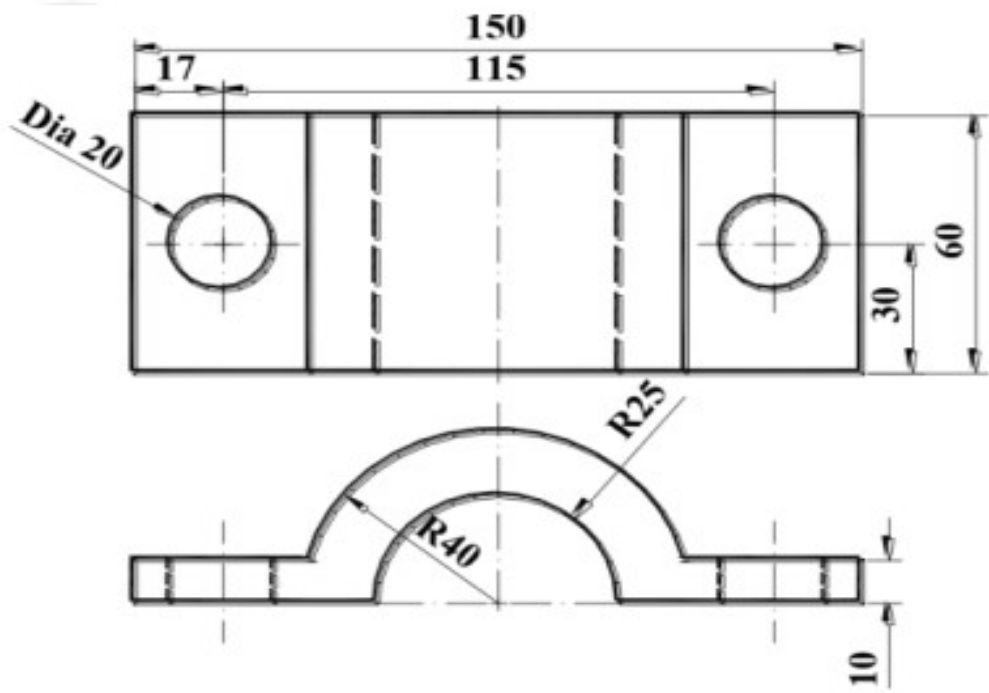


Figure: 2.4

3. Draw the perspective projection from the given orthographic views where SP is located 130 mm Below PP and 60 mm right from the right most edge of the TV. Also take horizon line 20mm below PP and ground line 150 mm below PP.

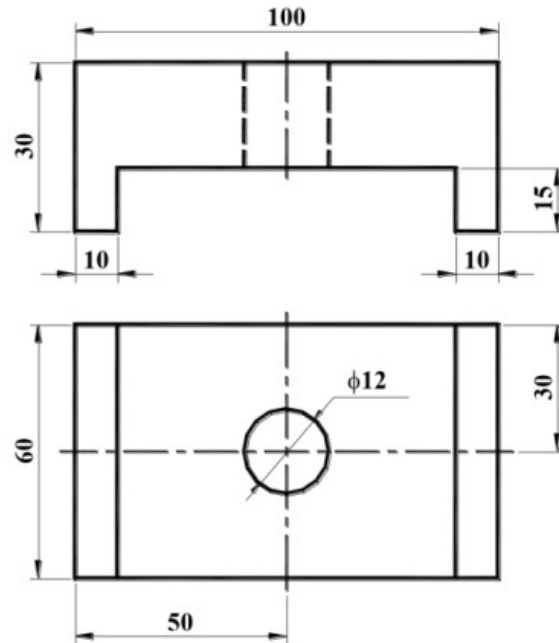


Fig: 3.1

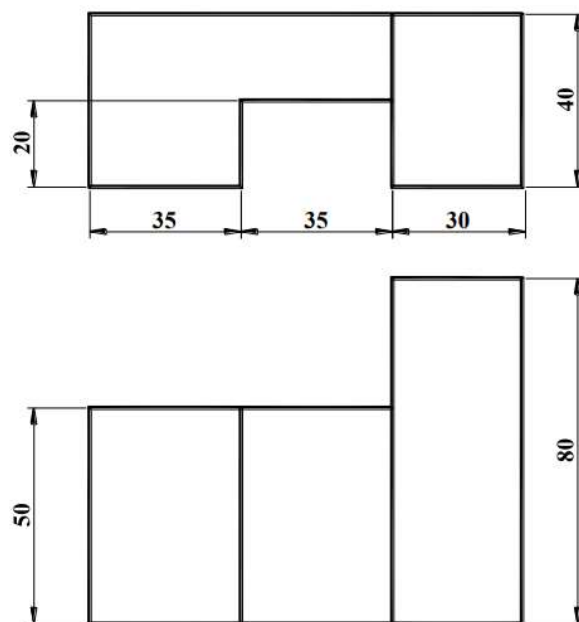


Fig: 3.2

4. Limit Fit Tolerances

- State the type of and system of the hole shaft assembly 50 H8 / d 9 . Illustrate with neat diagram. [Given : Fundamental Deviations $H = 0.00$, $d = -0.080$; Tolerance Grade values : $8 = 0.039$, $9 = 0.062$] .
- A hole and shaft have a basic size of 25 mm, and are to have a clearance fit with a maximum clearance of 0.02mm and a minimum clearance of 0.01mm. The hole tolerance to be 1.5 times the shaft tolerance. Determine the limits for both hole and shaft i) using hole basis system ii) using shaft basis system.
- 60 S6/h12 with complete solution.

