




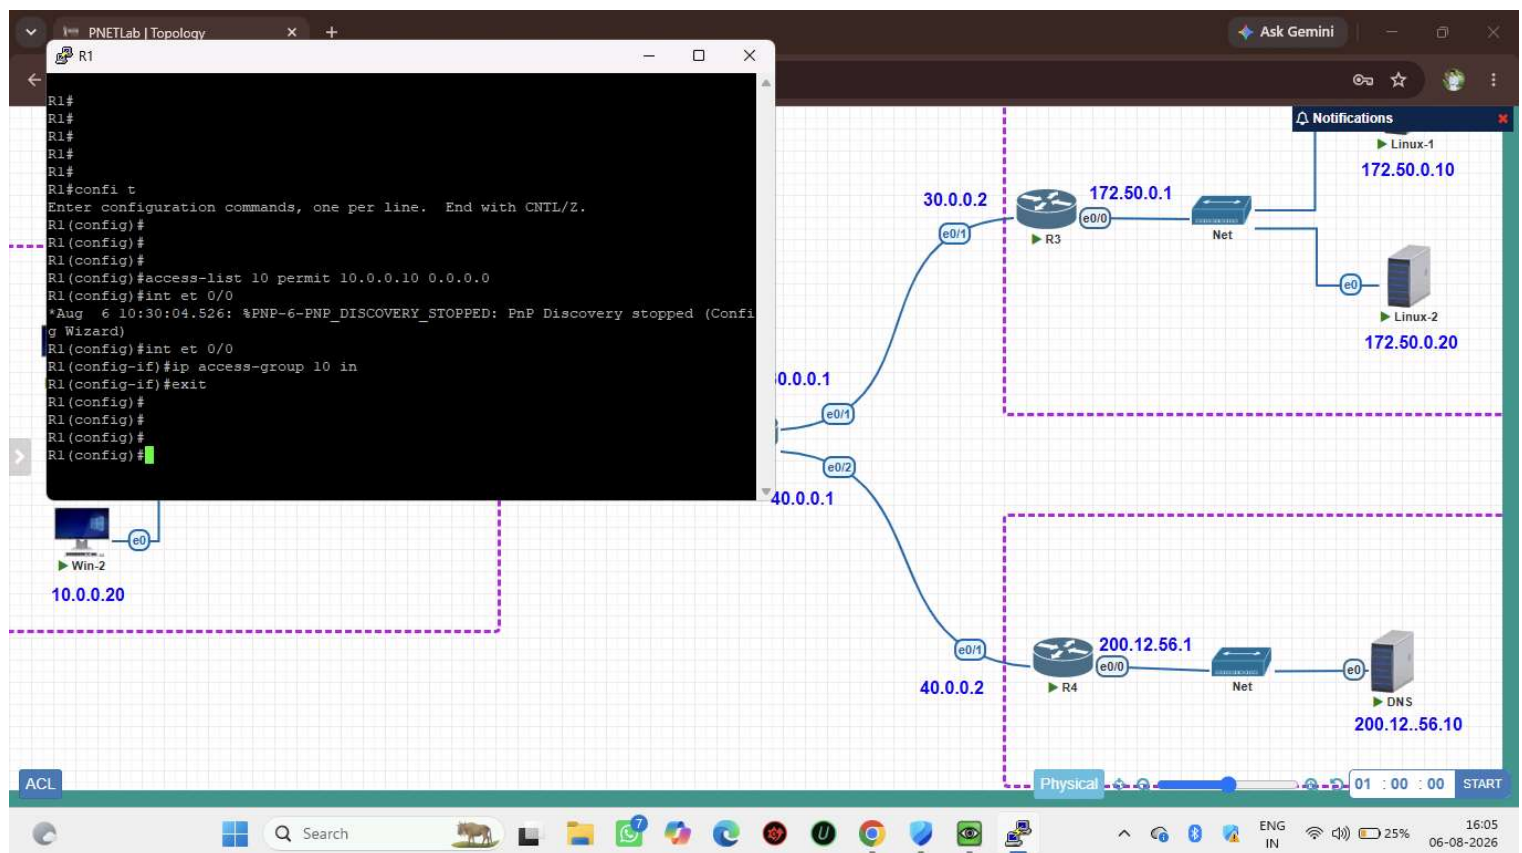

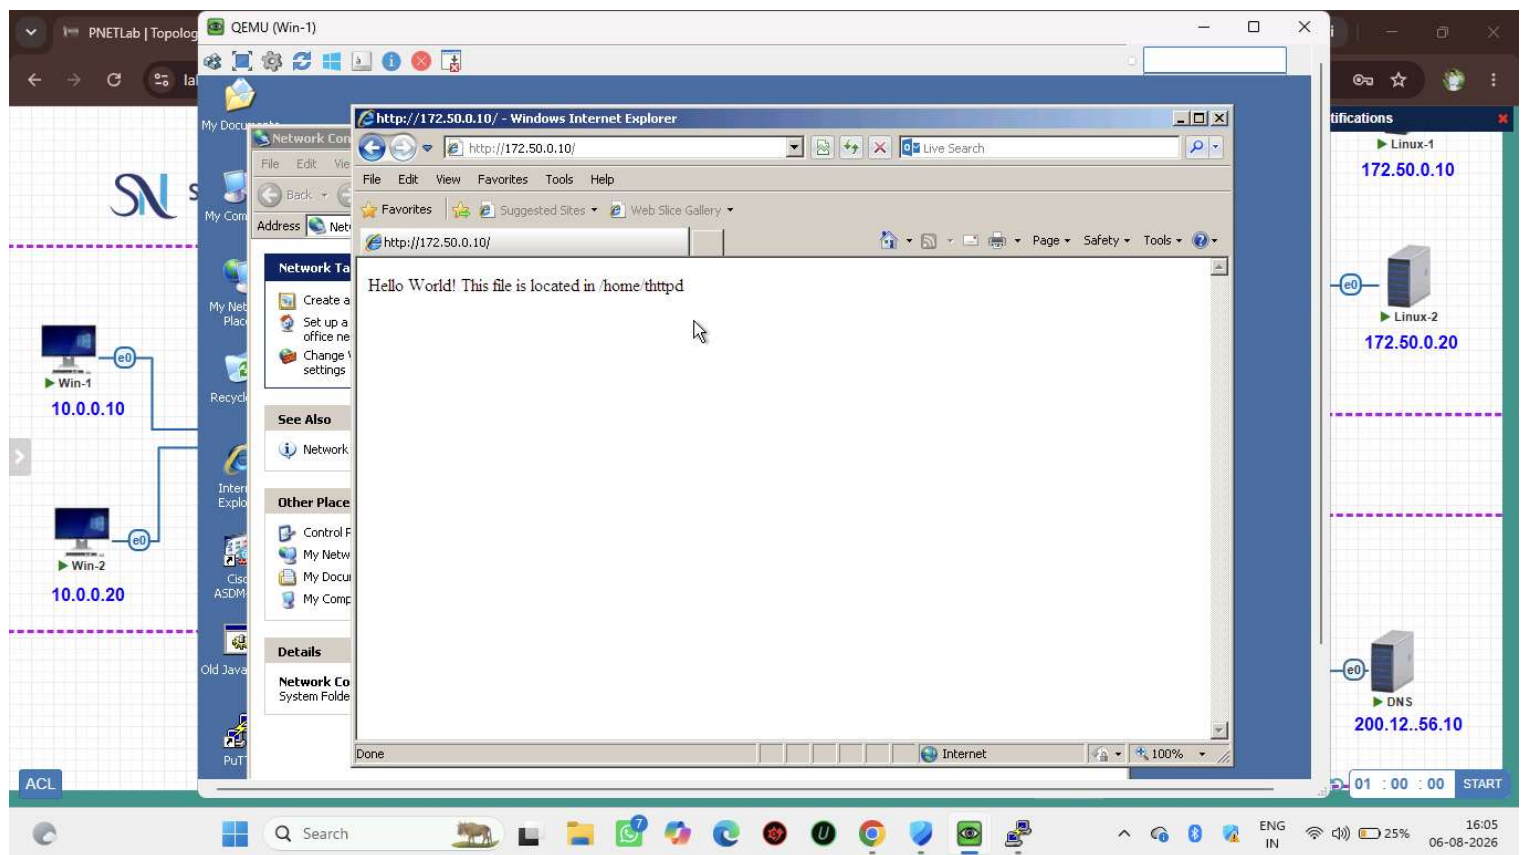

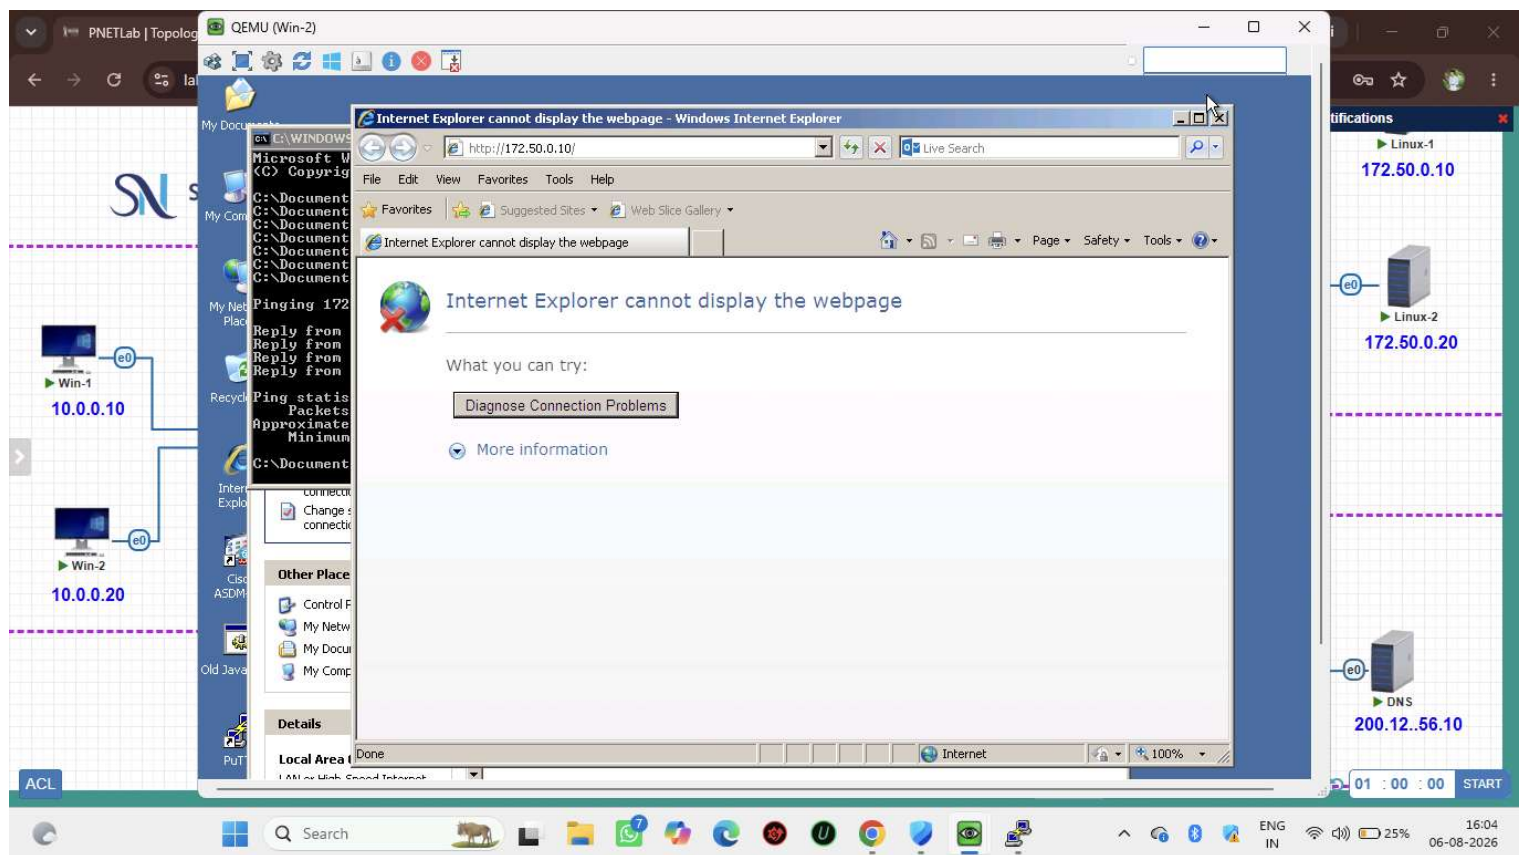

PNETLab | Topology

QEMU (Win-2)

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

```
C:\Documents and Settings\User>
C:\Documents and Settings\User>
C:\Documents and Settings\User>
C:\Documents and Settings\User>
C:\Documents and Settings\User>ping 172.50.0.20

Pinging 172.50.0.20 with 32 bytes of data:
Reply from 172.50.0.20: bytes=32 time=2ms TTL=61
Reply from 172.50.0.20: bytes=32 time=1ms TTL=61
Reply from 172.50.0.20: bytes=32 time=2ms TTL=61
Reply from 172.50.0.20: bytes=32 time=2ms TTL=61

Ping statistics for 172.50.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\User>
```

Win-1
10.0.0.10

Win-2
10.0.0.20

Linux-1
172.50.0.10

Linux-2
172.50.0.20

DNS
200.12.56.10

01 : 00 : 00 START

16:05
06-08-2026

PNETLab | Topology

labs.surrennetwork.com/legacy/topology

Ask Gemini

Notifications

- Linux-1 172.50.0.10
- Linux-2 172.50.0.20
- DNS 200.12..56.10

ACL

Physical

01 : 00 : 00 START

16:16 06-08-2026

ENG IN

23%

R1

```
R1#\n% Bad IP address or host name\n% Unknown command or computer name, or unable to find computer address\nR1#\nR1#\nR1#\nR1#\nR1#\nR1#\nR1#\nR1#\nR1#\nR1#config t\nEnter configuration commands, one per line. End with CNTL/Z.\nR1(config)#\nR1(config)#\n10.0.0R1(config)#access-list 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.10 0.0\n*Aug 6 10:43:42.071: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)\nR1(config)# 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.10 0.0.0.0 eq 80\nR1(config)# 100 permit tcp 10.0.0.20 0.0.0.0 172.50.0.20 0.0.0.0 eq 80\nR1(config)#int e0/0\nR1(config-if)#ip access-group 10 in\nR1(config-if)#\nR1(config-if)#\n10.0.0.20
```

Win-1

Win-2

30.0.0.2

172.50.0.1

40.0.0.2

200.12.56.1

200.12..56.10

R3

R4

Net

Net

Linux-1

Linux-2

DNS

0/1

0/2

e0/1

e0/0

e0

e0

