




```
ROUTER
AJ5(config)#
AJ5(config)#ip domain-name surennetwork.com
AJ5(config)#username admin privilege secret guhan0504
^
% Invalid input detected at '^' marker.
AJ5(config)#username admin privilege secret guhan0504
^
% Invalid input detected at '^' marker.
AJ5(config)#username admin privilege secret Cisco@123
^
% Invalid input detected at '^' marker.
AJ5(config)#username admin privilege secret 15 guhan0510
^
% Invalid input detected at '^' marker.
AJ5(config)#username admin privilege secret 15 Cisco@123
^
% Invalid input detected at '^' marker.
AJ5(config)#username admin privilege 15 secret Cisco@123
AJ5(config)#crypto key gener
*Jul 17 15:47:01.845: %SYS-5-CONFIG_I: Configured from console by AJ5 (cisco@123)
AJ5(config)#crypto key generate rsa
The name for the keys will be: AJ5.surennetwork.com
Choose the size of the key modulus in the range of 360 to 4096 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.
How many bits in the modulus [512]: 2048
% Generating 2048 bit RSA keys, keys will be non-exportable...
[OK] (elapsed time was 5 seconds)
AJ5(config)#
*Jul 17 15:49:44.174: %SSH-5-ENABLED: SSH 1.99 has been enabled
AJ5(config)#ip ssh version 2
AJ5(config)#line vty 0 4
AJ5(config-line)#login local
AJ5(config-line)#transport input ssh
AJ5(config-line)#exit
AJ5(config)#
```

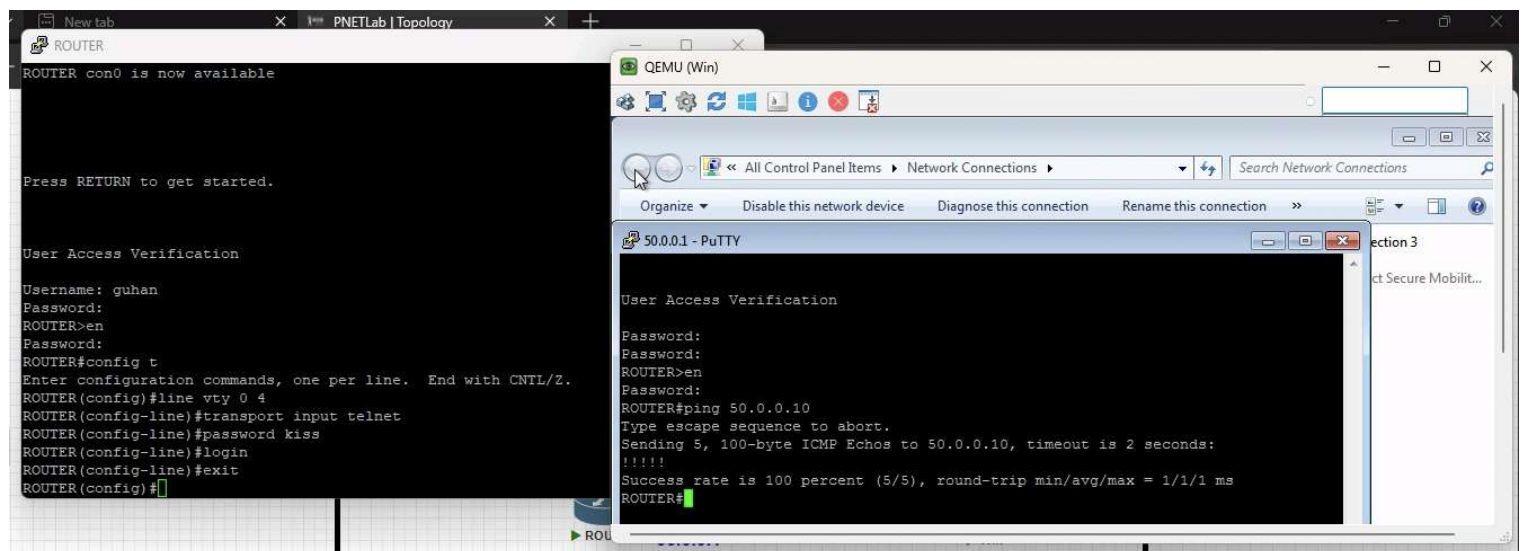