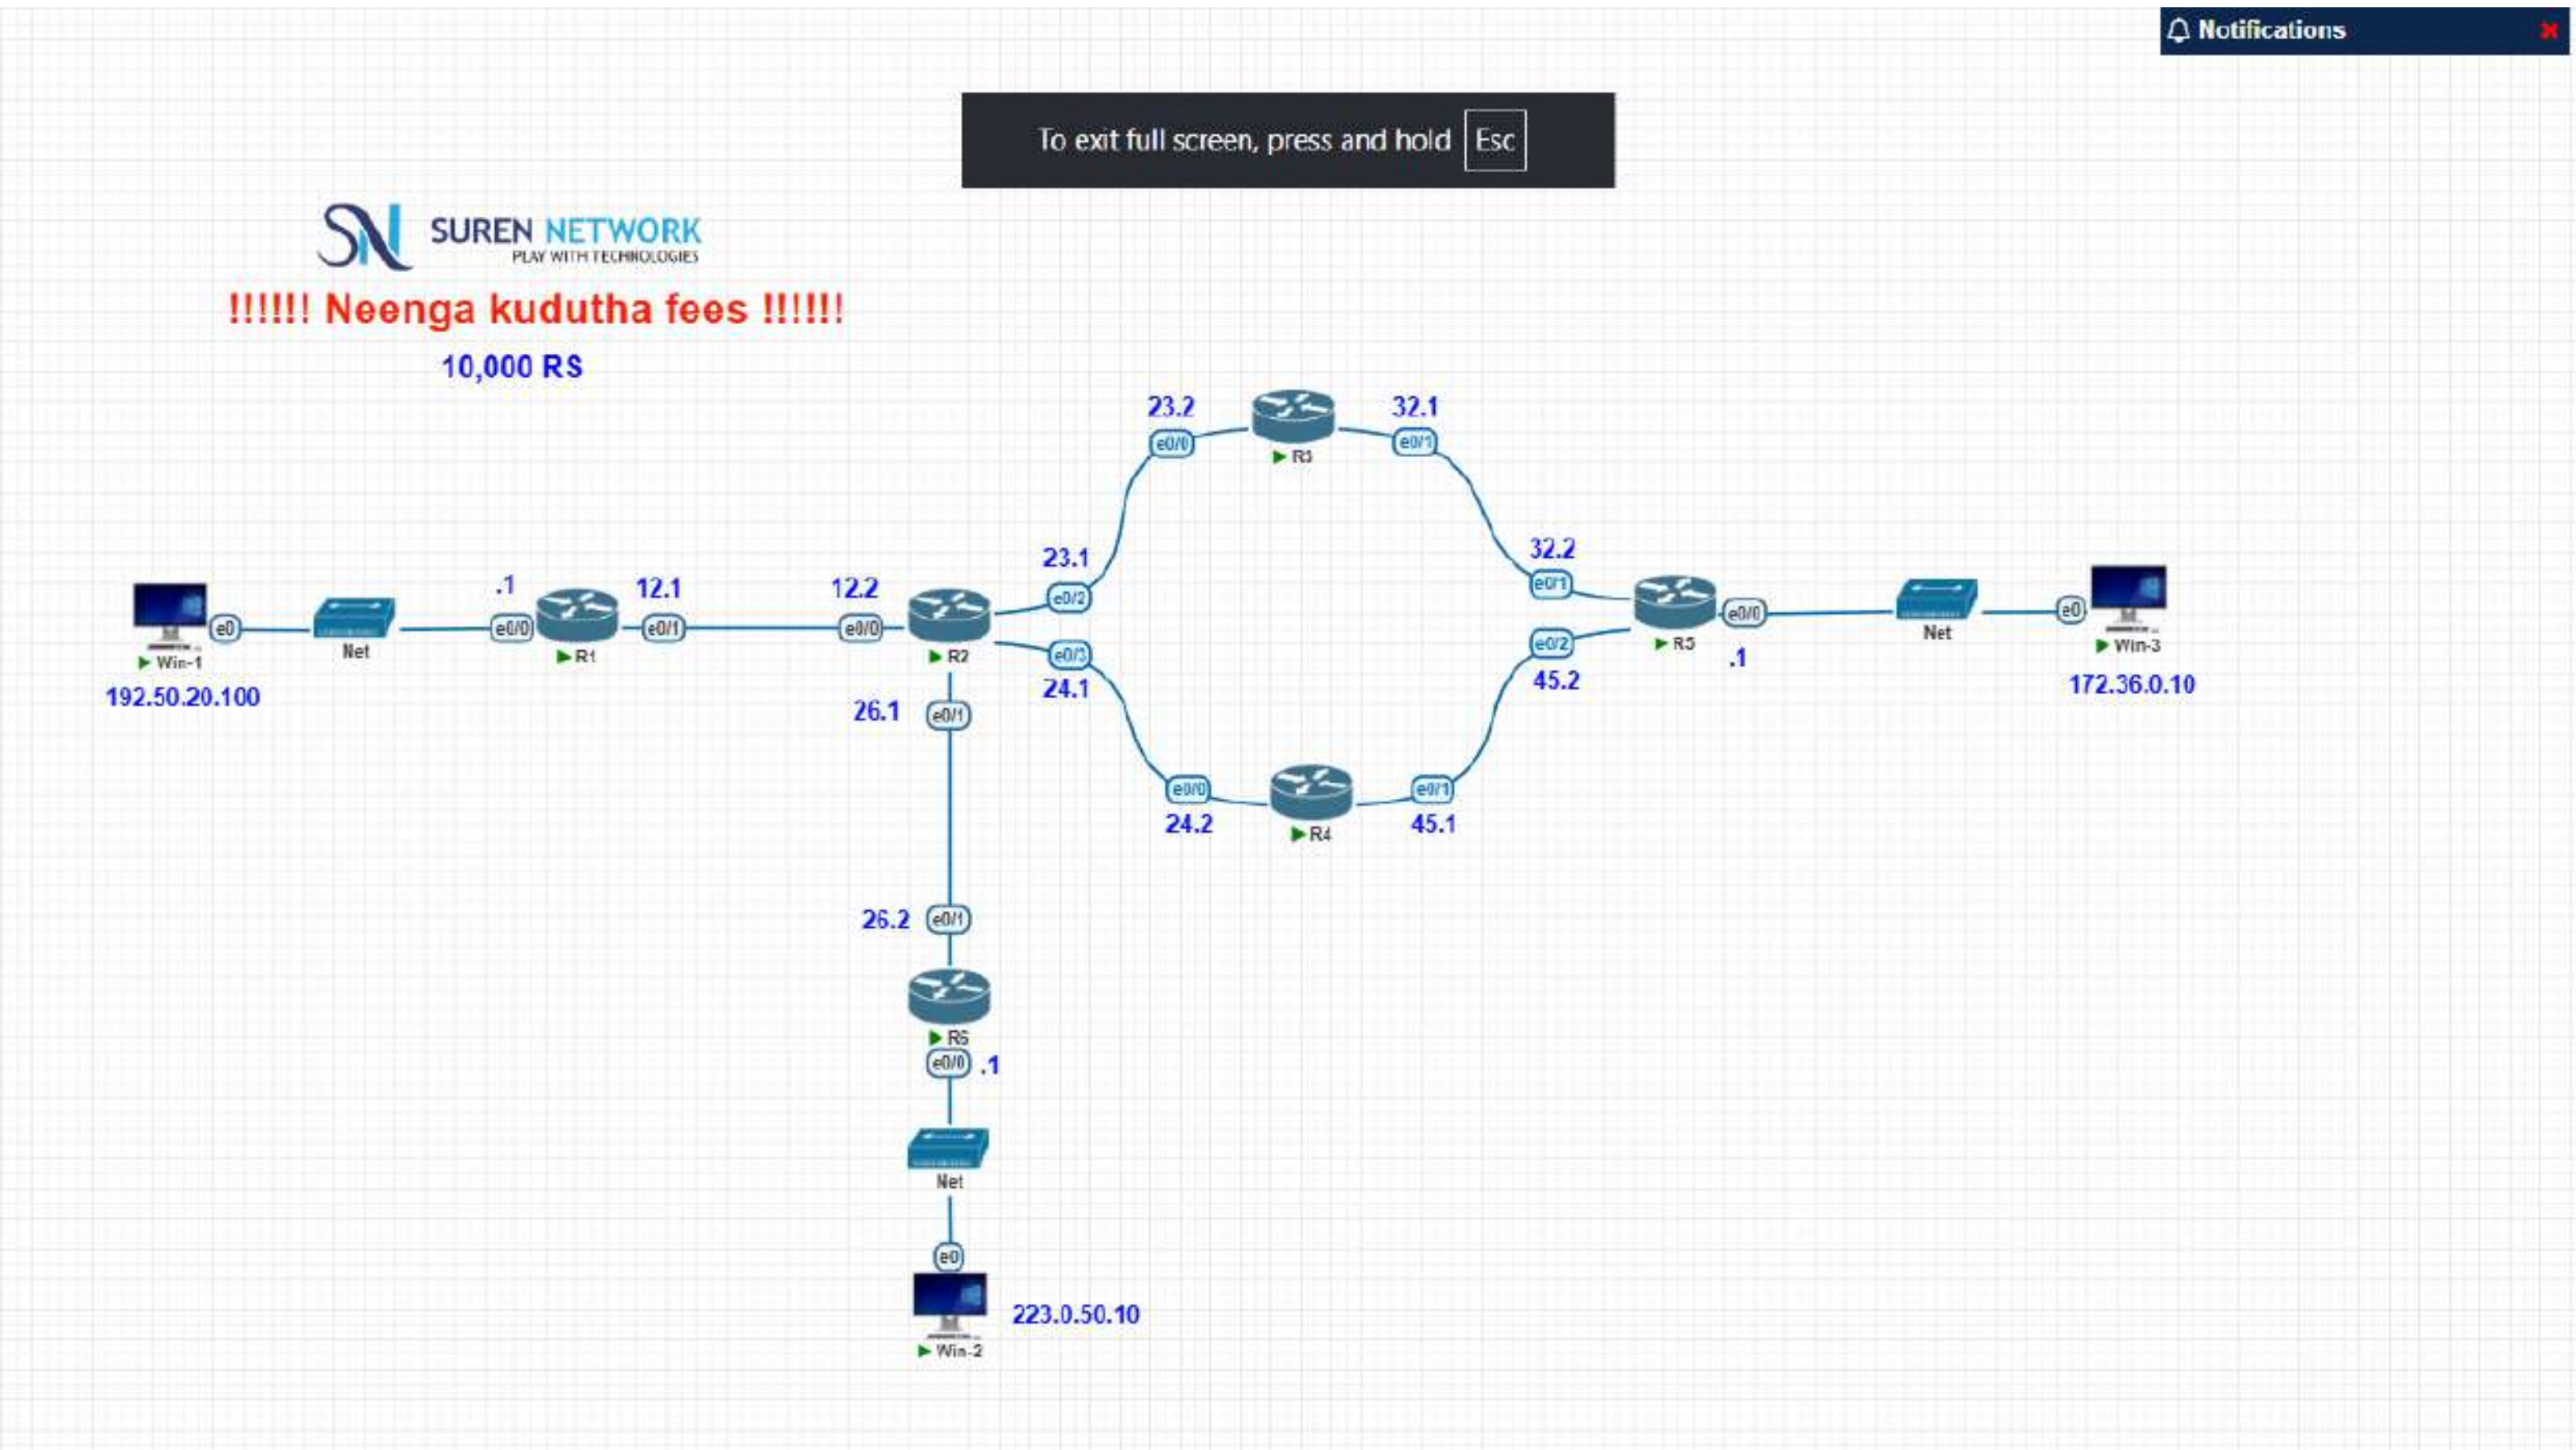
Notifications
To exit full screen, press and hold Esc
SUREN NETWORK
PLAY WITH TECHNOLOGIES
!!!!!! Neenga kudutha fees !!!!!!
10,000 RS
Win-1
192.50.20.100
e0
Net
.1
e0/0
R1
12.1
e0/1
12.2
e0/0
R2
23.1
e0/2
e0/3
24.1
26.1
e0/1
23.2
e0/0
R3
32.1
e0/1
32.2
e0/1
e0/2
45.2
R5
e0/0
.1
e0/0
24.2
R4
e0/1
45.1
26.2
e0/1
R6
e0/0
.1
Net
e0
Win-2
223.0.50.10
Net
e0
Win-3
172.36.0.10

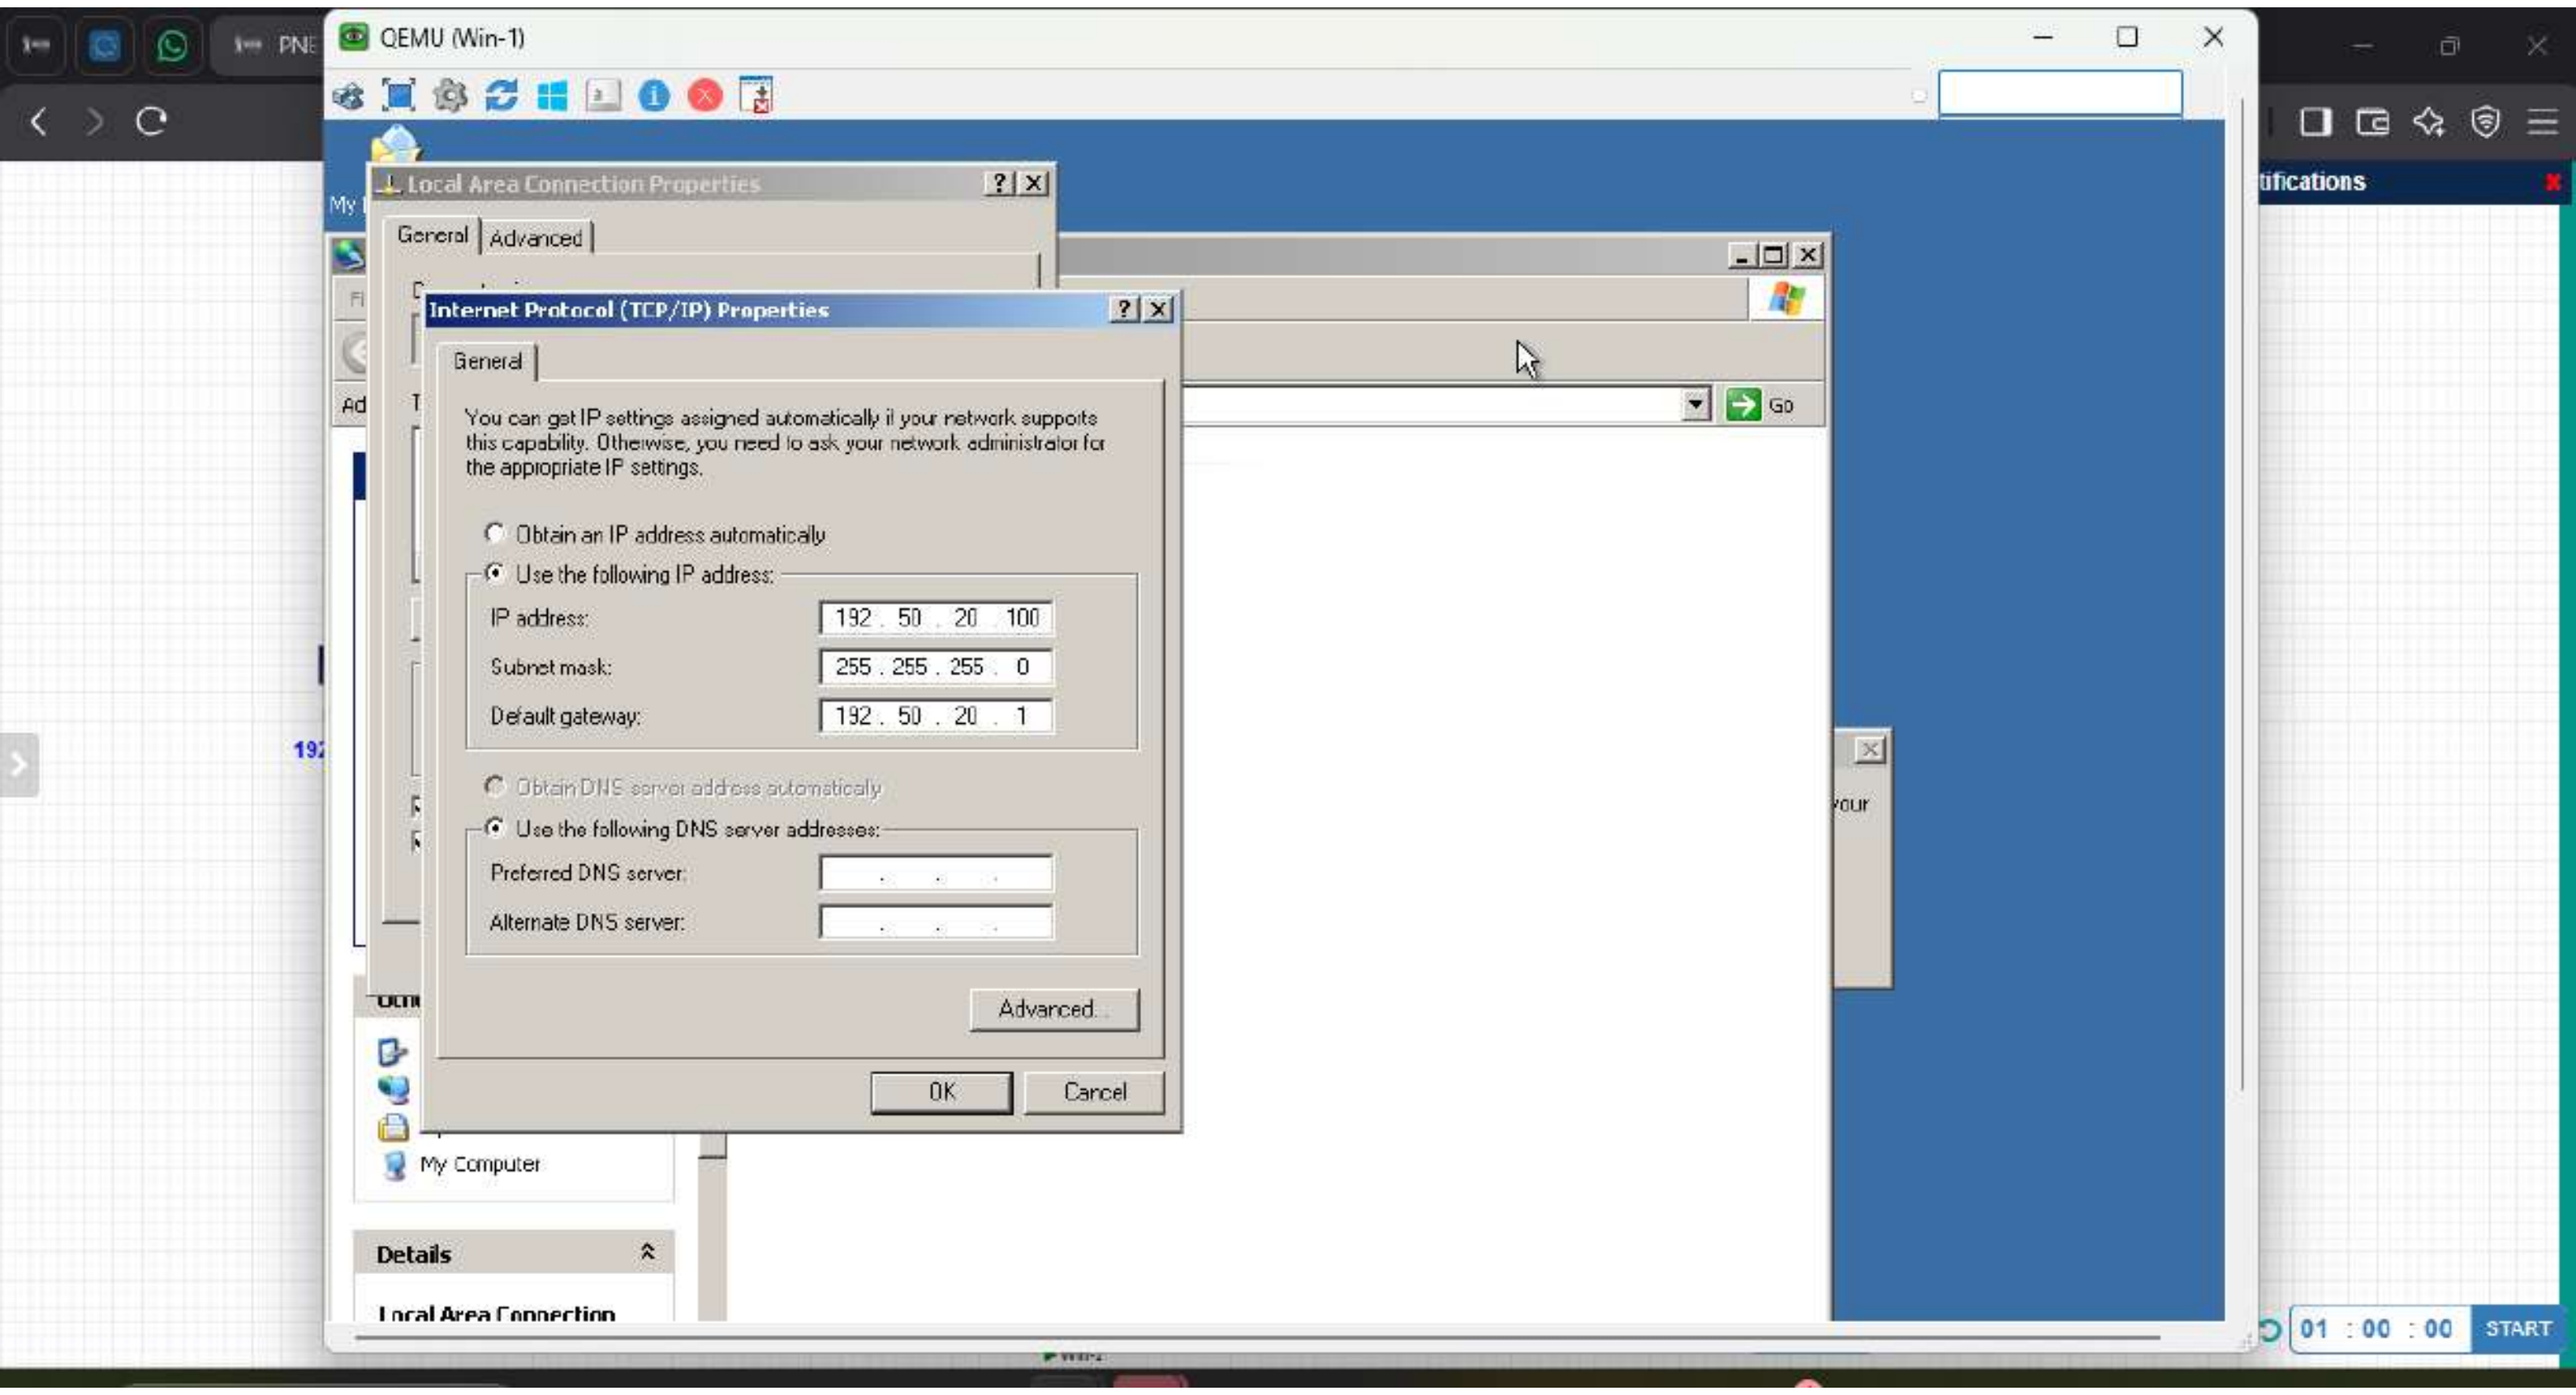

QEMU (Win-1)
Local Area Connection Properties
General
Advanced
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address: 192 . 50 . 20 . 100
Subnet mask: 255 . 255 . 255 . 0
Default gateway: 192 . 50 . 20 . 1
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server:
Alternate DNS server:
Advanced...
OK
Cancel
Go
My Computer
Details
Local Area Connection
tifications
01 : 00 : 00
START

R1

```
show ip int b
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                192.50.20.1     YES manual up                    up

Ethernet0/1                12.0.0.1        YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

Ethernet0/3                unassigned      YES TFTP   down                  down

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        12.0.0.0/8 is directly connected, Ethernet0/1
L        12.0.0.1/32 is directly connected, Ethernet0/1
S     23.0.0.0/8 [1/0] via 12.0.0.2
S     24.0.0.0/8 [1/0] via 12.0.0.2
S     26.0.0.0/8 [1/0] via 12.0.0.2
S     32.0.0.0/8 [1/0] via 12.0.0.2
S     45.0.0.0/8 [1/0] via 12.0.0.2
S     172.36.0.0/16 [1/0] via 12.0.0.2
      192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
 --More--
```

0 : 00 START

Search

33°C
Mostly sunny

ENG
US

4:16 PM
7/23/2026

R2

```
R2#
R2#show ip int b
Interface                  IP-Address      OK? Method Status                Protocol
Ethernet0/0                12.0.0.2        YES manual up                    up
Ethernet0/1                26.0.0.1        YES manual up                    up
Ethernet0/2                23.0.0.1        YES manual up                    up
Ethernet0/3                unassigned      YES TFTP   up                    up
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        12.0.0.0/8 is directly connected, Ethernet0/0
L        12.0.0.2/32 is directly connected, Ethernet0/0
      23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        23.0.0.0/8 is directly connected, Ethernet0/2
L        23.0.0.1/32 is directly connected, Ethernet0/2
      26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        26.0.0.0/8 is directly connected, Ethernet0/1
L        26.0.0.1/32 is directly connected, Ethernet0/1
S     32.0.0.0/8 [1/0] via 23.0.0.2
 --More--
```

Search 33°C Mostly sunny ENG US 4:17 PM 7/23/2026

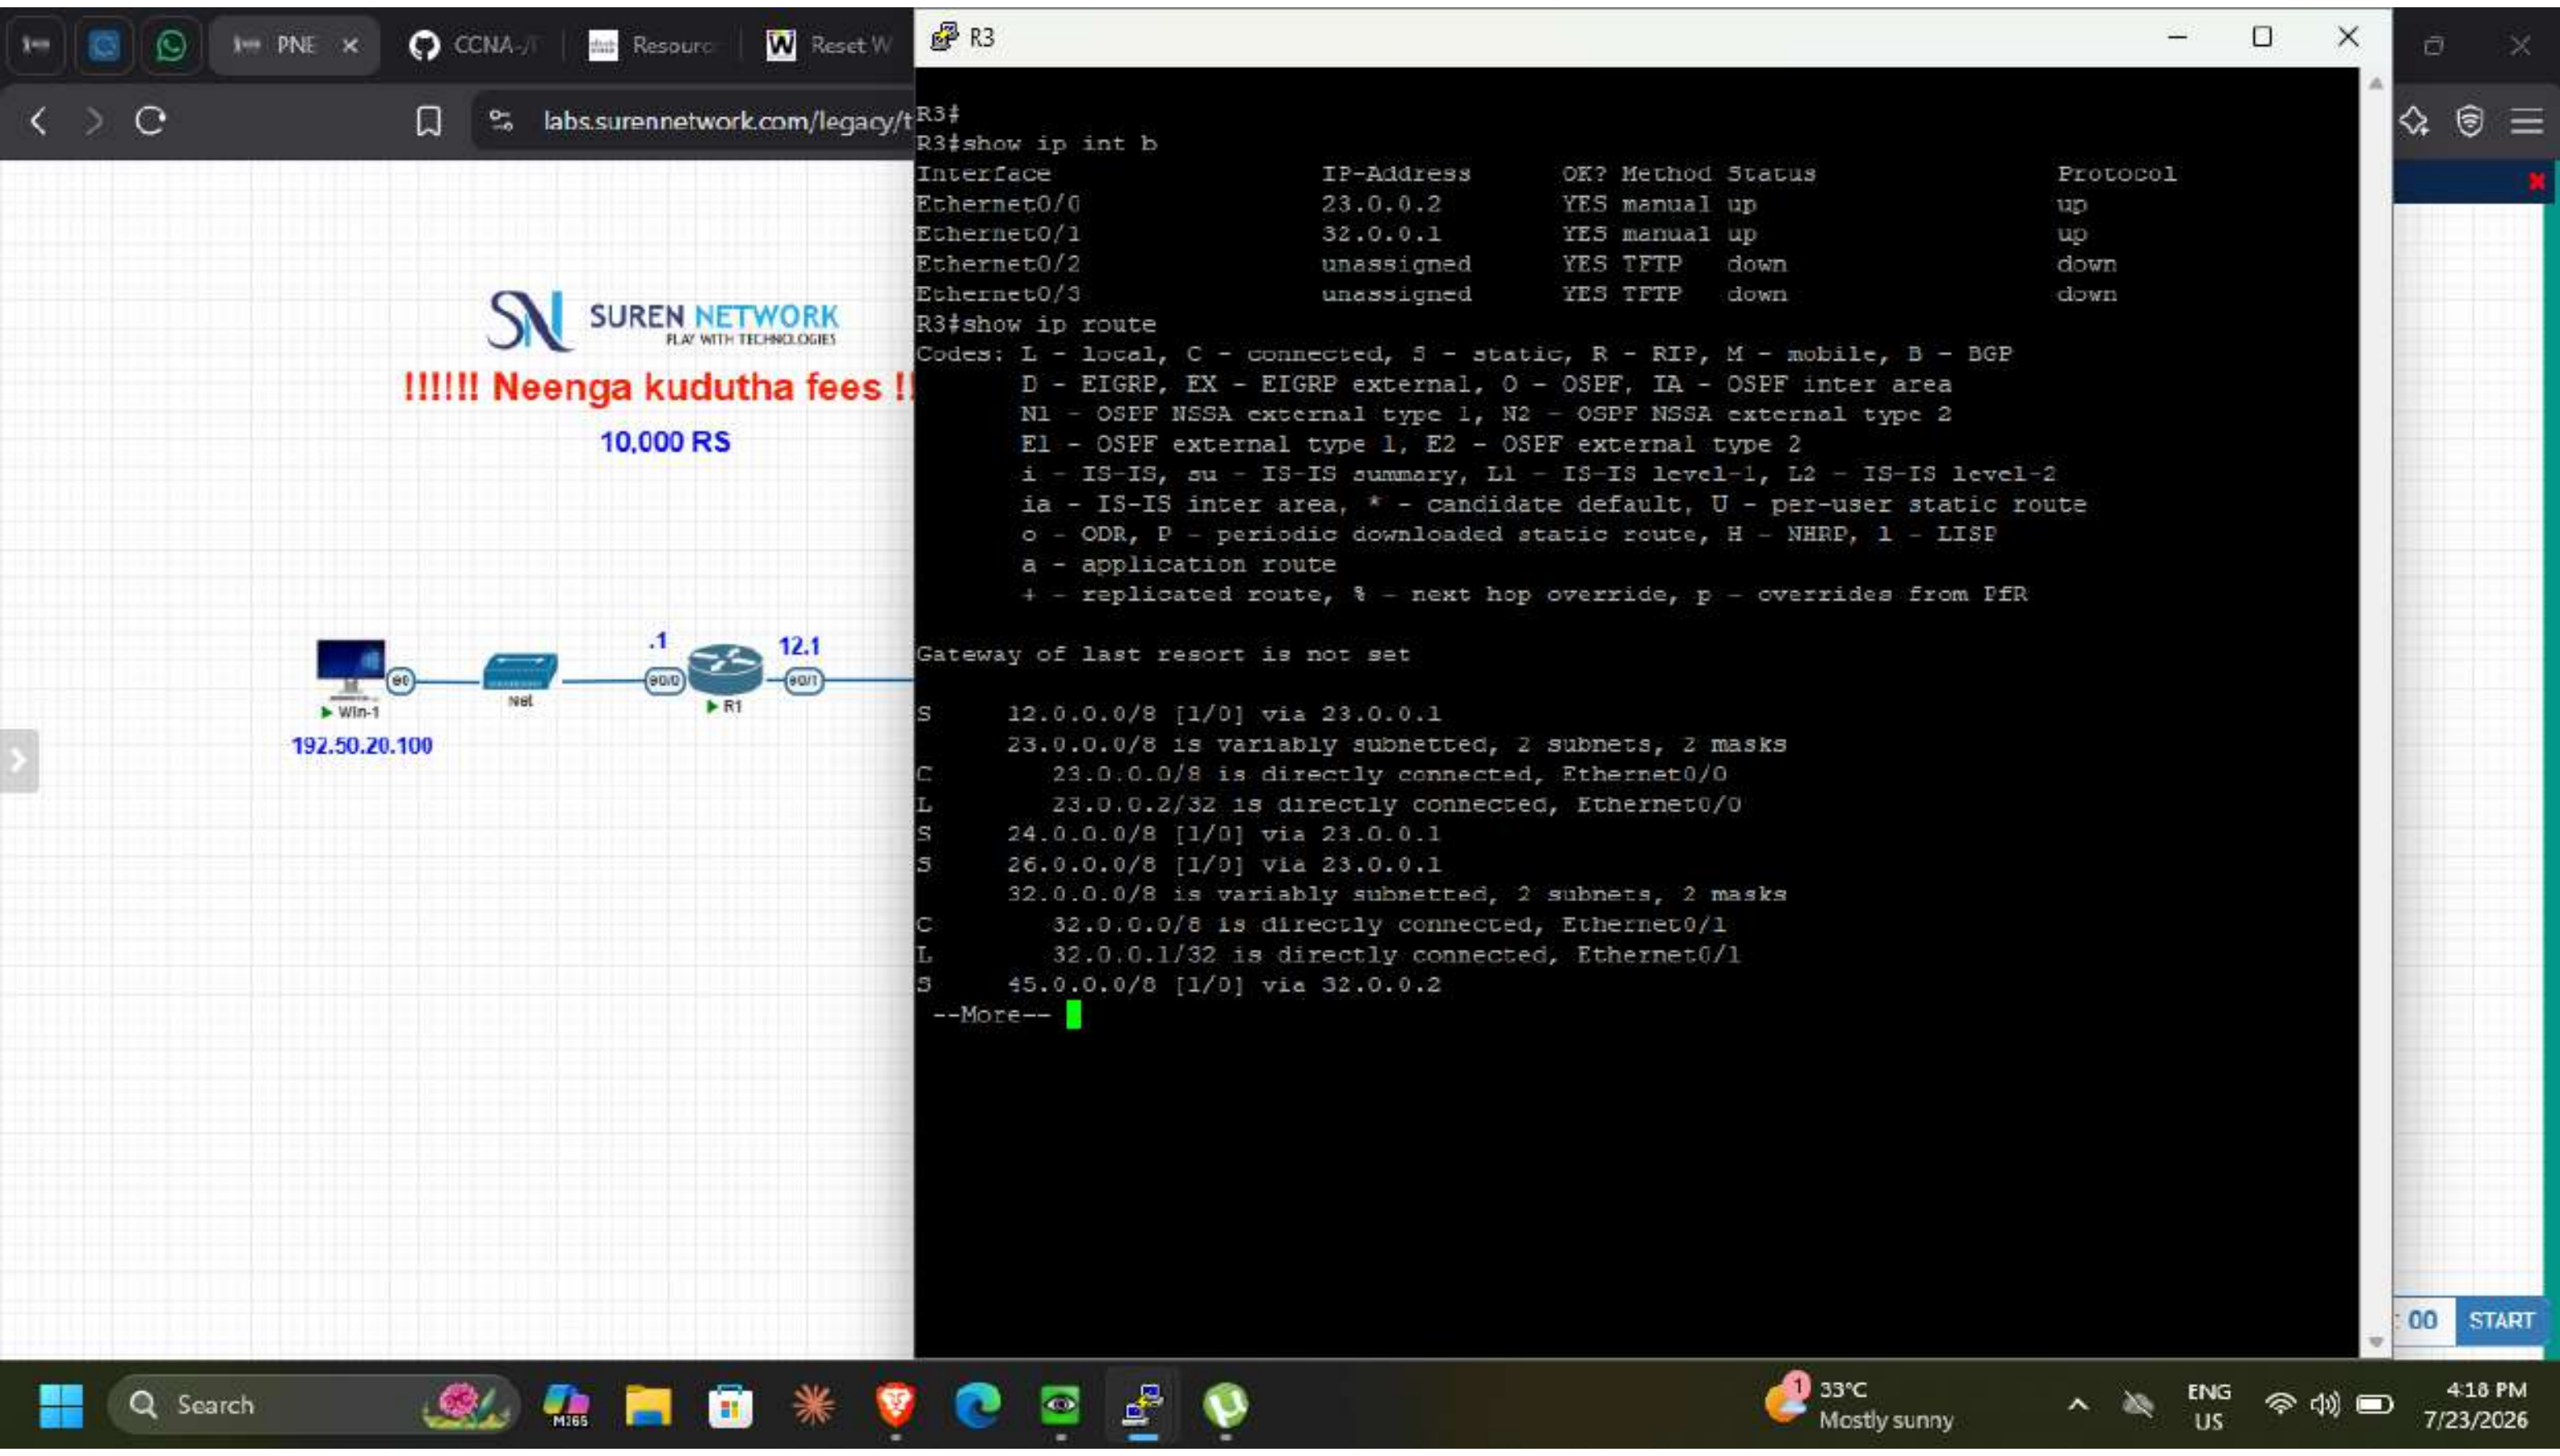
PNE
CCNA-/
Resourc
Reset W
labs.surennetwork.com/legacy/t
SUREN NETWORK
PLAY WITH TECHNOLOGIES
!!!!!! Neenga kudutha fees !!
10,000 RS
.1
12.1
Win-1
Net
R1
192.50.20.100
R3
R3#
R3#show ip int b
Interface   IP-Address   OK? Method Status   Protocol
Ethernet0/0   23.0.0.2   YES manual up   up
Ethernet0/1   32.0.0.1   YES manual up   up
Ethernet0/2   unassigned   YES TFTP   down   down
Ethernet0/3   unassigned   YES TFTP   down   down
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set
S   12.0.0.0/8 [1/0] via 23.0.0.1
23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   23.0.0.0/8 is directly connected, Ethernet0/0
L   23.0.0.2/32 is directly connected, Ethernet0/0
S   24.0.0.0/8 [1/0] via 23.0.0.1
S   26.0.0.0/8 [1/0] via 23.0.0.1
32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   32.0.0.0/8 is directly connected, Ethernet0/1
L   32.0.0.1/32 is directly connected, Ethernet0/1
S   45.0.0.0/8 [1/0] via 32.0.0.2
--More--
00
START
Search
33°C
Mostly sunny
ENG
US
4:18 PM
7/23/2026

R4

```
 logging synchronous
line vty 0 4
 login
 transport input none
!
!
end

R4#show ip int b
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                24.0.0.2        YES manual up                    up

Ethernet0/1                45.0.0.1        YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

Ethernet0/3                unassigned      YES TFTP   down                  down

R4#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 24.0.0.1
S     23.0.0.0/8 [1/0] via 24.0.0.1
      24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        24.0.0.0/8 is directly connected, Ethernet0/0
L        24.0.0.2/32 is directly connected, Ethernet0/0
S     26.0.0.0/8 [1/0] via 24.0.0.1
S     30.0.0.0/8 [1/0] via 45.0.0.2
      45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        45.0.0.0/8 is directly connected, Ethernet0/1
L        45.0.0.1/32 is directly connected, Ethernet0/1
 --More--
```

Drivers | Surface | HP Elite | HP Elite | Downlo

Notifications

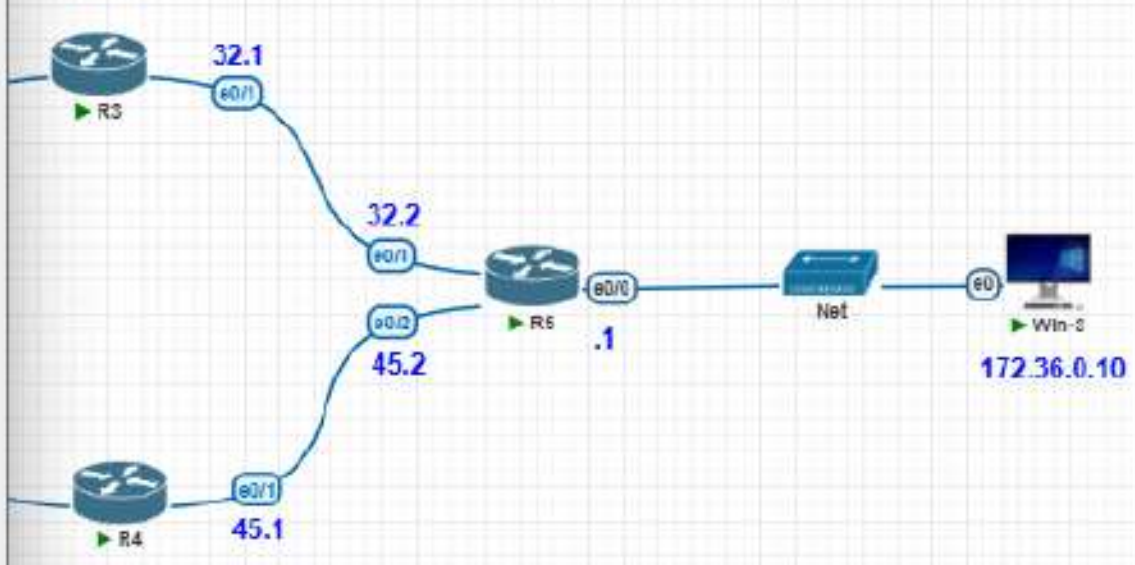

Physical 01 : 00 : 00 START

Search

33°C
Mostly sunny

ENG
US

4:18 PM
7/23/2026

```
R5#
R5#show ip int b
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                172.36.0.1      YES manual up                    up

Ethernet0/1                32.0.0.2        YES manual up                    up

Ethernet0/2                45.0.0.2        YES manual up                    up

Ethernet0/3                unassigned      YES TFTP   down                  down

R5#show ip config
             ^
% Invalid input detected at '^' marker.

R5#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 45.0.0.1
                 [1/0] via 32.0.0.1
S     23.0.0.0/8 [1/0] via 45.0.0.1
                 [1/0] via 32.0.0.1
S     24.0.0.0/8 [1/0] via 45.0.0.1
                 [1/0] via 32.0.0.1
S     26.0.0.0/8 [1/0] via 45.0.0.1
                 [1/0] via 32.0.0.1
      32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        32.0.0.0/8 is directly connected, Ethernet0/1
 --More--
```

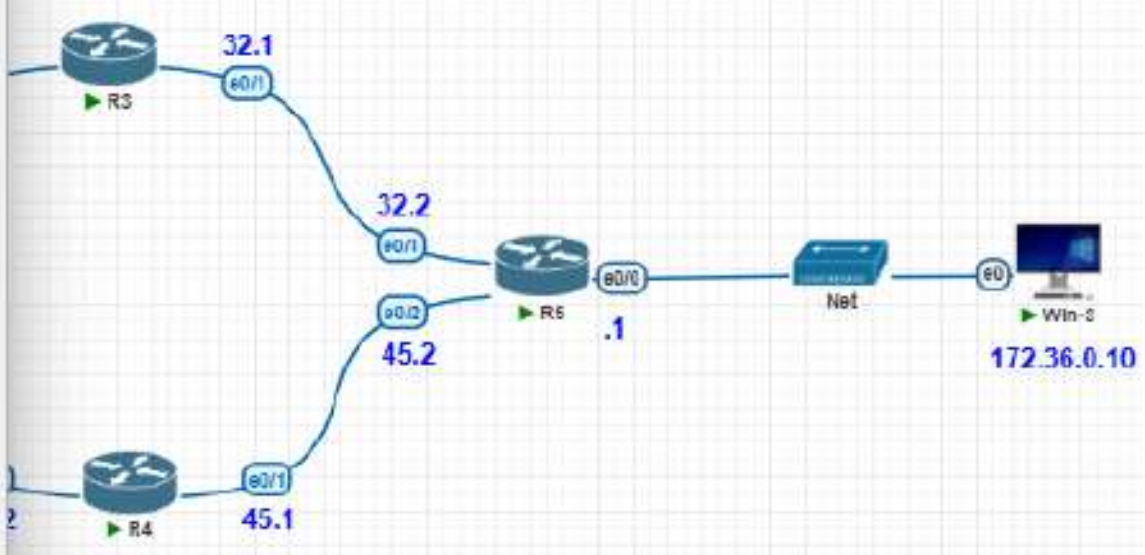

labs.surennetwork.com/legacy/topology

R6

```
!
end

R6#show ip  int b
Interface                  IP-Address      OK? Method Status                Prot
ocol
Ethernet0/0                223.0.50.1      YES manual up                    up

Ethernet0/1                26.0.0.2        YES manual up                    up

Ethernet0/2                unassigned      YES TFTP   down                  down

Ethernet0/3                unassigned      YES TFTP   down                  down

R6#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 26.0.0.1
S     23.0.0.0/8 [1/0] via 26.0.0.1
S     24.0.0.0/8 [1/0] via 26.0.0.1
      26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        26.0.0.0/8 is directly connected, Ethernet0/1
L        26.0.0.2/32 is directly connected, Ethernet0/1
S     32.0.0.0/8 [1/0] via 26.0.0.1
S     45.0.0.0/8 [1/0] via 26.0.0.1
S     172.36.0.0/16 [1/0] via 26.0.0.1
S     192.50.20.0/24 [1/0] via 26.0.0.1
 --More--
```

Notifications

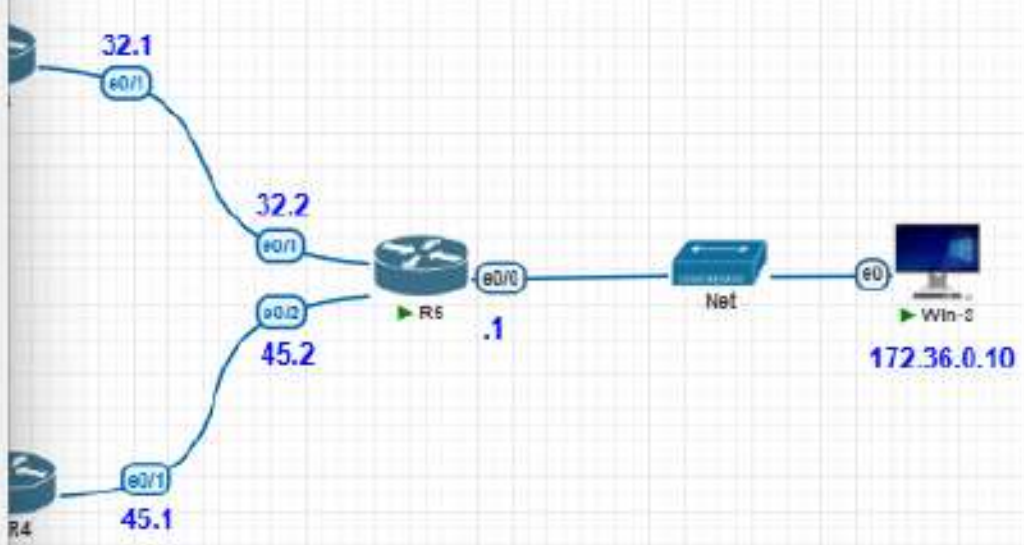

Physical 01 : 00 : 00 START

33°C Mostly sunny ENG US 4:20 PM 7/23/2026

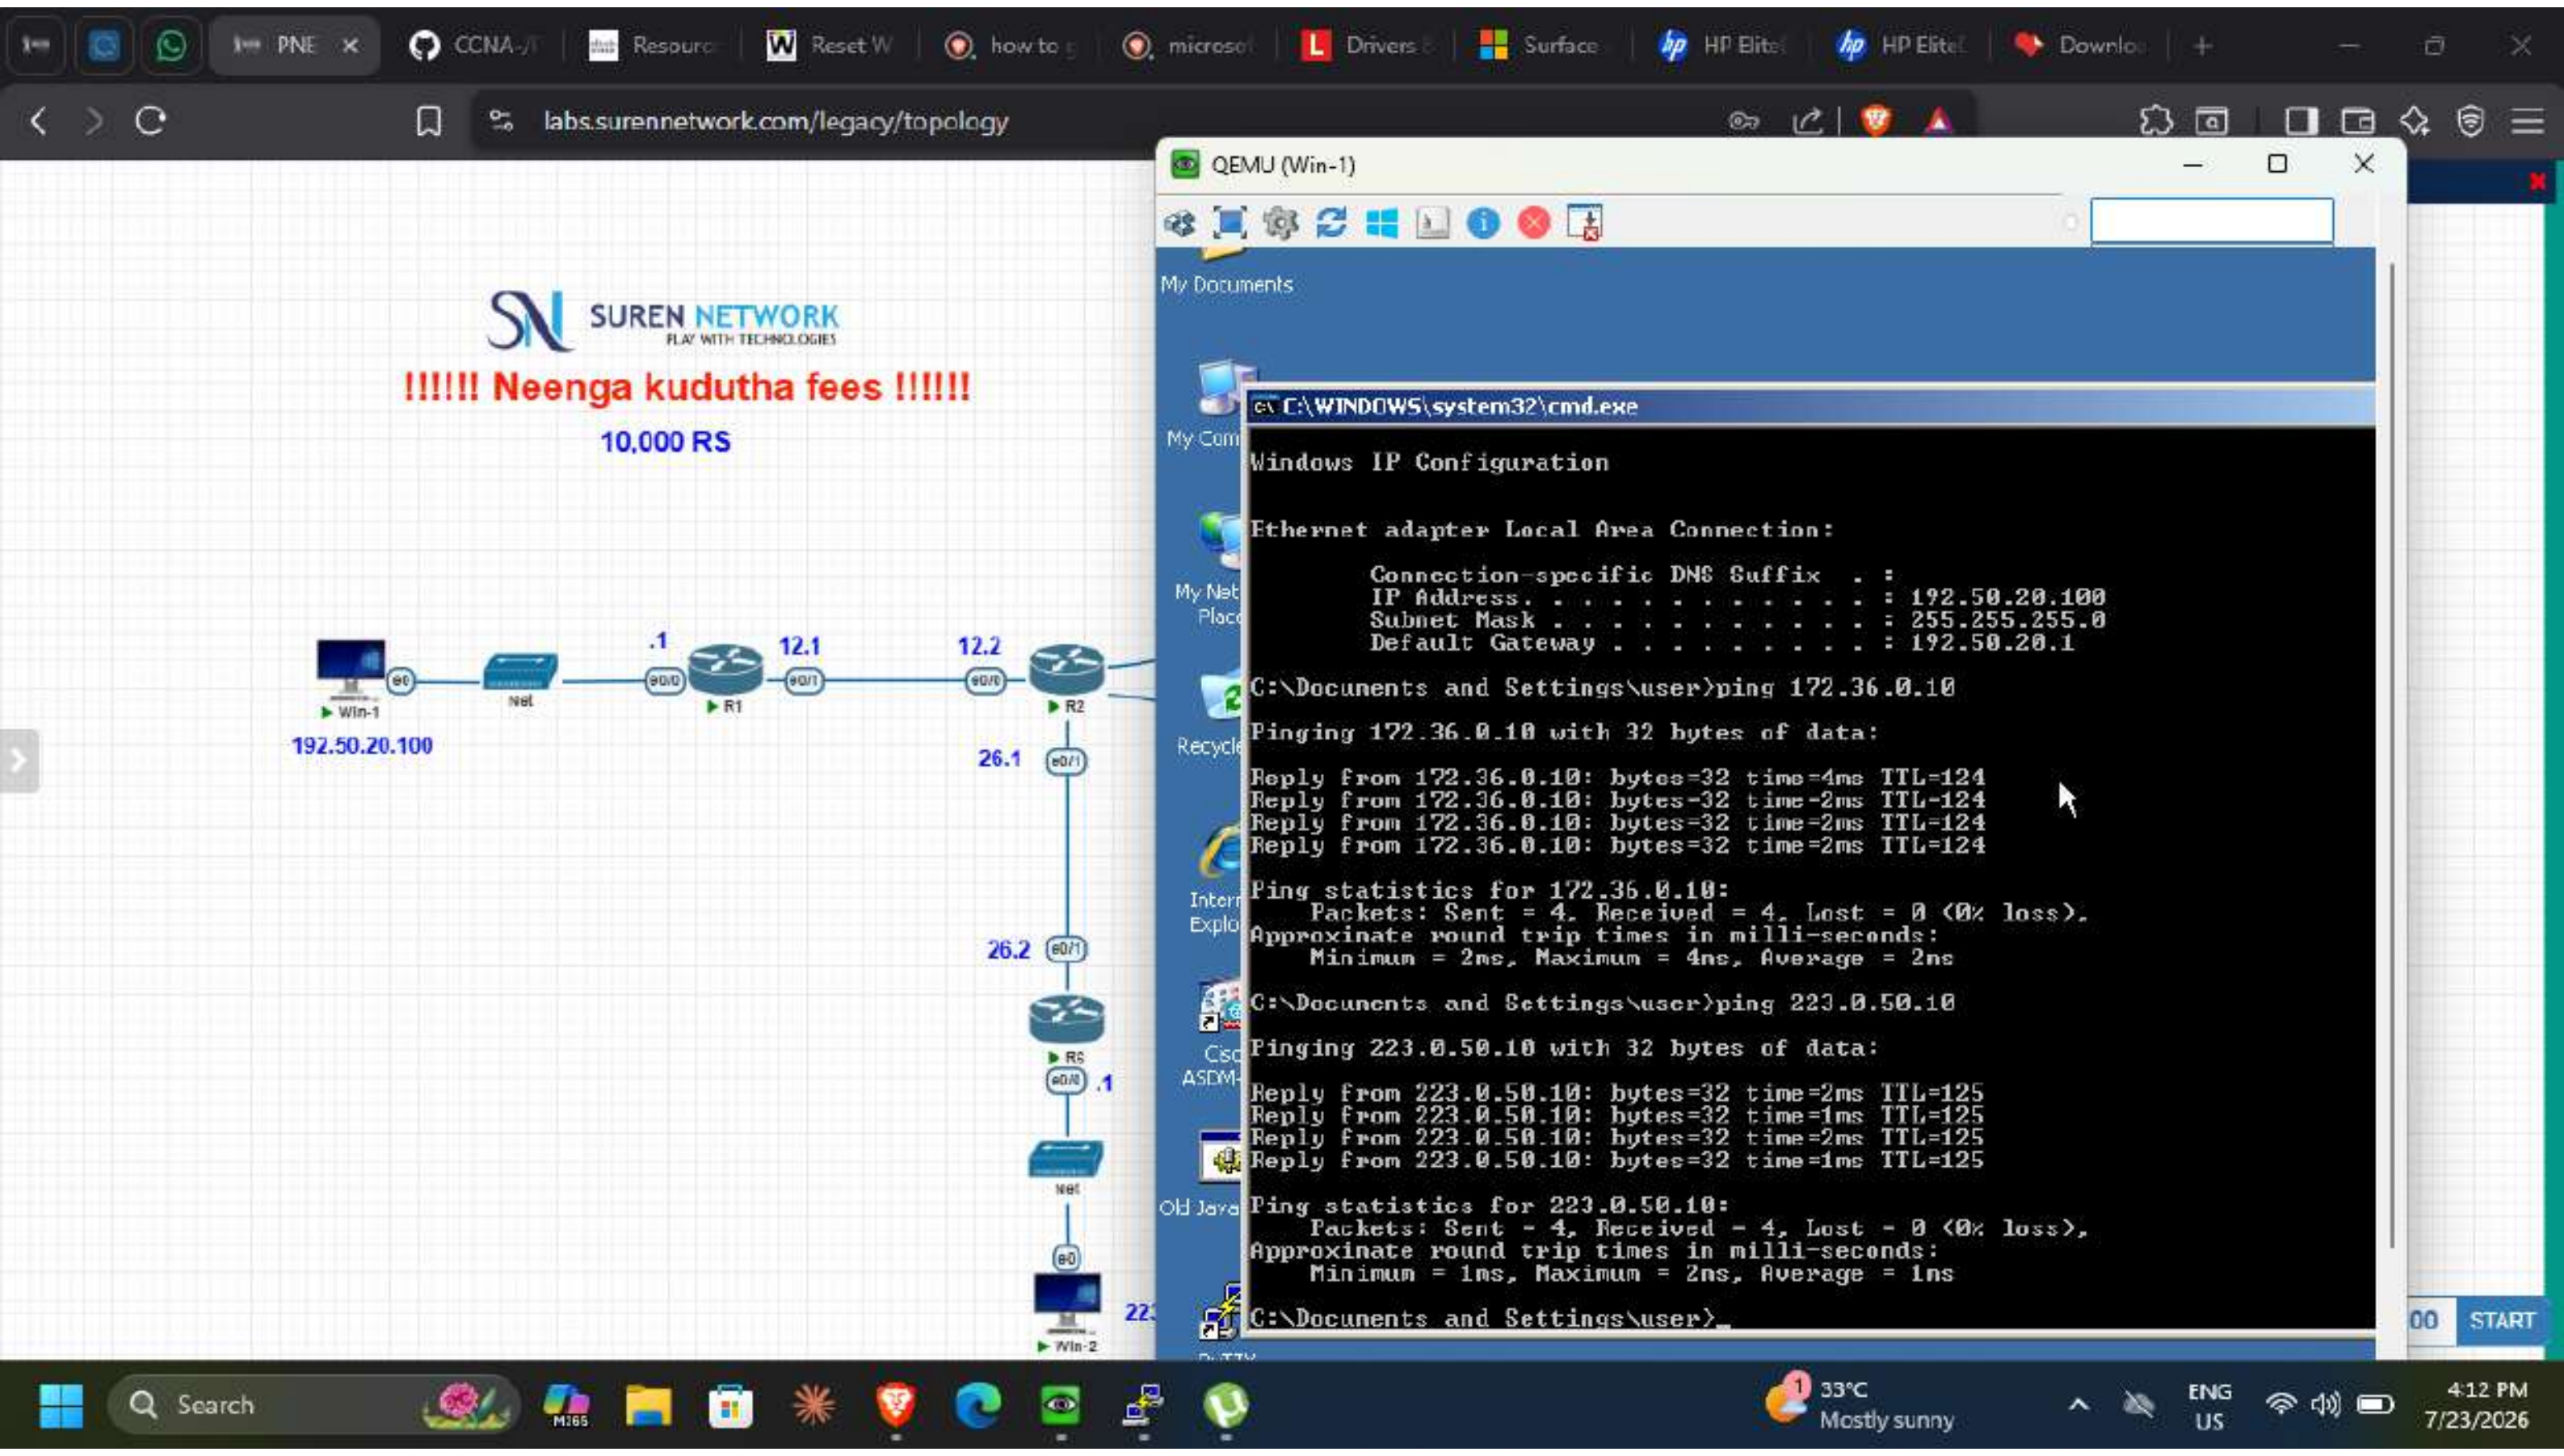
labs.surennetwork.com/legacy/topology
QEMU (Win-1)
SUREN NETWORK
PLAY WITH TECHNOLOGIES
!!!!!! Neenga kudutha fees !!!!!!
10,000 RS
192.50.20.100
Win-1
Net
R1
R2
.1
12.1
12.2
26.1
26.2
e0/0
e0/1
Win-2
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 192.50.20.100
Subnet Mask . . . . : 255.255.255.0
Default Gateway . . . . : 192.50.20.1
C:\Documents and Settings\user>ping 172.36.0.10
Pinging 172.36.0.10 with 32 bytes of data:
Reply from 172.36.0.10: bytes=32 time=4ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 4ms, Average = 2ms
C:\Documents and Settings\user>ping 223.0.50.10
Pinging 223.0.50.10 with 32 bytes of data:
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Ping statistics for 223.0.50.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>_
START
33°C
Mostly sunny
ENG
US
4:12 PM
7/23/2026

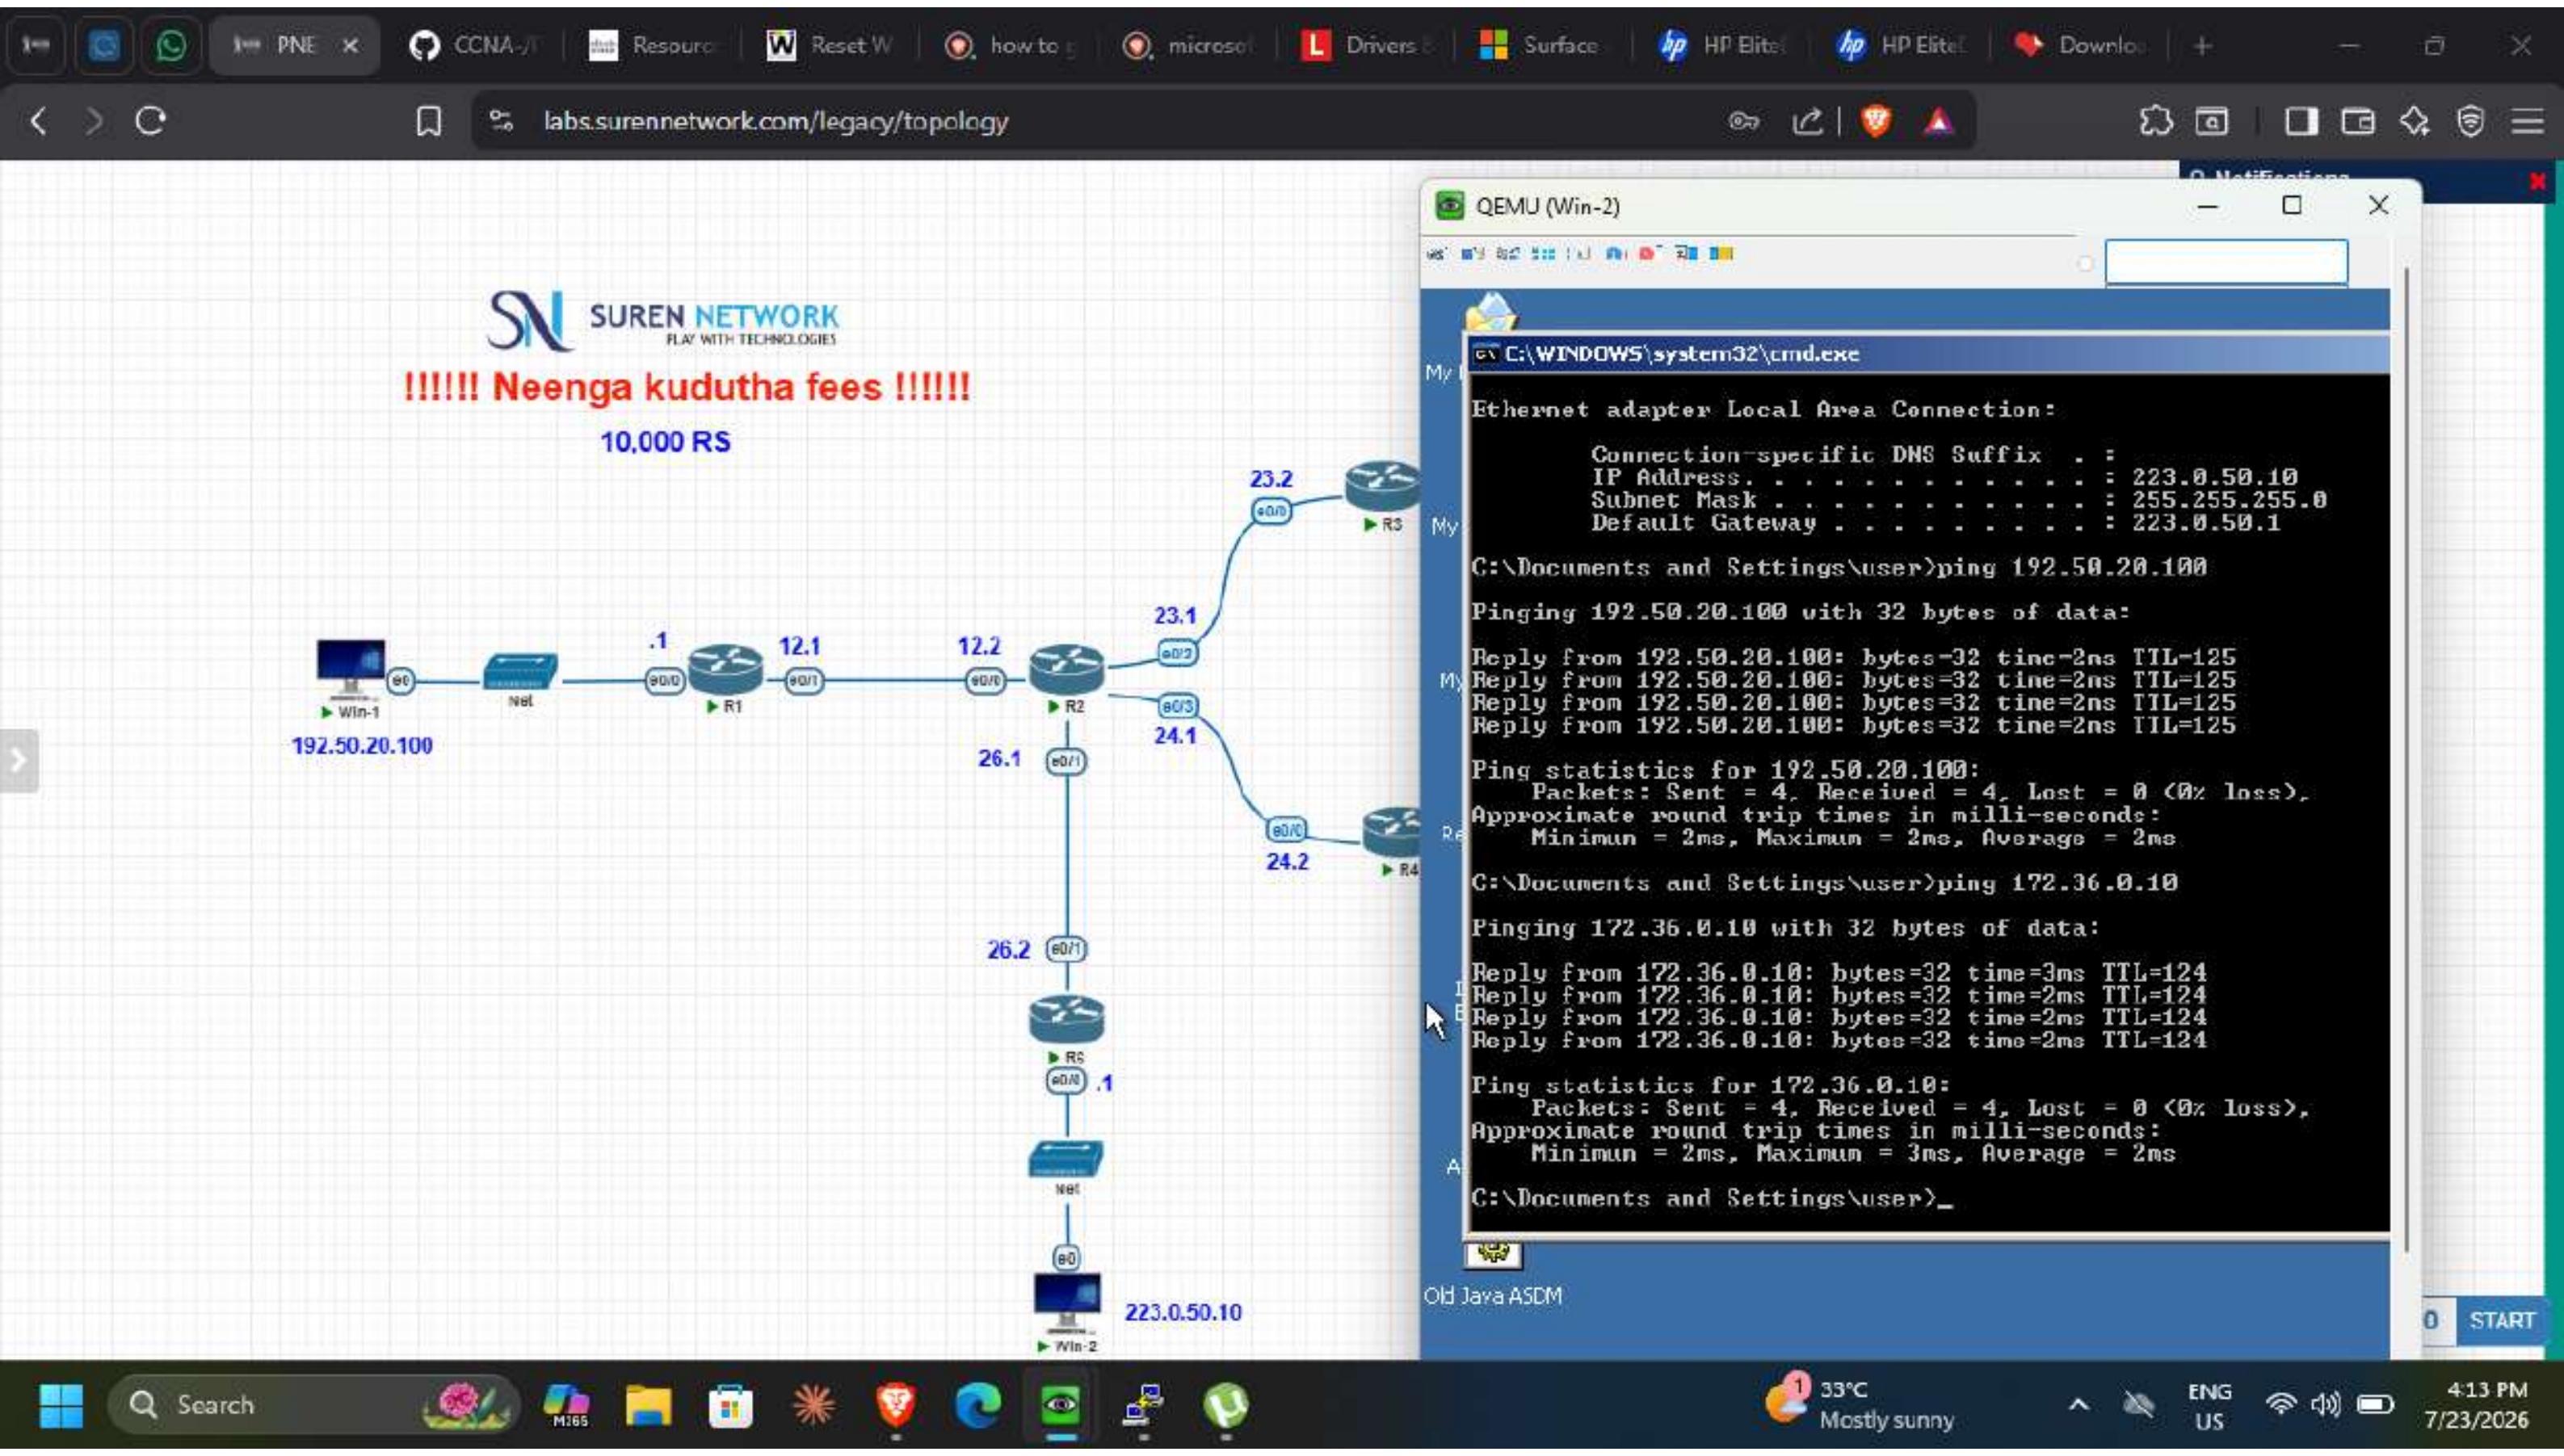

labs.surennetwork.com/legacy/topology
SUREN NETWORK
PLAY WITH TECHNOLOGIES
!!!!!! Neenga kudutha fees !!!!!!
10,000 RS
192.50.20.100
.1
12.1
12.2
23.1
23.2
24.1
24.2
26.1
26.2
.1
223.0.50.10
QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 223.0.50.10
Subnet Mask . . . . : 255.255.255.0
Default Gateway . . . . : 223.0.50.1
C:\Documents and Settings\user>ping 192.50.20.100
Pinging 192.50.20.100 with 32 bytes of data:
Reply from 192.50.20.100: bytes=32 time=2ms TTL=125
Reply from 192.50.20.100: bytes=32 time=2ms TTL=125
Reply from 192.50.20.100: bytes=32 time=2ms TTL=125
Reply from 192.50.20.100: bytes=32 time=2ms TTL=125
Ping statistics for 192.50.20.100:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms
C:\Documents and Settings\user>ping 172.36.0.10
Pinging 172.36.0.10 with 32 bytes of data:
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>_
Old Java ASDM
START
33°C
Mostly sunny
ENG
US
4:13 PM
7/23/2026

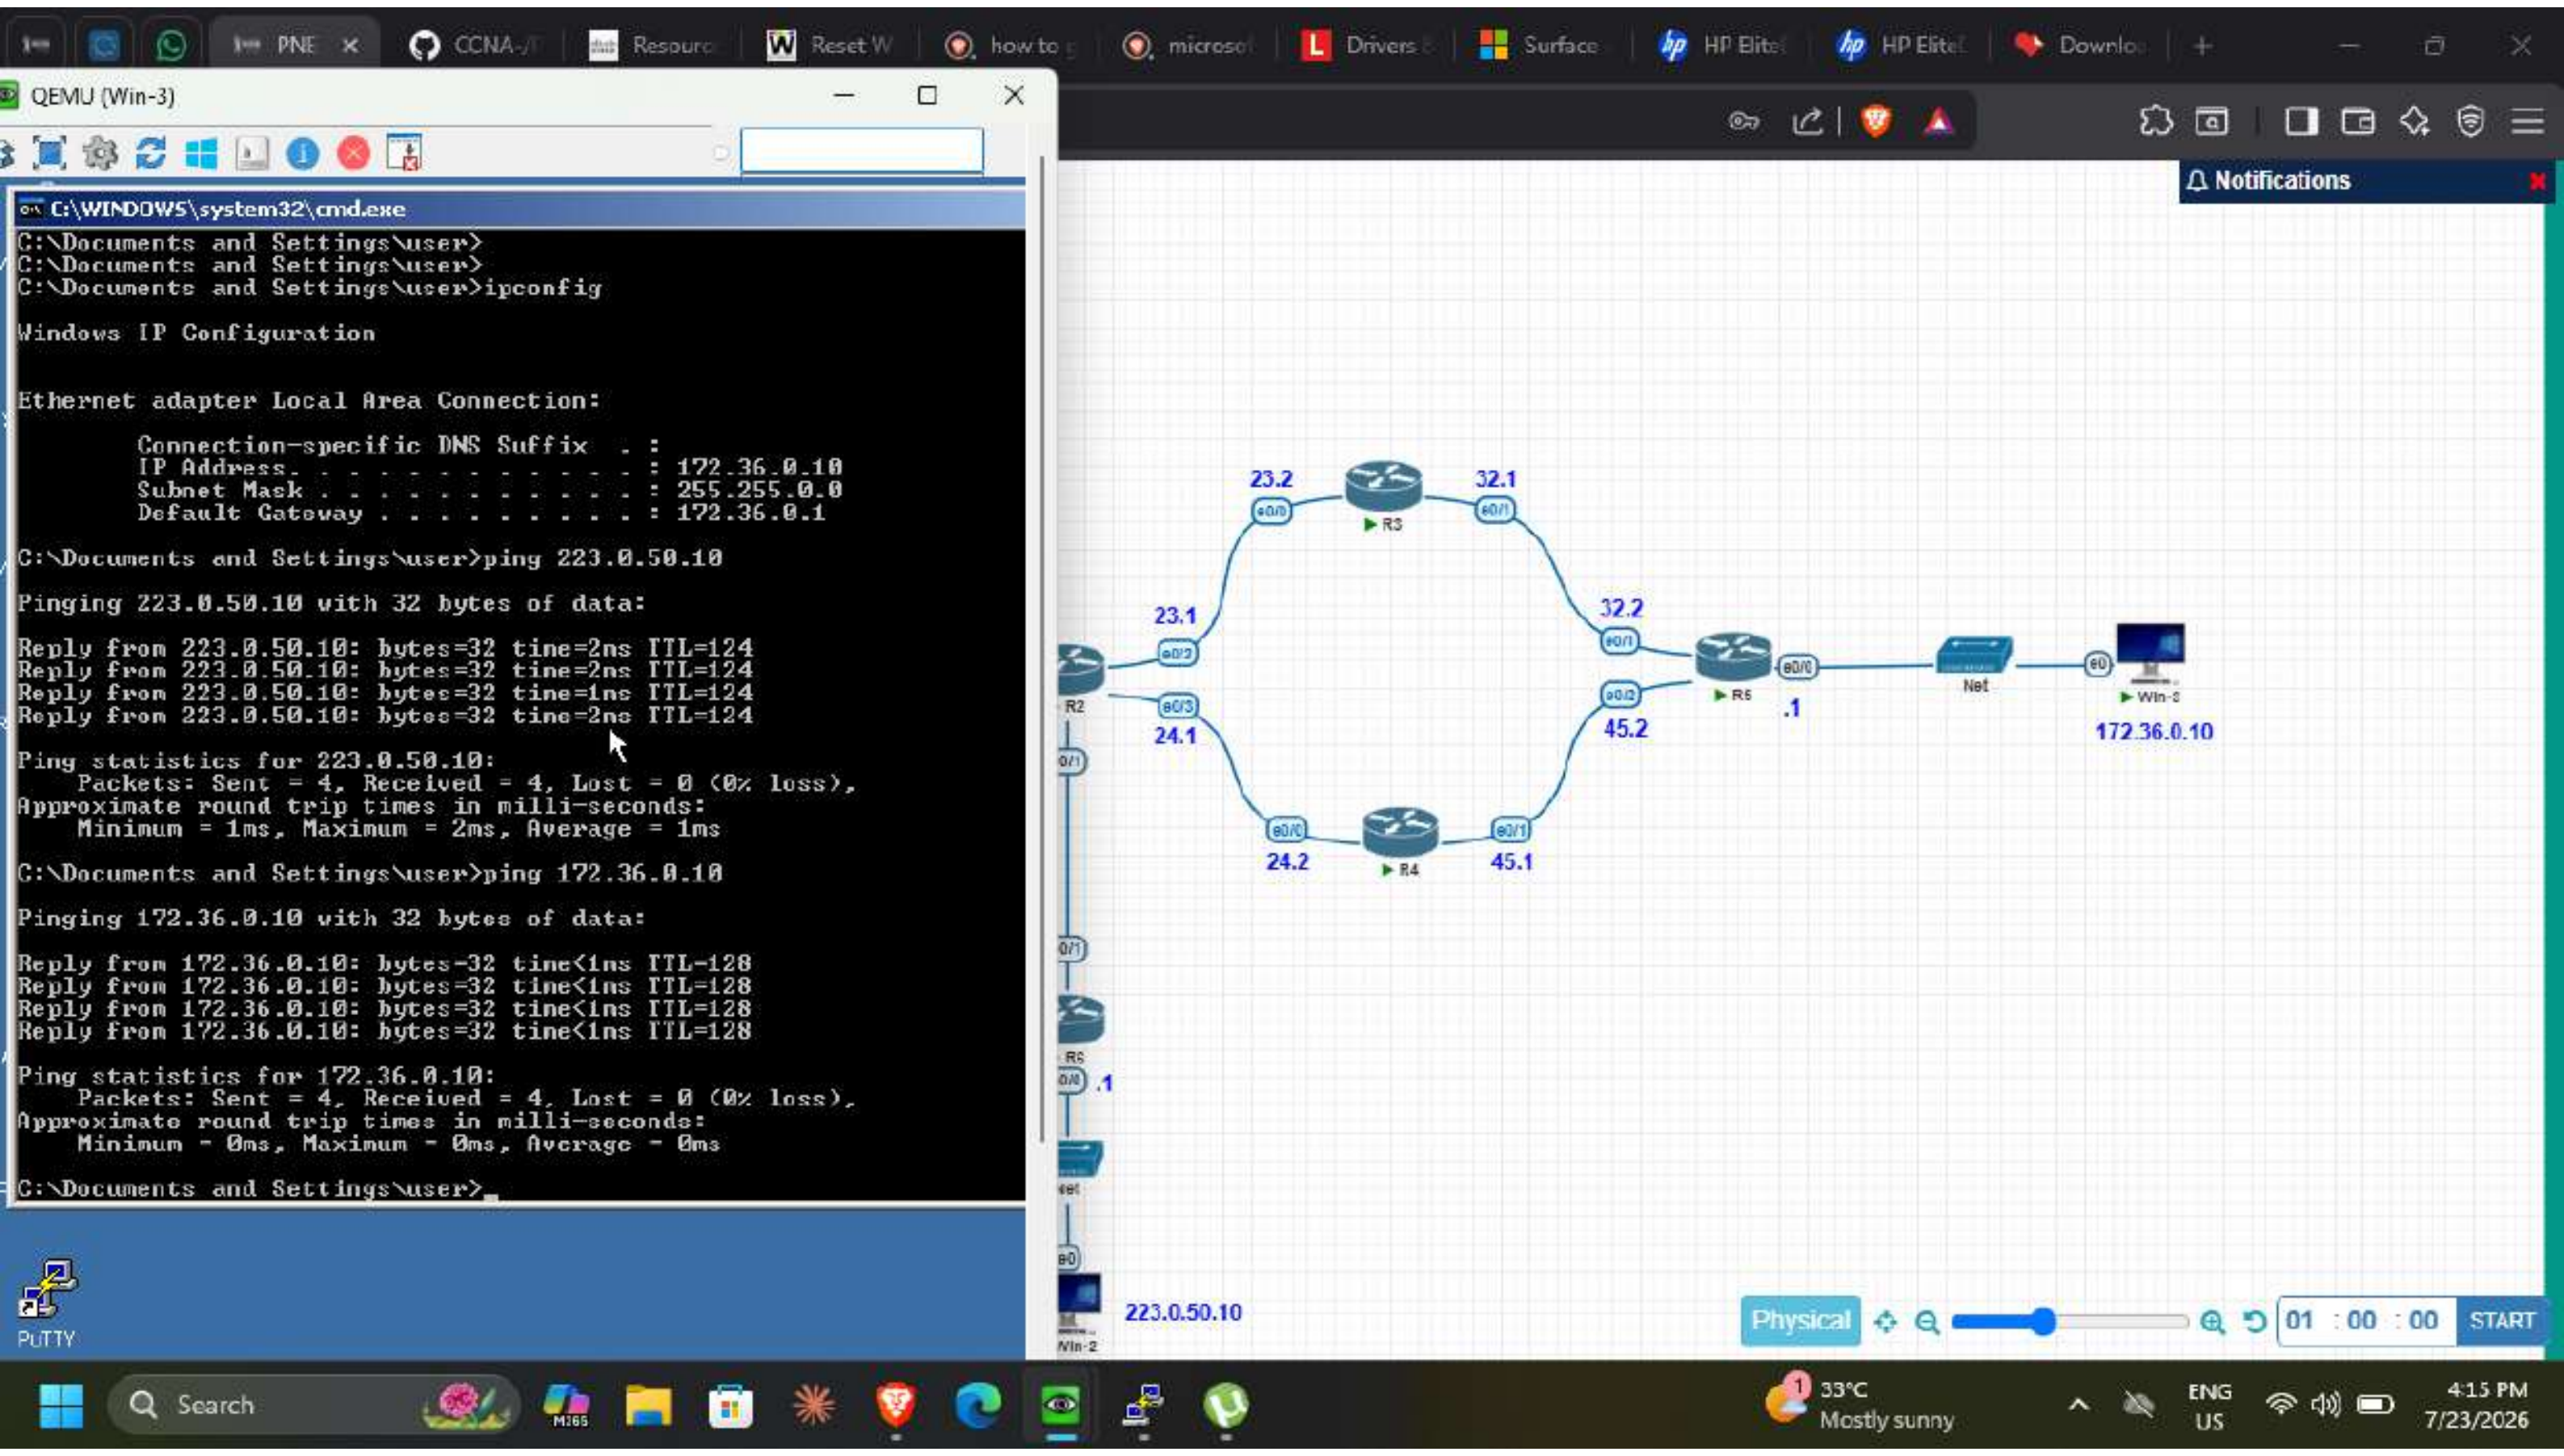
QEMU (Win-3)
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>ipconfig
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 172.36.0.10
Subnet Mask . . . . : 255.255.0.0
Default Gateway . . . . : 172.36.0.1
C:\Documents and Settings\user>ping 223.0.50.10
Pinging 223.0.50.10 with 32 bytes of data:
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Reply from 223.0.50.10: bytes=32 time=1ms TTL=124
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Ping statistics for 223.0.50.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>ping 172.36.0.10
Pinging 172.36.0.10 with 32 bytes of data:
Reply from 172.36.0.10: bytes=32 time<1ms TTL=128
Reply from 172.36.0.10: bytes=32 time<1ms TTL=128
Reply from 172.36.0.10: bytes=32 time<1ms TTL=128
Reply from 172.36.0.10: bytes=32 time<1ms TTL=128
Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Documents and Settings\user>
PuTTY
Notifications
23.2
32.1
R3
23.1
32.2
R2
24.1
45.2
R5
.1
Net
172.36.0.10
24.2
R4
45.1
223.0.50.10
Physical
START
33°C
Mostly sunny
ENG
US
4:15 PM
7/23/2026