


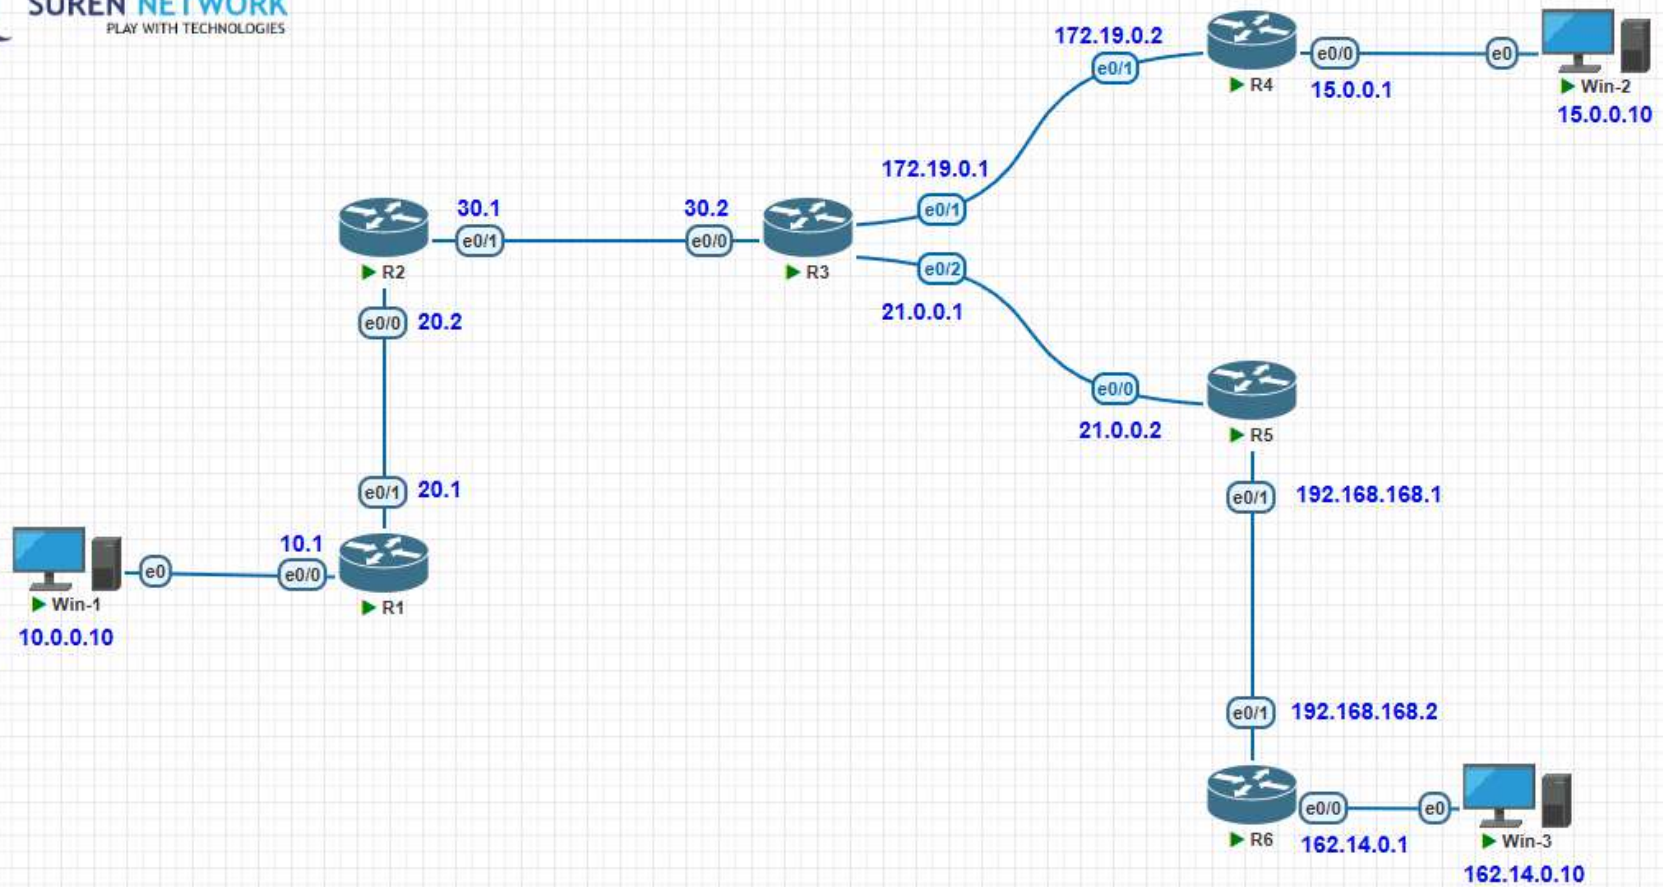

```
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Approximate round trip times in milli-seconds:
  Minimum = 2ms, Maximum = 4ms, Average = 2ms
C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 10.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 10.0.0.1

C:\Documents and Settings\user>ping 15.0.0.10

Pinging 15.0.0.10 with 32 bytes of data:

Reply from 15.0.0.10: bytes=32 time=3ms TTL=124
Reply from 15.0.0.10: bytes=32 time=3ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 15.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
      Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>
```

```
QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 15.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 15.0.0.1

C:\Documents and Settings\user>
```

```
QEMU (Win-3)
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 162.14.0.10
    Subnet Mask . . . . . : 255.255.0.0
    Default Gateway . . . . . : 162.14.0.1

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=4ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
      Minimum = 2ms, Maximum = 4ms, Average = 2ms
C:\Documents and Settings\user>
```



```
QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Approximate round trip times in milli-seconds:
  Minimum = 2ms, Maximum = 4ms, Average = 2ms
C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 10.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 10.0.0.1

C:\Documents and Settings\user>ping 15.0.0.10

Pinging 15.0.0.10 with 32 bytes of data:

Reply from 15.0.0.10: bytes=32 time=3ms TTL=124
Reply from 15.0.0.10: bytes=32 time=3ms TTL=124
Reply from 15.0.0.10: bytes=32 time=1ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 15.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```

```
QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 1ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 15.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 15.0.0.1

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:

Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 162.14.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms

C:\Documents and Settings\user>
```

```
QEMU (Win-3)
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>
C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 162.14.0.10
    Subnet Mask . . . . . : 255.255.0.0
    Default Gateway . . . . . : 162.14.0.1

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=4ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>
```