


2		1	
REVISION	DESCRIPTION	DATE	APPROVED

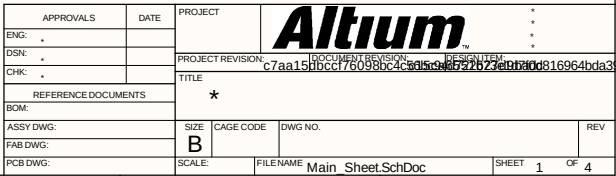

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR
HEREWITH IS THE PROPERTY OF ALTUM LIMITED AND MAY
BE FREELY DISTRIBUTED IN WHOLE. NO RIGHTS ARE
RESERVED OR EXPRESS OR IMPLIED WARANTIE GIVEN.




REVISION	DESCRIPTION	DATE	APPROVED

VOUT1 = 1.8V
VOUT2 = 2.4 V
L1, L2 = 2.2uH, DCR < 400 mΩ, ±20%, 0806

Power Managment

VOUT1 is gonna be used for all
ICs power
VOUT2 is gonna be used LED
power supply


Test points

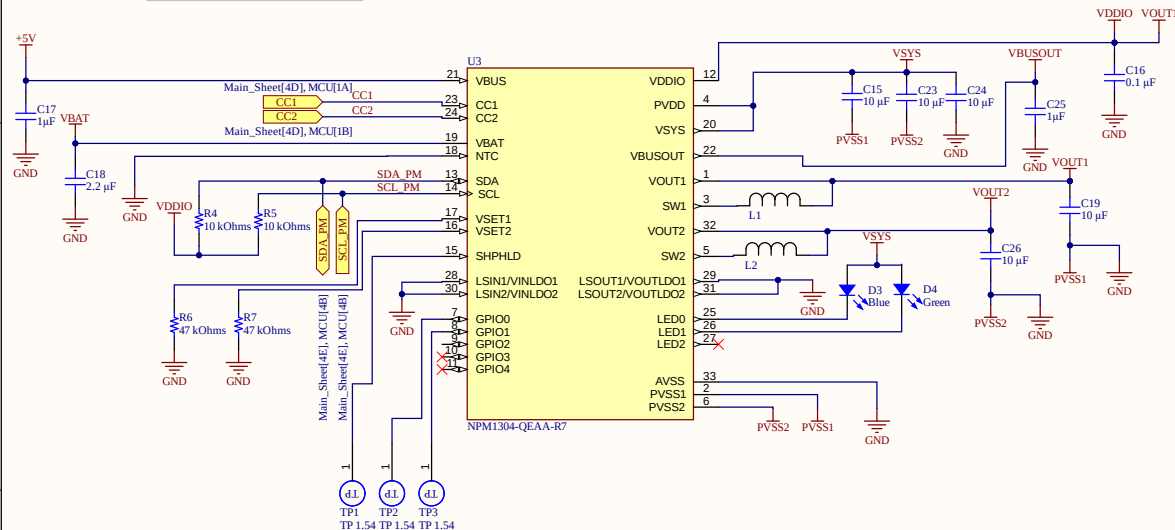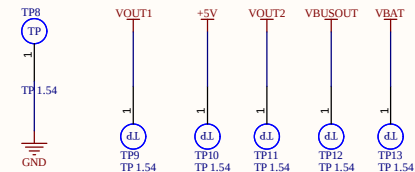


APPROVALS	DATE	PROJECT	Altium	
ENG: *				
DSN: *		PROJECT REVISION:	DOCUMENT REVISION:	DESIGN ID:
CHK: *				
REFERENCE DOCUMENTS		TITLE		
BOM:		*		
ASSY DWG:	SIZE	CAGE CODE	DWG NO.	REV
FAB DWG:	A3			
PCB DWG:	SCALE:	FILE NAME	Power.SchDoc	SHEET 2 OF 4

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS THE PROPERTY OF ALTUM LIMITED AND MAY BE FREELY DISTRIBUTED IN WHOLE. NO RIGHTS ARE RESERVED OR EXPRESS OR IMPLIED WARANTIE GIVEN.

Accelerometer - Step counter

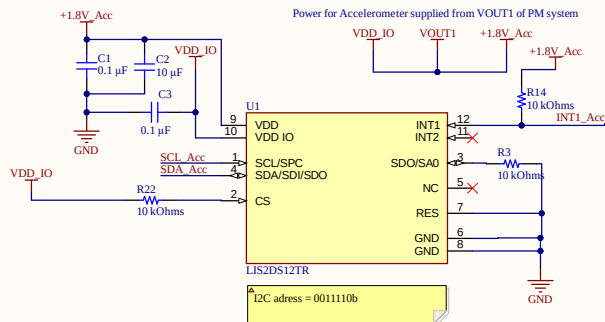

LED for PPG

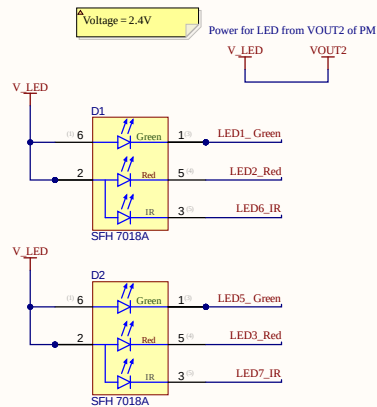


Power for Analog interface supplied from VOUT1 of PM system


PPG&EDA interface

Analog interface (AI)


Device address for write R 1010 1010b (AAh)
Device address for read R 1010 1011b (ABh)

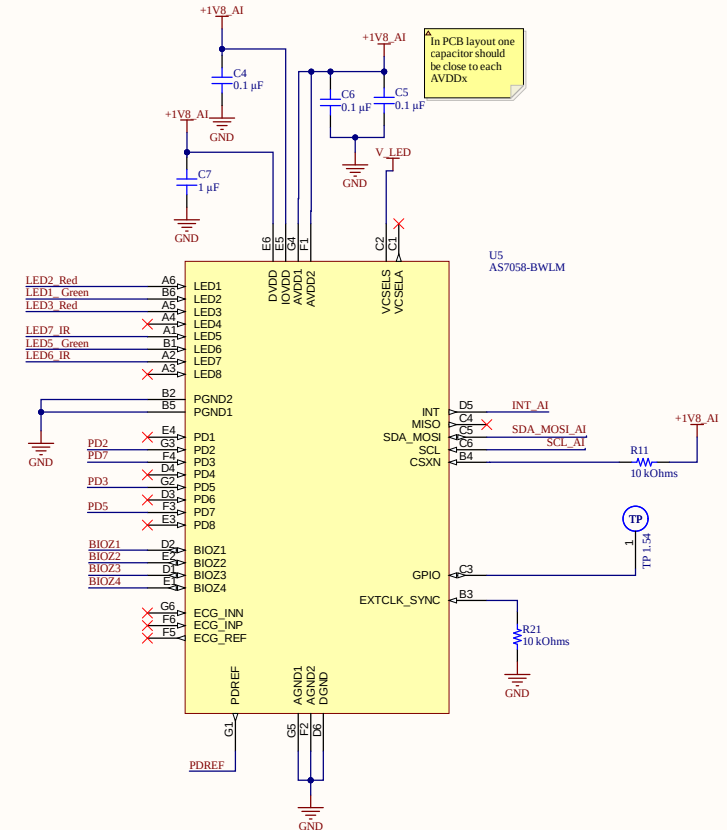


Photodiode for PPG

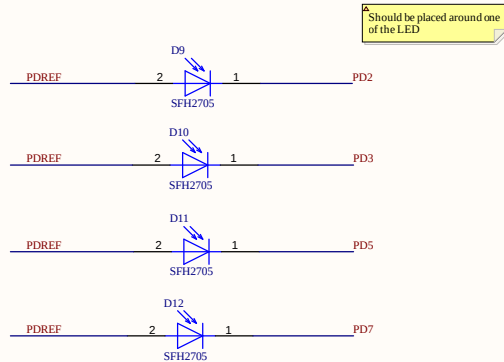

Contacts for EDA

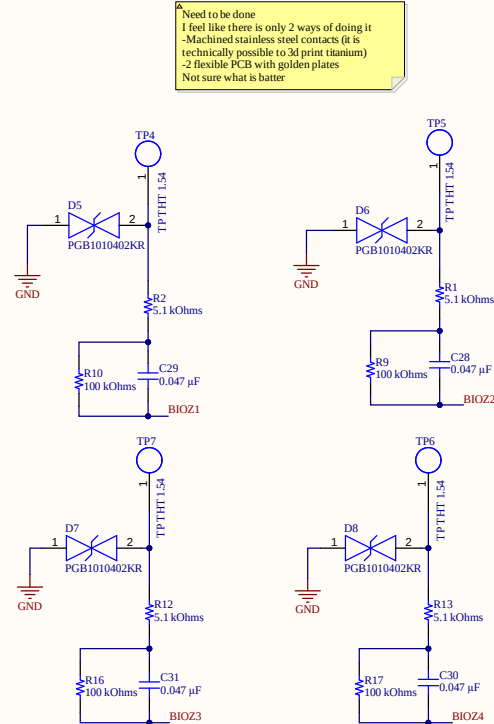

I2C and INT port for MCU

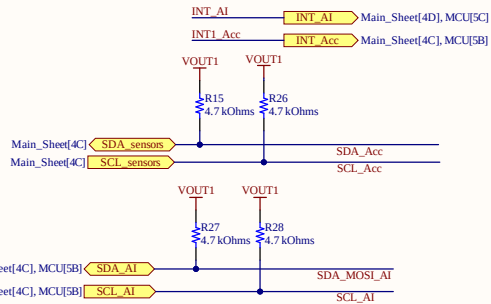


APPROVALS		DATE	PROJECT	Altium	
ENG:				DOCUMENT REVISION:	DESIGN ITEM
DSN:				PROJECT REVISION:	
CHK:				TITLE	
REFERENCE DOCUMENTS					
BOM:					
ASSY DWG:					
FAB DWG:					
PCB DWG:					
SIZE	CAGE CODE	DWG NO.	REV		
A3					
SCALE:	FILE NAME	Sensors.SchDoc	SHEET	3	OF 4


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS THE PROPERTY OF ALTUM LIMITED AND MAY BE FREELY DISTRIBUTED IN WHOLE. NO RIGHTS ARE RESERVED OR EXPRESS OR IMPLIED WARRANTY GIVEN.

REVISION	DESCRIPTION	DATE	APPROVED


USB

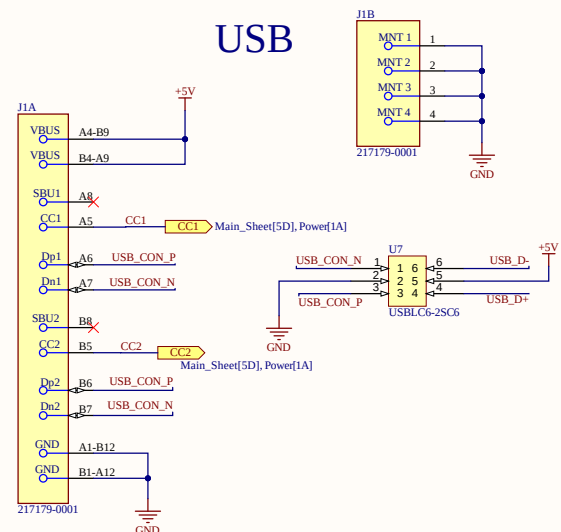


MCU

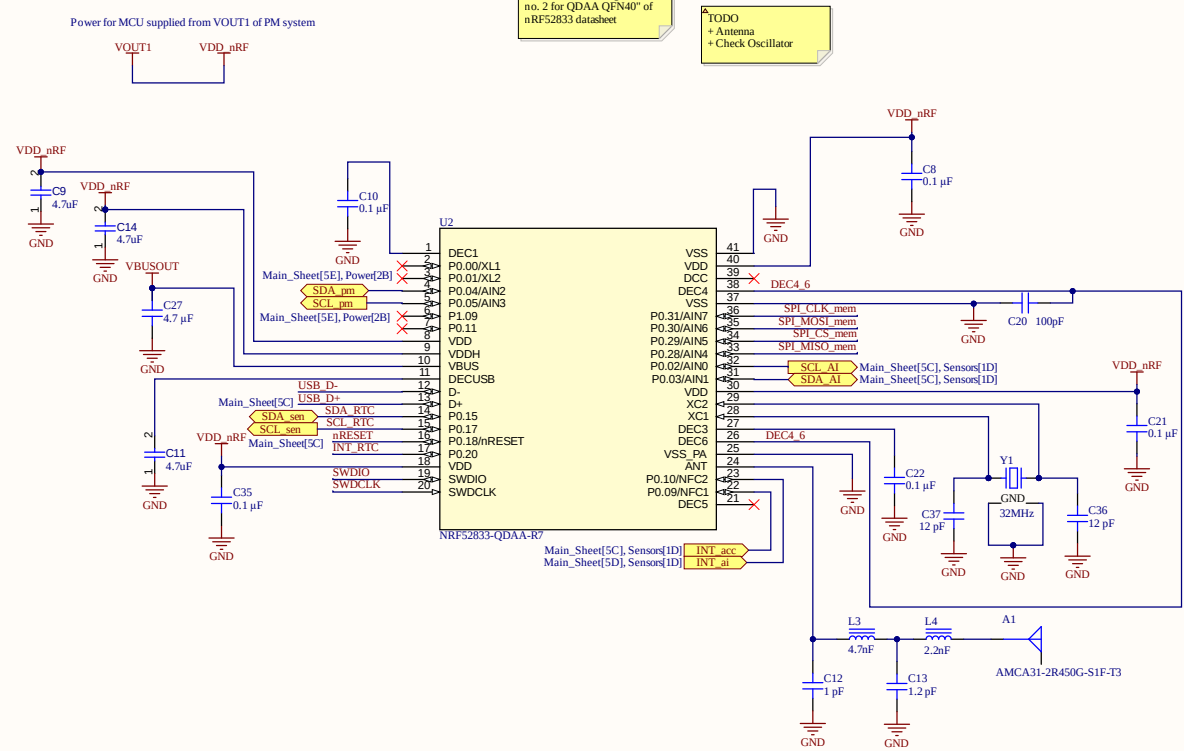


SWD




Reset



Memory

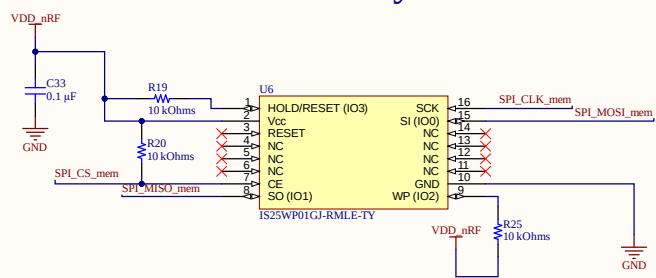


RTC

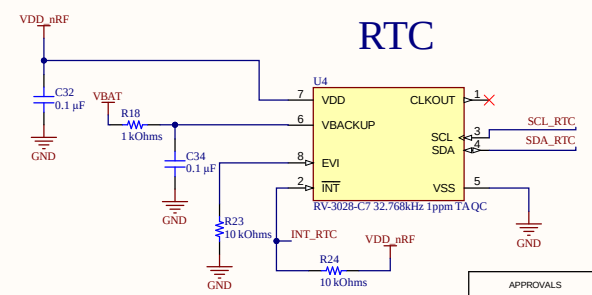

I2C, RTC address = 1010010xb
x = 1 -> Read
x = 0 -> Write
I2C pins connected to the same pins as sensors I2C, so no need in pull-up resistors

APPROVALS		DATE	PROJECT		Altium		* 	
-----------	--	------	---------	--	-------------------	--	--	--

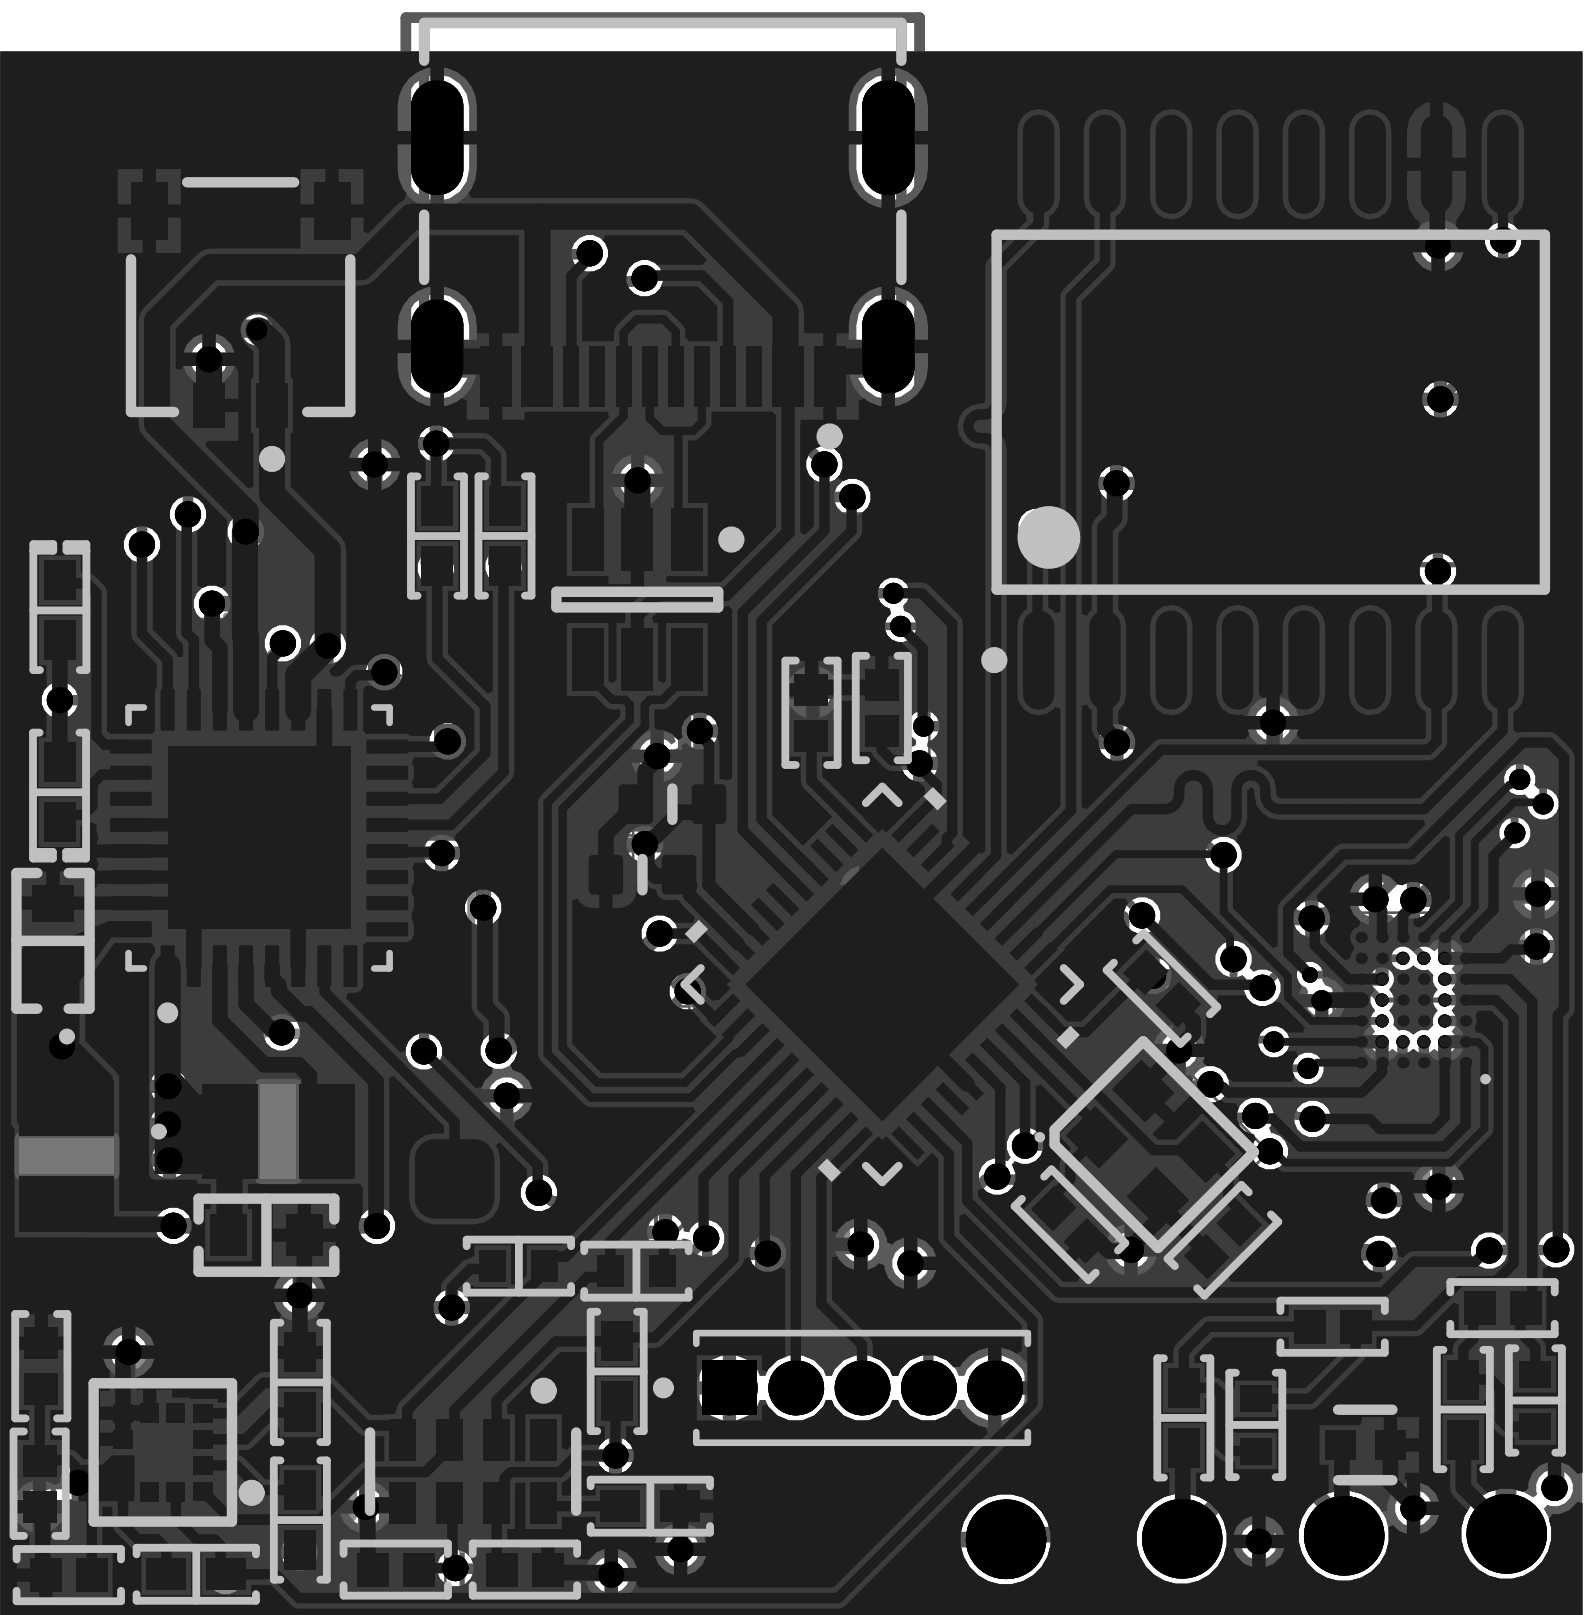

L2 L2 L2

Board Stack Report