

**SPECIFICATION**

Current Rate:3 AMP

Insulation Resistance:1000M  $\Omega$  Min.Contact Resistance:20m  $\Omega$  Max.

Dielectric voltage:1000V AC for one minute


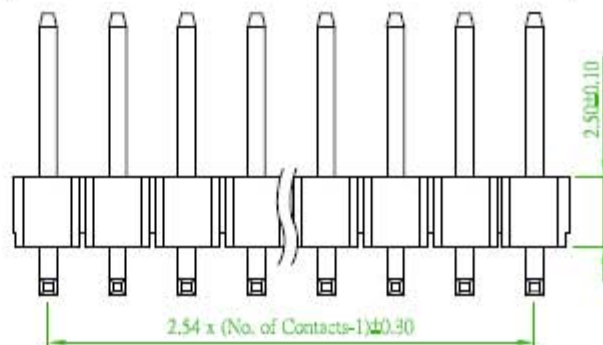
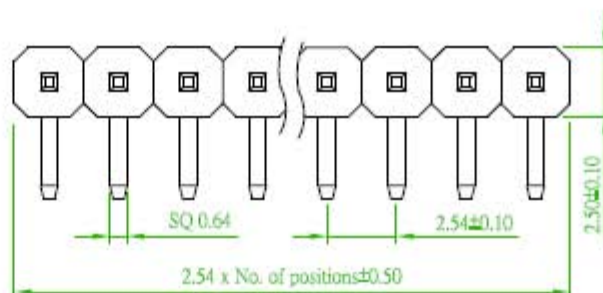
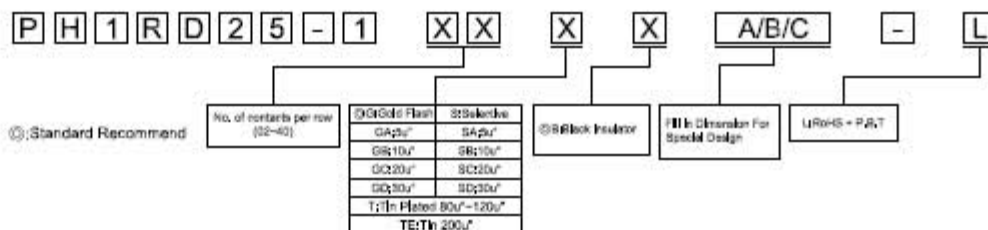
Operation Temperature:-40°C to +105°C

**MATERIAL**

Insulator:Polyester,UL 94V-0◎Standard:P.B.T

Contact Pin:Copper Alloy

Tin,Gold plated◎Standard:Gold flash all over

**ORDER INFORMATION**Recommended PCB Layout  
(PCB TOLERANCE  $\pm 0.05$ )

AREA	REV.	DESCRIPTION	DATE

品名 TITLE	PIN HEADER 2.54mm RIGHT ANGLE TYPE PLASTIC HEIGHT 2.5mm			
品號 PART NO.	PH1RD25-1XX-L			日期 DATE
圖號 DRAWING NO.	PH1RD25-1XX-L	版本 REV.	A	繪圖 DRAWN
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED
公差 TOLERANCE	X $\pm 0.35$ XX $\pm 0.25$	單位 UNIT	mm	核准 APPROVED