



P0V 3D v3 — frame_B_v3 顶轴承架 B（上层架，×1）

殼 $\varnothing 44$ / 臂 18 宽 $\times$ 8 厚 $\times 2$ (0°/90° L 形) / 臂底筋 4 $\times$ 8 / 垫柱 $\varnothing 18\times 16$ @POST_R 106.07 / 688 压入窝 $\varnothing 15.8\times 5 + \varnothing 13$ 台肩通孔 / 4 $\times \varnothing 3.2$ @R14 45°+90k° / 翻转姿态打印零支撑 (STL 已是打印姿态, 轴承窝朝上) / 2026-07-24 ang=90 臂筋带 2 $\times \varnothing 3.2$ 挡光滑片挂孔 (M3 $\times$ 20+螺母, 滑片刀片印长 50 装机剪短) / PLA (GB 1st-angle, 主视 2:1 / 俯视 1:1 / 放大 2.5:1, mm)

主视图 (从 -Y 视向, 2:1)

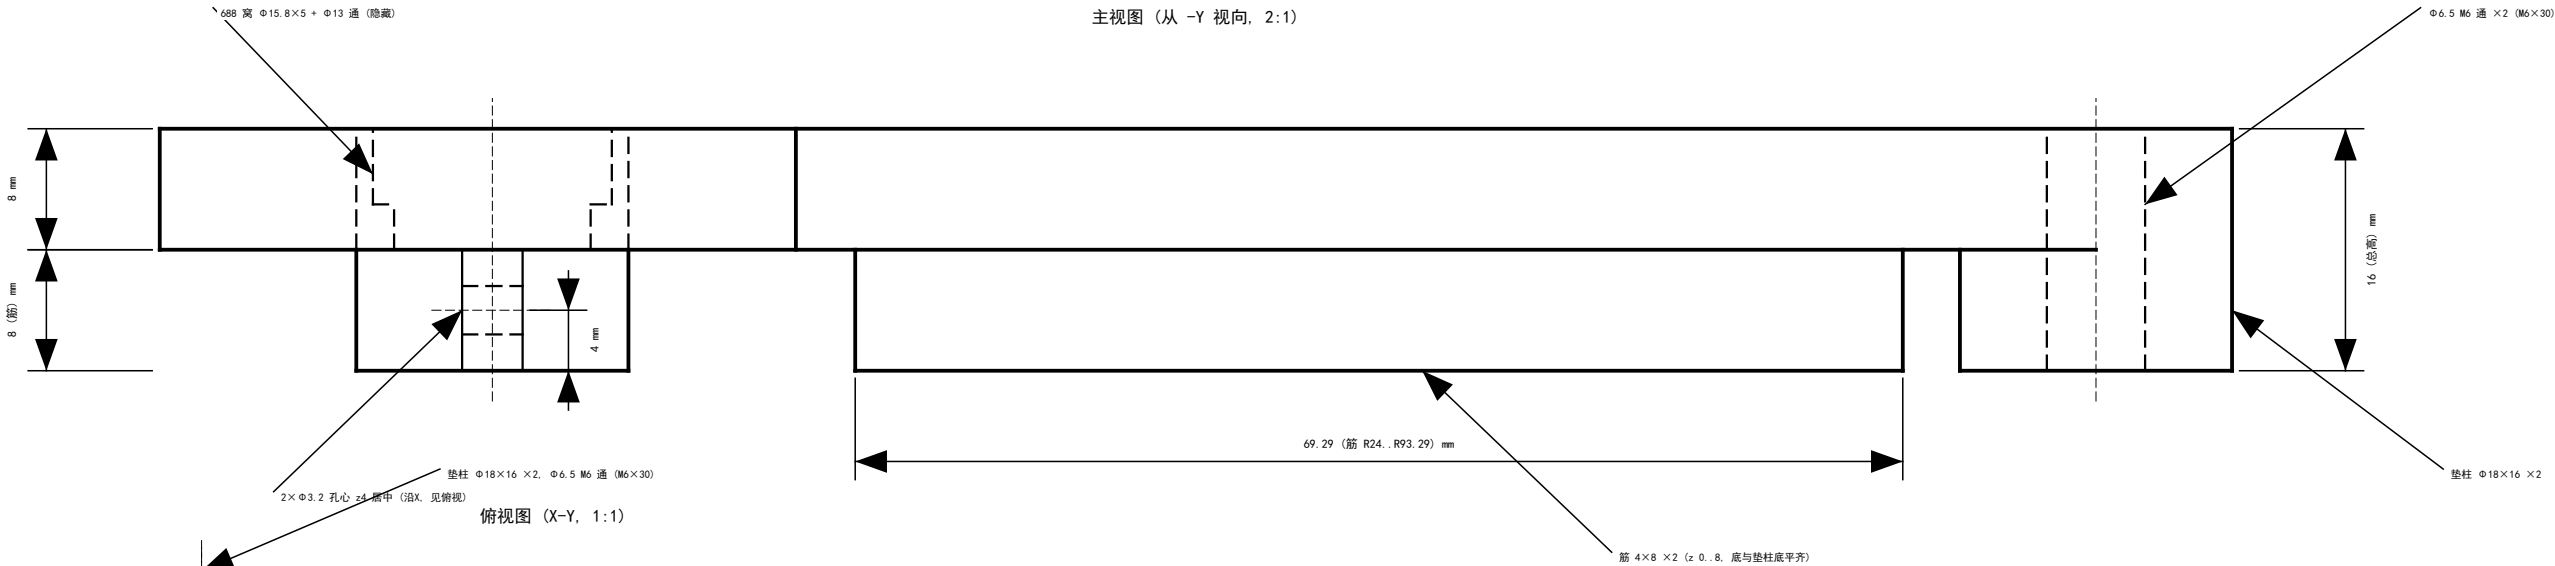

俯视图 (X-Y, 1:1)

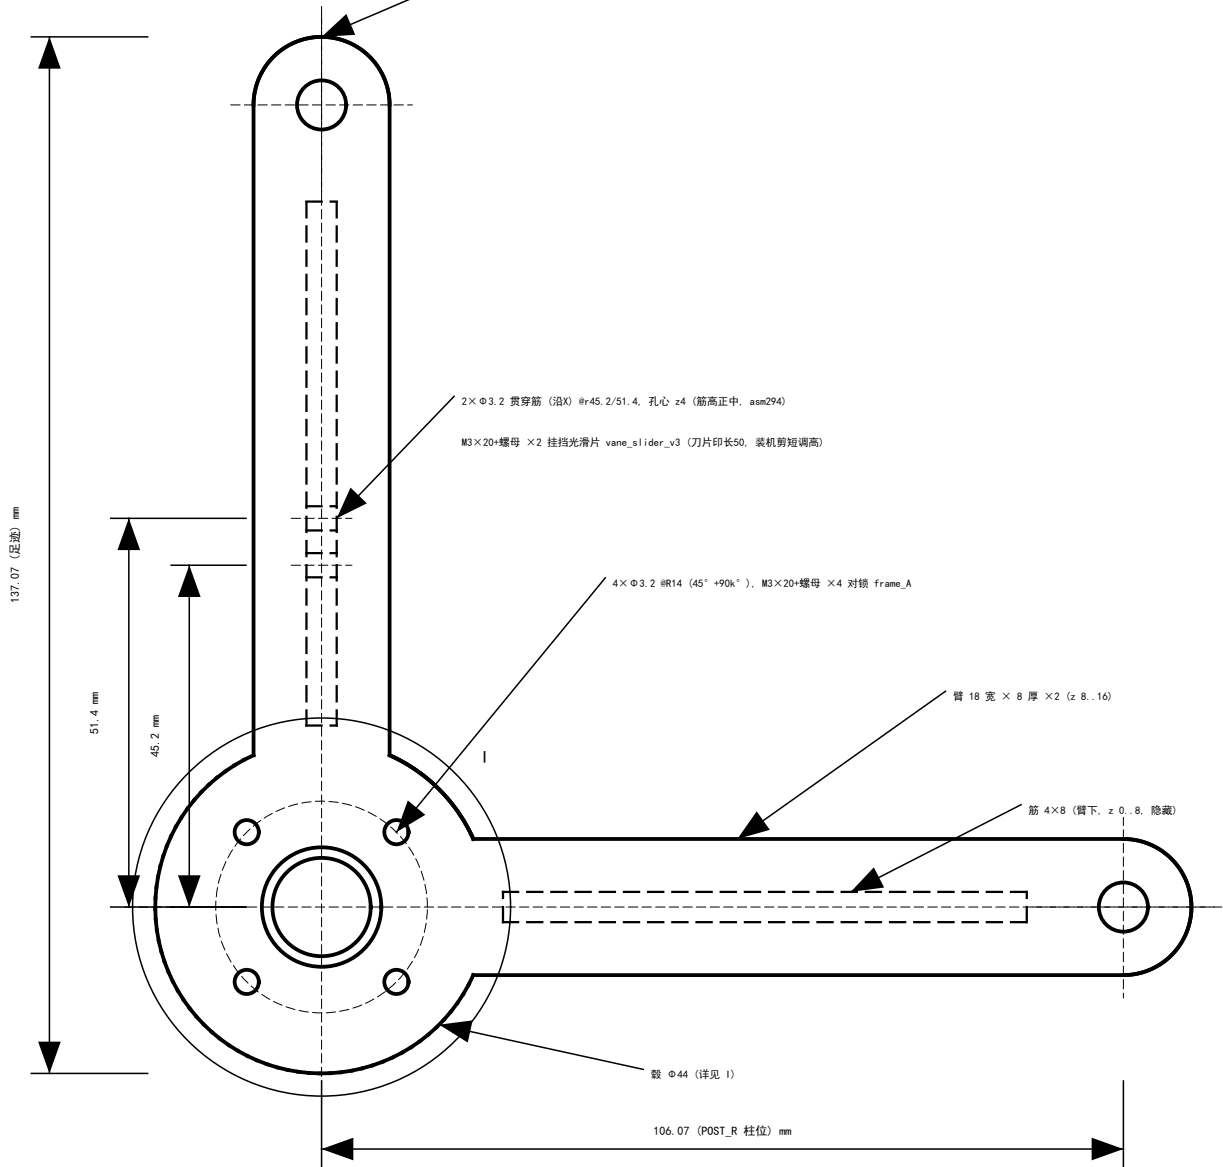

局部放大 I (毂, 俯视 2.5:1)

