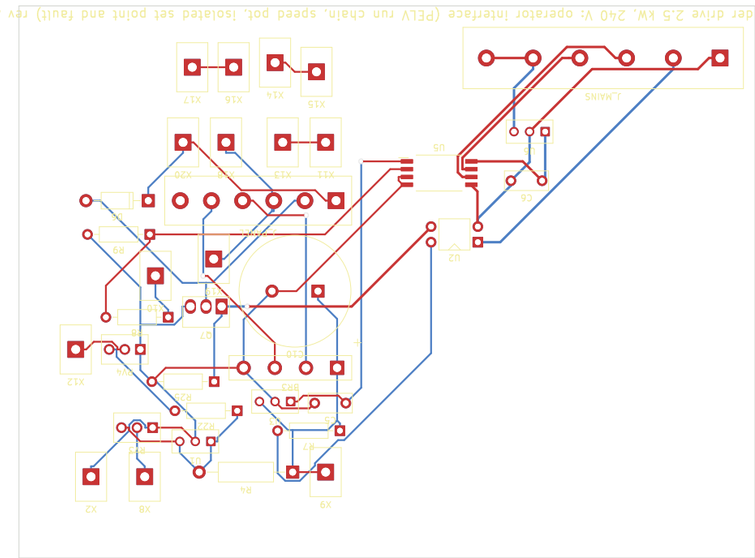

der drive 2.5 kW, 240 V: operator interface (PELV run chain, speed pot, isolated set point and fault) rev A