



**NTNU – Trondheim**  
Norwegian University of  
Science and Technology

Title

**Kjetil Hope Sørbo**

Submission date: December 2015  
Responsible professor: Thor Inge Fossen, Tor Arne Johansen  
Supervisor: Firstname Lastname, Affiliation

Norwegian University of Science and Technology  
Department of Telematics



## Abstract

Abstract



## Preface



# Contents

<b>List of Figures</b>	<b>ix</b>
<b>List of Tables</b>	<b>xi</b>
<b>List of Acronyms</b>	<b>xv</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Background and motivation . . . . .	1
1.2 Previous work . . . . .	2
1.3 Goal of thesis . . . . .	3
1.4 System layout . . . . .	3
1.5 Layout of thesis . . . . .	4
<b>2 Reference frames</b>	<b>7</b>
2.1 ECI . . . . .	7
2.2 ECEF . . . . .	7
2.3 NED and ENU . . . . .	8
<b>3 Real time kinematic GNSS</b>	<b>9</b>
3.1 GNSS constelations . . . . .	9
3.2 GPS signals . . . . .	9
3.3 Error sources . . . . .	11
3.3.1 Clock error . . . . .	11
3.3.2 Ionospheric and Trophospheric Delays . . . . .	11
3.3.3 Ephemeris Errors . . . . .	12
3.3.4 Multipath . . . . .	12
3.4 Differential GPS . . . . .	12
3.4.1 Interger Ambiguity Resolution . . . . .	12
3.4.2 Error mitigation in DGPS . . . . .	12
3.4.3 RTK GPS . . . . .	13
3.5 Interger Ambiguity Resolution . . . . .	13
3.5.1 Search space minimization strategies . . . . .	13

<b>4</b>	<b>System Components</b>	<b>15</b>
4.1	Software . . . . .	15
4.1.1	GLUED . . . . .	15
4.1.2	Dune . . . . .	15
4.1.3	IMC . . . . .	16
4.1.4	Netpus . . . . .	16
4.1.5	RTKLIB . . . . .	16
4.2	Physical system . . . . .	18
4.2.1	Beaglebone . . . . .	18
4.2.2	The GPS receiver . . . . .	18
<b>5</b>	<b>Implementation</b>	<b>19</b>
5.1	Software implementation . . . . .	19
5.1.1	Rtklib . . . . .	19
5.2	Hardware implementation . . . . .	20
<b>6</b>	<b>Experimental testing</b>	<b>21</b>
6.1	Physical testing . . . . .	21
6.1.1	Fly test . . . . .	21
6.1.2	GPS test . . . . .	21
<b>7</b>	<b>Conclusion and Discussion</b>	<b>23</b>
7.1	Further work . . . . .	23
	<b>References</b>	<b>25</b>



# List of Figures

1.1	The structure of the autonomos landing system . . . . .	4
4.1	The communication structure of rtklib . . . . .	16



# List of Tables

4.1 Table 1. . . . . 17







# List of Acronyms

**DGPS** Differential GPS.

**ECEF** Earth-Centered-Earth Fixed.

**ECI** Earth-Centered-Inertial.

**ENU** East North Up.

**GNSS** Global Navigation Satellite System.

**GPS** Global Positioning System.

**NED** North East Down.

**NTNU** Norwegian University of Science and Technology.

**RTK-GPS** Real Time Kinematic GPS.

**UAV** Unmanned Aerial Vehicle.





# Chapter 1

## Introduction

### 1.1 Background and motivation

Unmanned aerial vehicles have in seen an increase usage in the civilian sector on land, where they can be used at a cheaper price then manned aircraft. UAV are well suited for tasks like inspections, aerial photography, environment surveillance and search and rescue. Today UAV are mostly operated over land, but in the future this will include the out at sea as well. This will give some challenges that must be overcome. One of these challenges is that the UAV should be able to perform a autonomous landing.

A UAV can increase performance in many maritime operation where today only other manned aircraft or satellites are the only solution. In the maritime sector they can be used in iceberg management, monitoring of oil spills, search and rescue and maritime traffic monitoring. To enable a safe UAV operation at sea there must be a system in place to ensure a safe landing.

There exist landing system that can guide the UAV towards a net, but they are expensive and restricted to a few UAVs. A pilot could always land the UAV, but it would be better if the UAV could hit the net by it self. In order to make the UAV able to perform a automatic landing the minimum requirement is that it know where it is at all time. This put a requirement of the position sensor. The position system need to combine low cost with high position accuracy. This thesis will test a new generation of GNSS receiver, and use GPS to find the position to the UAV. The demand on the accuracy is that the error must be in decimetres to ensure safe landing in the net.

A automatic landing system must include a path planner, guidance system and a accurate position estimation system, in addition to the low level control system

in the UAV. A path planner and guidance system were created in a master thesis at the uavlab by Marcus Frølich. The guidance system is currently under further development in two project thesis. A position system was created by Bjørn Spockeli, but it concluded that the GNSS receiver used were insufficient to perform automatic landing. This thesis will continue the research done by Spockeli, and introduce a new GNSS receiver that will be used with the open source program, rtklib. The motivation is to have a system with accurate local position estimate, such that in the future a landing can be performed automatic. The automatic landing system will use RTK GPS for position estimation. Motivation for work: Autonomos landing. Required accurate posisioning system, a feasable path, tuned guidance system, robust lav nivå kontroll. Include a system figure can give the reader information on how the autolanding system should work, and why this thesis is relevant.

## 1.2 Previous work

Citation checking [Frølich, 2015, Spockeli, 2015] or Frølich [2015], Spockeli [2015] or Frølich [2015], Spockeli [2015]

GNSS navigation has been As part of the NTNU MSc thesis of [Skulstad and Syversen, 2014] they successfully demonstrated a net landing with a fixed wing UAV using a low-cost RTK GNSS system. More about how they did it.

An other NTNU MSc thesis by [Spockeli, 2015] simulated a net landing with a fixed wing UAV. Here the net was allowed to be dynamical, and the system was design with landing on a ship in mind. The system used artificial neural network to estimate the position of the net.

As part of the Stellenbosch University MSc thesis [Smit, 2013] demostraded a autonomous landing on a airfield using decoupled linear controllers and DGPS.

An other vision [Kim et al., 2013]

The uavlab at NTNU has in the last year studied how to perform a autonomous landing with a fixed wing UAV. Automatic landing of a UAV in a net using low-cost single frequency gps is described in [Skulstad and Syversen, 2014], and a path generation system that is integrated with neptus is described in [Frølich, 2015]. Research on RTK GPS intergration in Dune is described in [Spockeli, 2015].

Work done on ambiguity Blewitt [1989], P.J.G Teunissen and Tiberius [1995], Teunissen [1994, 1995] Work done with rtk gps [Stempfhuber and Buchholz, 2011] [Stempfhuber, 2013]

There has been done work on autonomous landing system using a vision aided

system. The work done in [Williams and Crump, 2012] describe a intelligent vision aided landing system that detect and generate landing waypoints for a unsurveyed airfield. Other work


Commercial landing system: [INSITU]

### 1.3 Goal of thesis

The goal of this thesis is to test the performance of ublox-LEA M8T GNSS receiver in a real time differential Differential GPS (DGPS) configuration. The Real Time Kinematic GPS (RTK-GPS) solution will be calculated with the open source program rtklib, which will communicate with a task in DUNE. The solution from rtklib will be compared against the solution from Piksi, and a post processed solution from rtklib. The result from the experiment will be used in the discussion on how to perform a autonomous landing.

### 1.4 System layout

The current state of the system is that it consist of two parts that has not yet been integrated with each other. The part were which is the main focus of this thesis is the positioning part. The plan is to use RTK-GPS for positioning estimation. The second part is the path and control path. Currently there has only been done simulation of the guidance system. It shows promising results, but is yet to be integrated with RTK-GPS. For more information on the subject please read the MSc thesis by [Frølich, 2015]. Figure 1.1 gives a overview on how the system may look like. Ideas on how the intergration can be acheived will be given in the future work section.

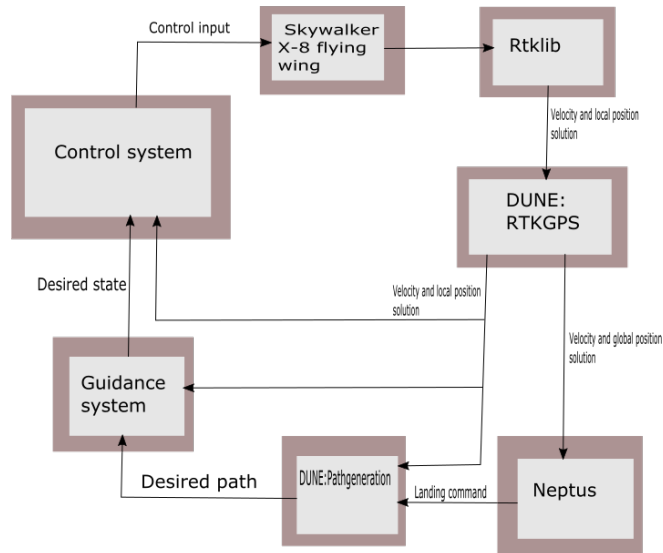

**Figure 1.1:** The structure of the autonomos landing system

## 1.5 Layout of thesis

This section is currently not up to date

Chapter 1 Intro

Chapter 2 Theory about coordinate system

Chapter 3 Theory about GNSS system with focus on the GPS

Chapter 4 Hardware and software

Chapter 5 Test and result

Chapter 6 Conclusion, discussion and further work



## Chapter 2

# Reference frames

This chapter will give an overview over different coordinate system and the relationship between them. A coordinate system is used to define a position relative to a origin. The choice of coordinate system is critical when describing the equation of motion. Newtons first law only apply when the origin is viewed as an inertial frame. When navigating on/or close to the surface there are two convension used; ENU and NED. Both the ENU and NED system is defines relative to the center of the Earth.

Write about the long lat system and the WGS 84, the ellipsoid and geosomething

### 2.1 ECI

Earth-Centered-Inertial (ECI) frame is considered a inertial frame for terrestrial navigation. The origin is fixed in the center of the Earth, and the axis is fixed in space.

### 2.2 ECEF

The Earth-Centered-Earth Fixed (ECEF) coordinate system is defined in the center of the Earth with it's x-axis point toward the intersection between the Greenwich meridian and Equator ( 0 deg longitude, 0 deg latitude). The z-axis points along the Earth's rotational axis, and the y-axis complete the right handed orthogonal coordinate system. The ECEF system can be represented in either Cartesian coordinates (xyz) or ellipsoidal coordinates (longitude, latitude and height). The ECEF frame rotate relative to the ECI frame at a angular rate of  $\omega_e = 7.2921 \times 10^{-5} rad/s$ , where  $\omega_e$  is the Earth rotation.

### 2.3 NED and ENU

The North East Down (NED) and East North Up (ENU) frame is defined as relative to the Earth reference ellipsoid (World Geodetic System, 1984 (WGS-84)). For the NED frame the x axis points in the direction to the true North, y axis towards East while the z axis points downward to completed the right handed orthogonal coordinate system. The ENU has the x and y axis exchange place in respect of the NED frame, and the z axis point upwards instead of downwards.



## Chapter 3

# Real time kinematic GNSS

This chapter outline the basic of the GPS signal. how RTKGPS works. It's assumed that the reader is familiar with how a single GPS receiver works. The first section give a brief summary on what differential GPS is, and how that principle is applied in RTK-GPS. The two following sections is directly used in RKT-GPS(maybe write some more). The last section give a quick overview over the error sources that effect the measurement.

The term rover and base station will be used when referencing two or more receivers. The term base station means a receiver that is assumed to have a known position by the other receivers. The term rover means a receiver that is allowed to move, is the main focus for position estimation.

A short description of GPS signals and error sources. How to find the Ambiguity resolution and why it's important. What is differential gps, and why use RTK-GPS.

### 3.1 GNSS constelations

The two main GNSS constellation is operation today is GPS and Glonass.

### 3.2 GPS signals

GPS uses the signals L1 and L2 to calculate the receiver position, with the L5 signal soon fully available. More detailed information about the GPS signals can be found in Misra and Enge [2011]

The position is calculated from the pseudorange to each satellite that the receiver is tracking. The two basic ways to measure the psedurange is code and phase

measurement. Phase measurement is the most accurate of the two, but also least reliable.

The receiver needs at least four satellites to be able to estimate the receiver position. Three of the satellites are used for the position, and the fourth is used to calculate the receiver clock bias.

What is needed:

Carrier frequencies?

Code and phase measurements: Phase measurement is a must due to the ambiguity resolution

For position estimation purposes there are two signals mainly available,  $L_1$  and  $L_2$ . A third signal,  $L_5$ , has recently been introduced, but since the service is not fully operational it will not be covered in this thesis. The signal structure for GPS is written:

$$\begin{aligned} L_1(t) &= A_1 p(t) d(t) \cos(f_1 t) + A_1 c(t) d(t) \sin(f_1 t) \\ L_2(t) &= A_2 p(t) d(t) \cos(f_2 t) \end{aligned}$$

The carrier frequencies for the  $L_1$  and  $L_2$  signals are

$$\begin{aligned} f_1 &= 1575.42 \text{ MHz} \\ f_2 &= 1227.60 \text{ MHz} \end{aligned}$$

$A_1$  and  $A_2$  are the signal amplitudes, and  $c(t)$  and  $p(t)$  are the Pseudo Random Noise, where  $c(t)$  is a sequence modulated into the  $L_1$  signal and  $p(t)$  into both the  $L_1$  and  $L_2$  signals.

Could tell what  $c(t)$  and  $p(t)$  is, and what is known about them. Also the strength of  $A_1$  and  $A_2$ . How the pseudorange is not important for this thesis.

What is important:

Have done: Setting up the new GPS in the base station and in x8. Need to explain how rtklib works, and what is RTKGPS. Also need to talk about Ublox LEA M8T. It's here the talk about  $L_1$  becomes relevant. Maybe talk about the coordinate frame. Why use NED/ENU with base-station as fixed frame. The configuration of the GPS (elevation mask, Kalman filter, search algorithm). Think I must remove the path theory chapter. Insert a theory chapter about coordinate frames. Maybe a chapter about Kalman filtering.

### 3.3 Error sources

In order to get high accuracy in the position estimation the different error sources must be identified and removed if possible. This section will identify some of the larger error sources that can affect the gps signal, and how to remove them in the estimation. Link the error source to where they originate

#### 3.3.1 Clock error

There is drift in both the satellite clock and the receiver clock. The atomic in the satellites makes the clock drift negligible from the user perspective. The receiver clock tends to drift, and if not taken into account will cause large deviations in the position estimate from the true position. This error is removed by including a fourth satellite in the position computation. The satellite clock drift is smaller, because the clock is an atomic clock. The receiver clock error can be relatively large. The satellite clock error is given in the satellite message.

Relative time different

#### 3.3.2 Ionospheric and Tropospheric Delays

Effect of signals travelling through the atmosphere. Free electrons from ultraviolet rays ionize a portion of gas molecules. These influence electromagnetic wave propagation.

##### **Ionospheric delay**

Gas molecules in the ionosphere become ionized by the ultraviolet rays that are emitted by the sun, which release free electrons. These electrons can influence electromagnetic wave propagation, such as GNSS signals. The delay that the signal gets from the ionosphere may cause an error of the order of 1 – 10 meters. The error can be mitigated by using a double frequency receiver, or by applying a mathematical model to estimate the delay. Both of these cases are with a single receiver, but by having a second receiver the GNSS solution system can assume that both receivers receive the signal in the same epoch, which means that the signals have experienced the same delay. More on this in section 3.4.2.

##### **Tropospheric delay**

The tropospheric delay is a function of the local temperature, pressure and relative humidity. The delay can vary from 2.4 meters to 25 meters depending on the elevation angle of the satellites. The error can be mitigated by applying a mathematical model to estimate the tropospheric delay, and by using an elevation mask can remove all satellites with an elevation angle below a certain threshold. Error caused by

tropospheric delay can be removed in the same manners as ionospheric delay when using two or more receivers. More on this in section 3.4.2.

### 3.3.3 Ephemeris Errors

Error from satellites out of position. Cannot be corrected locally, but are maintained by someone.

### 3.3.4 Multipath

One of the primary source of error in in a GNSS receiver is multipath. Multipath happens when the satellite signal is reflected by a nearby surface before it reach the antenna. The delay introduced in the signal can make the receiver believe that its position is several meters away from its true position. The easiest way to mitigate multipath is to place the antenna at a location with open skies, and not tall structures nearby.

## 3.4 Differential GPS

Differential GPS consist of at least two receivers, where one is called a base station and the rest rovers. The two receivers are within range of a communication channel over which they are communicating. There are two basic ways to implement DGPS. There is the position-space method and the range-space method. Only the latter will be covered in this thesis.

### 3.4.1 Integer Ambiguity Resolution

The integer ambiguity is the uncertainty of phase cycles between the receiver and the satellites.

There are several strategies on how to resolve the integer ambiguity. A well used strategy is the LAMBDA method. LAMBDA starts by reducing the integer search space by decorrelation adjustment. Fixed and Float Integer Ambiguity is used to calculate the carrier phase

$$\phi(t) = \phi_u(t) - \phi^s(t - \tau) + N \quad (3.1)$$

Counting the periods from

Write about how the different strategies work

### 3.4.2 Error mitigation in DGPS

The advantage with DGPS is that two or more receivers can share the same error sources. This enable the solution system almost completely remove them. In the

case of a moving baseline situation the GNSS system assumes that the rover is close enough to the base station such that they share the same atmospheric conditions. If this assumption holds the system should be able to almost remove the error caused by atmospheric delay.

### 3.4.3 RTK GPS

RTK GPS sacrifices correctness in order to give a position estimate in real-time. ADD HERE RESEARCH IN THE RTK FIELD. Real time position is critical for an autonomous system to navigate to a given position.

PASS PÅ FOR Å GÅ INNOM SYSTEM SPEC. KUN TEORI OM RTK GPS  
Dynamic system can be solved in kinematic mode, or with a moving baseline. In kinematic mode the rover is allowed to move, but the base station is assumed stationary with a known position. In the case of a moving baseline both the rover and base station is allowed to move. The position of the base station is calculated in single mode. Without a known position of the base station the global position of the rover can never be better than if calculated in single mode. However the relative position of the rover from the base station is calculated accurately. Therefore from a local control system perspective need to write about baseline restrictions. In the case of this thesis is a moving baseline relevant.

Trade off between getting the position fast, and getting it right

Moving baseline restrictions. The base station's position is calculated with in single mode. The error in position to the base station is inherited by the rover. Source of error.

## 3.5 Integer Ambiguity Resolution

### 3.5.1 Search space minimization strategies

There are several search techniques that can be applied to resolve the integer ambiguity, but this section will only cover the "Least Square Ambiguity Decorrelation Adjustment" (LAMBDA) method which is the technique used in rtklib.



## Chapter 4

# System Components

This chapter contains a brief description of the system that has been used.

### 4.1 Software

This section contain the different software that is used in the x8 system. The control and guidance system is runs on Dune, and the missionplaner on Neptus. The x8 operation system is GLUED. The system is connected to the rtklib which is in communication with DUNE. The internal communication in DUNE is based on IMC messages

#### 4.1.1 GLUED

Glued is a minimal Linux distribution developed by LSTS, and design with embedded system in mind. It is platform independent, easy to configure and contain only the necessary packages to run on a embedded system. This makes GLUED a light and fast distribution. GLUED is configured through a single configuration file that which can be created for a specific system.

#### 4.1.2 Dune

Dune is a runtime environment for unmanned systems on-board software created by LSTS (Underwater Systems and Technology Laboratory) in Porto, Portugal. The environment type is called a middleware, which is seeing increase usage in unmanned systems. Can refer to ROS or MOOS middleware.

Dune works by setting up individual task that can dispatch and subscribe to different IMC messages. The IMC messages will be explained in 4.1.3 A type of middleware. write how to link rtklib with dune Refer to the dune wiki page


### 4.1.3 IMC

Write about the message structure and how it's connected to DUNE. Include how to make new messages.

### 4.1.4 Netpus

### 4.1.5 RTKLIB

Rtklib is a open source program package for standard and precise positioning with GNSS developed by T. Takasu. Rtklib can use raw GNSS data to estimate the position of the rover. Rtklib can be configured to give a position solution in real time in differential mode. Figure 4.1 shows how rtklib can be used in a RTKGNSS mode. The two main moduels here is str2str and rtkrcv. Both will be explained more closely in the following sections. More information about rtklib can be found in [Rtk].

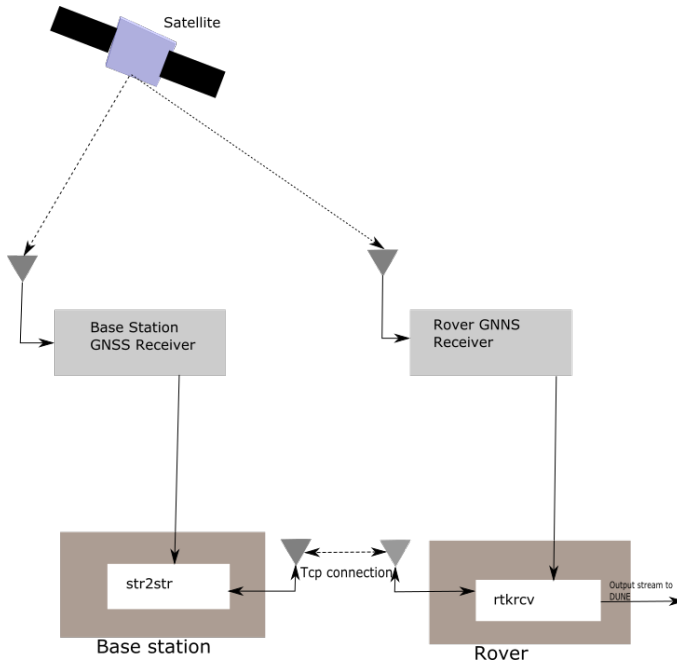

**Figure 4.1:** The communication structure of rtklib

#### **rtkrcv**

Rtkrcv is the app program that calculate the position of the rover. Rtkrcv can be configured to have two output streams. The structure of the output stream is given the rtklib manual, however there has been done some alteration in the structure



of the output. It's desired in a autonomos landing system that have that velocity solution. This is was not provided in the newest version of rtklib, and therefore the source code was altered to send out the velocity data. A quick note here is that it is only available in the output solution is in a enu format.

When set configured as a differential GPS rtkrcv uses the LAMBDA method to resolve the integer ambiguity. The solution is considered fixed if the ration between the best estimate and the second best estimate is above a certain threshold. The solution body is given is table

Header	Content
1 Time	The epoch time of the solution indicate the true receiver signal reception time. Can have the following format:  yyyy/mm/dd HH:MM:SS.SSS: Calender time in GPST, UTC or JST.  WWWW SSSSSSS.SSS: GPS week and TOW in seconds
2 Receiver Position	The rover receive antenna position
3 Quality flag (Q)	The flag which indicates the solution quality. 1:Fixed 2:Float 5:Single
4 Number of valid satellites (ns)	The number of valid satellites for solution estimation.
5 Standard deviation	The estimated standard deviation of the solution assuming a priori error model and error parameters by the positioning options
6 Age of differential	The time difference between the observation data epochs of the rover receiver and base station in second.
7 Ratio factor	The ratio factor of "ratio-test" for standard integer ambiguity validation strategy
8 Receiver velocity	The velocity of the rover. Given only when output is in enu f

**Table 4.1:** Table 1.

**str2str**

Str2str is the app program that retrieve the ublox signal from the gps and sends over tcp to the rtkrev app. The str2str is setup to either send RMTC 3 messages, or whatever is send in from the GPS. Since the str2str do not support to send ublox signal directly. How to write that the user should not specify the input format or the output format.

**4.2 Physical system**

This section outline the physical components in the x8 and the base station.

**4.2.1 Beaglebone**

The system runs on a Beaglebone. A beaglebone were prepared for mounting in a x8

**4.2.2 The GPS receiver**

Write about the Ublox LEA M8T gnss receiver. Also include that it support sending GPS and GLONASS data at the same time. Need to be configured. A receiver were prepare and mounted in the x8.

## Chapter 5

# Implementation

### 5.1 Software implementation

#### 5.1.1 Rtklib

PLASSERES I APPENDIX

##### **str2str configuration**

The system has two instances of rtklib. The base station uses the str2str and the x8 uses rtkrcv. str2str is configured to receive raw data from the ublox at a frequency of 10 Hz. The connection between str2str and the GNSS receiver is a uart cable that is configured with a baudrate at 115200. The program starts a tcp server where rtkrcv becomes a client.

Very short about how Glued is used: Start up,

About rtklib: What does rtklib do in the system, where does it run, what instances is used, how does it connect to dune, what is the output message

About dune: What tasks are used to communicate with rtklib, how do they communicate, what is the output of the given task

About Neptus: What does neptus do, how is it used in the system, how will it be used in an automatic landing scenario.

About Ardupilot: Very short on what Ardupilot does in the system

All in one section unless something needs more space. Write here how rtklib is configured and how the system is connected. Write here how Dune receives data from rtklib and what task is used. Include also what imc message is involved in the task

Write here how neptus is configured for the test, and how it is used How Glued is configured to run rtklib and Dune

## 5.2 Hardware implementation

This section contain how all the physical components are connected at both the rover and the base station. Include also how everything was prepared.

About Beaglebone: What runs on the beaglebone, connections, devices, what is it place in the system

About Ublox: Explain the ublox from a system perspective, how it's connected

Pixhawk: What do it do in the system:

Piksi: Same as ublox

The X8: How do it fit in the system

The base station: Same as x8

Antennas:

Wifi router

## Chapter 6

# Experimental testing

This chapter contain the result from the test that were performed. The goal with these test was to evaluate the ublox receiver against the pixi receiver, and to get a impression on the accuracy to the rtklib solution with ublox. The comparison test was performed with the pixi and ublox connected to the same antenna at both the rover and the base station. Then the deviation in the position estimate can only come from the receivers. The accuracy test of the ublox was tested by performing the same manoeuvre several times.

### 6.1 Physical testing

The physical experiment were done in two parts. During the first part the x8 was carried around on a open field. The goal with this experiment was to log data from rtklib and piksi, and then compare how they deviated from each other. The second part of the physical experiment was flying (SKRIV NÅR FLYVING ER GJENNNOMFØRT)

#### 6.1.1 Fly test

#### 6.1.2 GPS test

The experiment started when both rtklib and piksi would signal that they had a fixed integer solution.



## Chapter 7

# Conclusion and Discussion

### 7.1 Further work

Setup the reciver to use both gps and glonass raw data.





# References

*RTKLIB ver. 2.4.2 Manual.*

Geoffrey Blewitt. Carrier phase ambiguity resolution for the global positioning system applied to geodetic baselines up to 2000 km. *Journal of Geophysical Research*, 94(B8):10,187–10,203, 1989.

Marcus Frølich. Automatic ship landing system for fixed-wing uav. Master's thesis, Norwegian University of Science and Technology, NTNU, 2015.

INSITU. Scaneagle system. <http://www.insitu.com/systems/scaneagle>. Accessed: 07.12.2015.

H Jin Kim, Mingu Kim, Hyon Lim, Chulwoo Park, Seungho Yoon, Daewon Lee, Hyunjin Choi, Gyeongtaek Oh, Jongho Park, and Youdan Kim. Fully autonomous vision-based net-recovery landing system for a fixed-wing uav. *Mechatronics, IEEE/ASME Transactions on*, 18(4):1320–1333, 2013.

Pratap Misra and Per Enge. *Global Positioning System Signals, Measurements and Performance Revised Second Edition*. Ganga-Jamuna Press, 2011.

P.J. de Jonge P.J.G Teunissen and C.C.J.M. Tiberius. The lambda-method for fast gps surveying. Presented at the International Symposium "GPS Technology Applications" Bucharest, Romania, 1995.

Robert Skulstad and Christoffer Lie Syversen. Low-cost instrumentation system for recovery of fixed-wing uav in a net. Master's thesis, Norwegian University of Science and Technology, NTNU, 2014.

Samuel Jacobus Adriaan Smit. Autonomous landing of a fixed-wing unmanned aerial vehicle using differential gps. Master's thesis, Stellenbosch: Stellenbosch University, 2013.

Bjørn Amstrup Spockeli. Integration of rtk gps and imu for accurate uav positioning. Master's thesis, Norwegian University of Science and Technology, NTNU, 2015.

W. Stempfhuber. 3d-rtk capability of single gnss receivers. *International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 2013.

W. Stempfhuber and M. Buchholz. A precise, low-cost rtk gnss system for uav applications. *International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 2011.

P.J.G. Teunissen. A new method for fast carrier phase ambiguity estimation. *IEEE*, pages 562–573, 1994.

P.J.G. Teunissen. The least-squares ambiguity decorrelation adjustment: a method for fast gps integer ambiguity estimation. *Journal of Geodesy*, 70:65–82, 1995.

Paul Williams and Michael Crump. Intelligent landing system for landing uavs at unsurveyed airfields. In *28th International Congress of the Aeronautical Sciences*, 2012.