

1. Front View A and B
2. Back View A and B
3. Front Facing View A and B
4. Back Facing View A and B
5. Bloomers View A and B
6. Front Ruffle View B
7. Back Ruffle View B
8. Hat Ruffle View B
9. Hat Crown Panel View B and C
10. Front View C
11. Back View C
12. Front Facing View C
13. Back Facing View C
14. Front Pocket View C
15. Back Pocket View C
16. Hat Inner Brim View C
17. Hat Outer Brim View C
18. Optional Appliqué


For View A, use pattern pieces 1 through 5.
For View B, use pattern pieces 1 through 9.
For View C, use pattern pieces 9 through 17.
For Appliqué, use pattern piece 18.

HOW TO USE KWIK-SEW MULTI-SIZE PATTERN


Pattern includes four sizes and the lines are color coded for the different sizes. Pattern is made to fit specific body measurements with ease allowed for comfort and style. To select pattern size, compare your body measurements to those listed on the back of the pattern envelope and choose the size that is closest to your measurements. Select the pattern pieces for the view you have chosen. Press pattern pieces with a dry iron and cut out the paper pattern pieces, following the view and the color coding for the size you have chosen. Check for correct length and make any necessary adjustments on pattern pieces before placing them on fabric for cutting.

CUTTING Preshrink fabric if necessary. Fold fabric double, right sides together, unless otherwise indicated in the layouts. Place pattern pieces on wrong side of fabric, following the layout for size, view and fabric width. If placing pattern pieces on single layer of fabric, place fabric right side up. Any adjustments made on the pattern can change the position of the pattern pieces, in this case, use the layout only as a guide. Layouts are shown for fabric with nap, one-way design or shading, place all pattern pieces with the arrow on top of the grain line in the same direction. Follow arrows for correct grain, placing ends of grain line an equal distance from the selvage. Hold pattern pieces in place with weights or pins. Cut out pattern pieces, using scissors or rotary cutter. Before removing the pattern pieces from fabric, transfer all construction lines, dots and notches to fabric. The easiest way to mark notches, dots, center front, center back and fold lines is to make tiny clips on the seam allowances. Or, mark with chalk or water soluble pen. If marking is needed on right side of fabric, mark with pins or hand basting stitches. Label pattern pieces on wrong side with tape.


LAYOUT CODE



FABRIC 60" (152 cm) WIDE

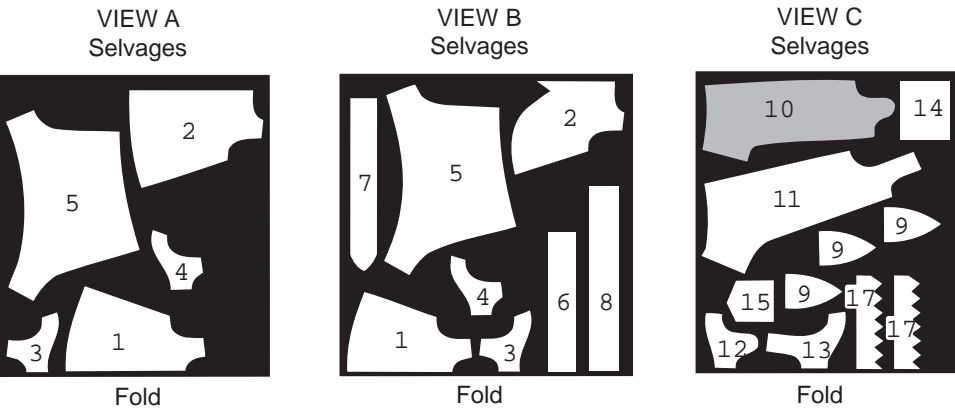


FABRIC 45" (115 cm) WIDE

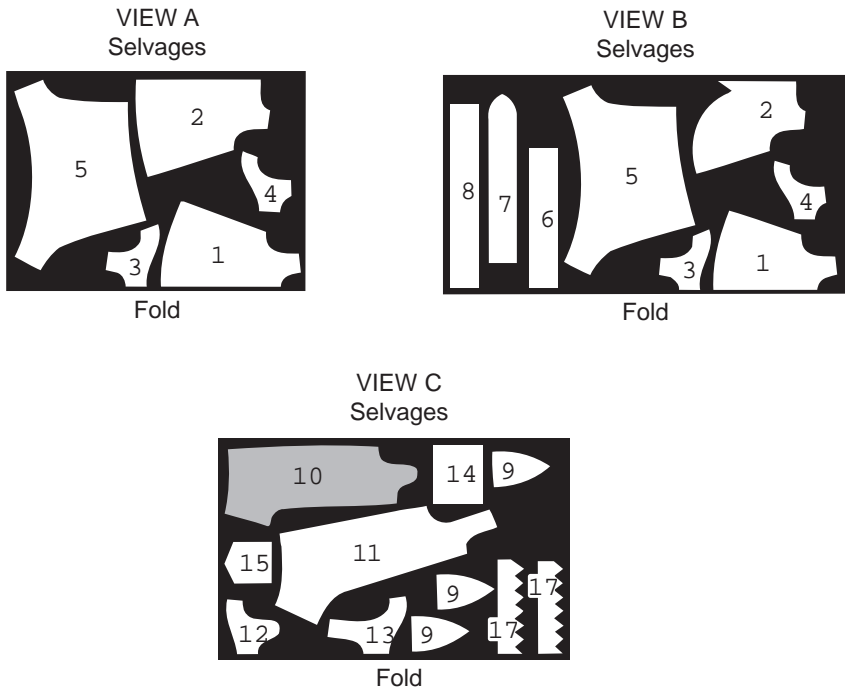


CONTRAST FABRIC

60" (152 cm) WIDE

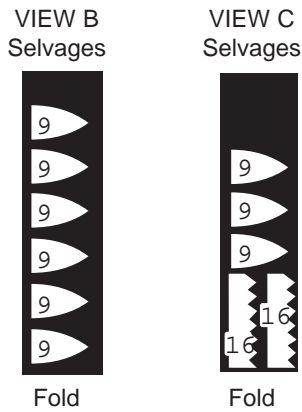

45" (115 cm) WIDE



SEWING PROCEDURES

Use an all purpose thread and a size 12/80 sewing machine needle for light to medium weight fabric and a size 12/80 or 14/90 for medium to heavyweight fabric.

Standard sewing machine. Sew the seams with a medium length straight stitch. Overcast seam allowances together, unless otherwise stated in the instructions, and finish raw edges of facings, hems and single layers of fabric, using a wide zigzag stitch or a three-step zigzag stitch.

Serger (overlock) machine. Sew the seams and finish the raw edges of facings, hems and single layers of fabric. Guide fabric, being sure that only the 1/4" (6 mm) seam allowance is used.

Understitching keeps facings and bindings from rolling to outside of garment. Fold the seam allowances toward the facing and stitch on facing close to seam through facing and seam allowances.

Easing and gathering one or two rows of machine stitching on the seam allowances with a longer stitch length and looser thread tension. Stitch lengths vary from 6 to 10 stitches per inch (3 - 5 per cm), use a shorter stitch length for sheer or lightweight fabric and a longer length for medium to heavyweight fabrics.


SEAM ALLOWANCES – 1/4" (6 mm) seam allowances are included for all seams, unless otherwise specified in the following instructions.

PRESSING

Steam press each seam as sewn. Press seams open, unless otherwise specified in the following instructions. Clip seam allowances where necessary so seams are flat.




FABRIC ILLUSTRATION CODE

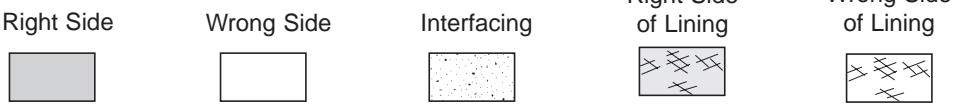


OPTIONAL APPLIQUE


Select fabrics for body, bill, feet and mask. Trace the individual pieces separately to paper backed fusible web. Place the rough side of paper (web side) to wrong side of fabrics and fuse.

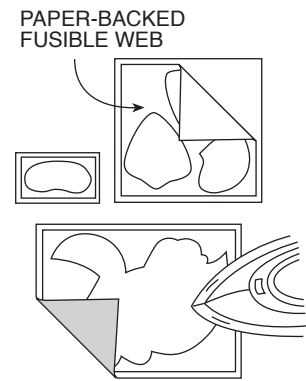


Cut out all pieces. Remove the paper from appliqué pieces.

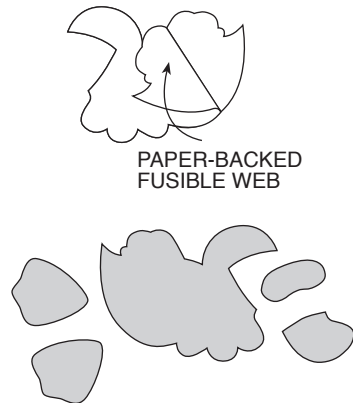

Using the complete appliqué pattern as a guide, fuse the pieces to garment at position desired in the following order: Body, bill, mask and feet. Using the complete appliqué pattern as a guide, transfer detail lines.

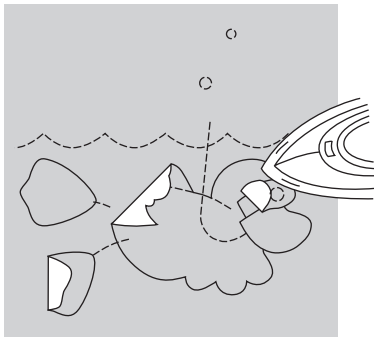


Place a piece of tear-away material on wrong side under appliqué and pin or baste in place. Satin stitch over all raw edges, using a medium zigzag width and a very short stitch length; change color of thread as necessary. Satin stitch all the detail lines. Embroider eyes with hand stitches. Zigzag bubbles, forming circles. Remove tear away material.

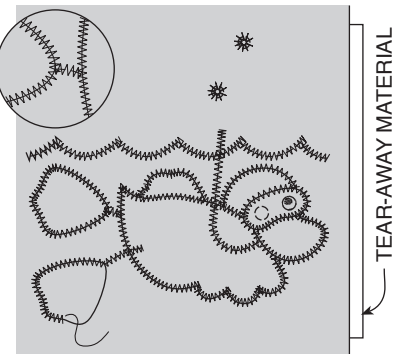


VIEW A


1. Fuse interfacing to wrong side of facings on backs. Overcast outer edges of facings. Fold facings on fold lines to wrong side and press.

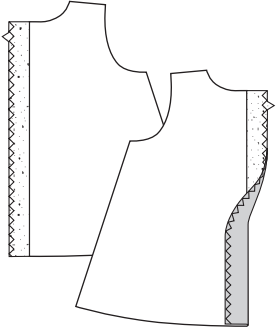


2. Stitch backs to front at shoulder seams, right sides together. Press seam allowances toward backs.




Stitch back facings to front facing, right sides together, at shoulder seams. Press seam allowances toward front. Overcast outer edges of facing.

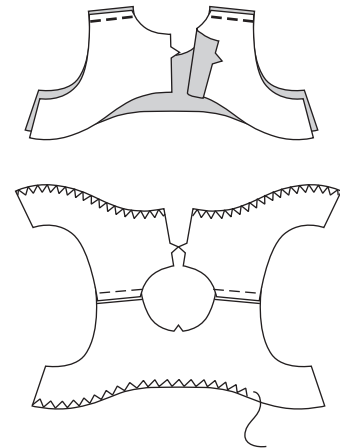



3. Pin back facing to outer edge of back, right sides together, matching notches, and stitch. Repeat for other back.

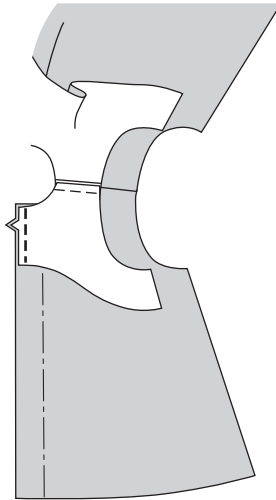


4. Press facing seam allowances toward armhole. Fold backs on fold lines, right sides together, and pin facing to neckline, matching shoulder seams, and notches for center front. Stitch neckline and clip seam allowances.

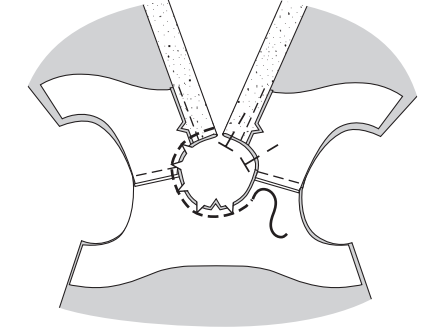



Understitch neckline seam allowances to facing, starting and stopping as close as possible to back edges, see Sewing Procedures. Turn facing to wrong side and press.

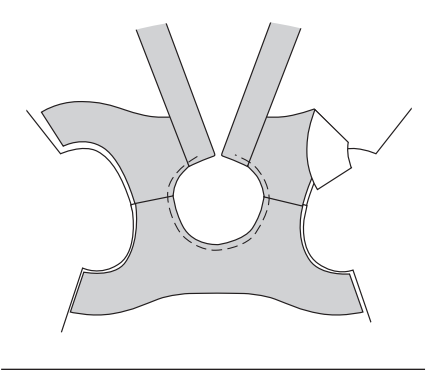


5. Turn facing to right side and pin facing to dress at armholes, right sides together, matching shoulder seams, and armhole edges. Stitch armholes and clip seam allowances.

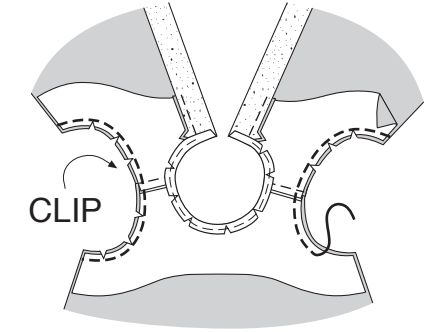


To turn right side out, insert a large safety pin to bottom of back. Insert safety pin through shoulder and pull back to front one side at a time. Press, rolling seams slightly to inside.

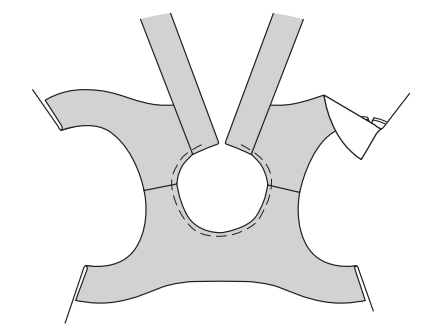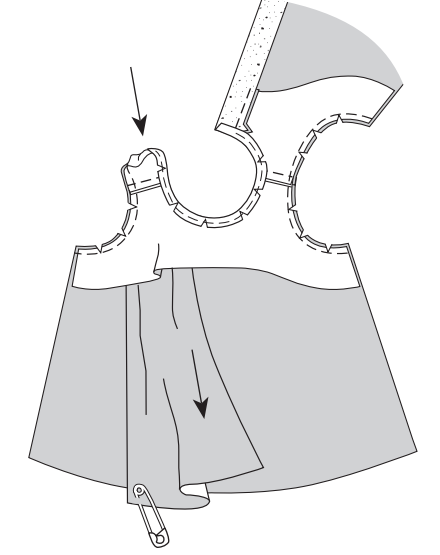


6. Pin front to back, right sides together, at side seam. Stitch from bottom edge to outer edge of facing. Repeat for other side.




Turn facing to wrong side and press. Pin facing to dress at side seam. Secure facing to side seam, by stitching on right side along seam line the width of facing. Repeat for other side.




7. Overcast bottom edge. At bottom edge of back, fold facing on fold line to right side and stitch the width of facing 5/8" (1.5 cm) from bottom edge. Trim hem on facing. Turn facing to wrong side and press.

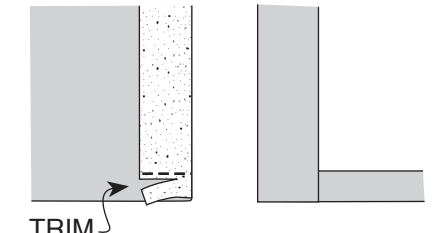


Fold 5/8" (1.5 cm) hem to wrong side, press and pin. Stitch close to edge of hem. Stitch close to outer edges of facings on backs.

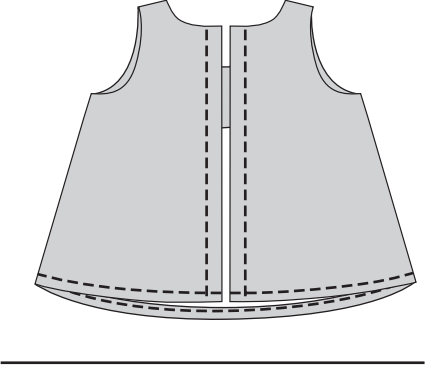

8. On left back, mark placements for buttonholes 1/2" (1.3 cm) from edges, top mark 1/2" (1.3 cm) below neckline and the remaining two marks the following distance apart:
S - 1 3/4" (4.5 cm)
M - 2 1/4" (5.5 cm)
L - 2 5/8" (6.5 cm)
XL - 3 1/4" (8 cm)

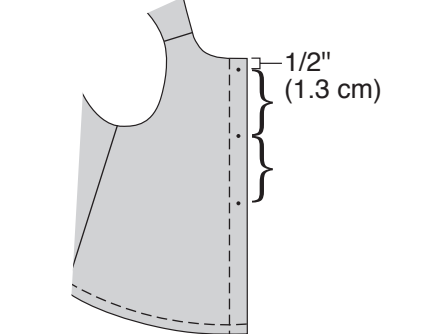


Make vertical buttonholes and sew buttons to right back along center back to match. Or, if desired apply snaps, using the same placement.

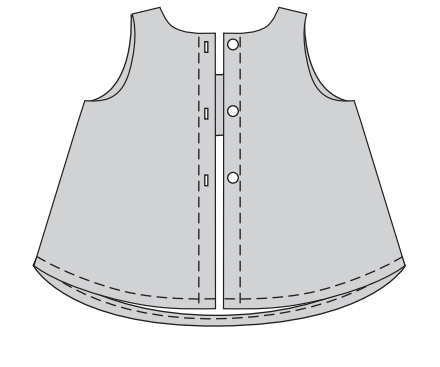


Bloomers


9. Pin bloomers, right sides together, and stitch center front seam and center back seam, matching notches.

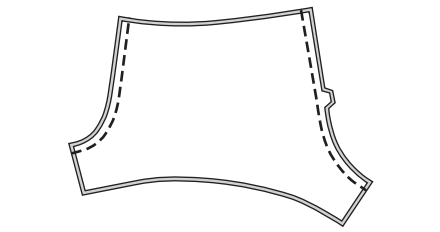

10. Fold bloomers, right sides together, matching center front seam to center back seam and stitch inside leg seams.






11. Overcast waist and leg openings. Fold 5/8" (1.5 cm) to wrong side for casings and press. Stitch close to edges, leaving openings for inserting elastics.



12. Cut pieces of 1/4" (6 mm) wide elastic the following lengths:
Waist - cut 1
S - 16" (40 cm)
M - 16 1/2" (42 cm)
L - 17" (43 cm)
XL - 17 1/2" (44 cm)

Leg openings - cut 2
S - 8" (20 cm)
M - 8 1/2" (21 cm)
L - 9 1/4" (23 cm)
XL - 10" (25 cm)



13. Insert elastics into casings. Overlap ends of each piece of elastic 3/8" (1 cm) and stitch together. Finish stitching the casing seams. Distribute gathers evenly and stitch across the width of the waist elastic at center front and center back seams.




VIEW B

1. Sew dress, following View A steps 1 through 6.


2. Stitch back ruffles to front ruffle, right sides together, at side seams and press seam allowances open.




Fold ruffle in half lengthwise, wrong sides together, and press. Sew gathering stitches 1/4" (6 mm) from raw edges and again in the middle of seam allowances.




3. Pull up gathering stitches to gather ruffle. Pin ruffle to right side of bottom edge, matching center front, side seams and ends of ruffle to fold lines on backs. Pull up gathering stitches to fit, adjusting gathers evenly. Stitch.

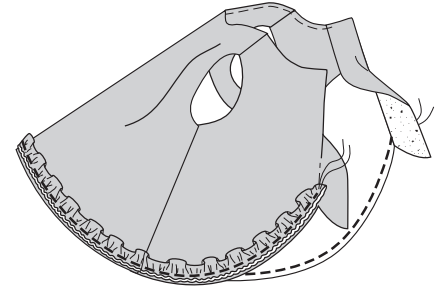


Fold facing on fold line to right side over ruffle and stitch, following the previous stitches. Repeat for other side. Overcast seam allowances together.

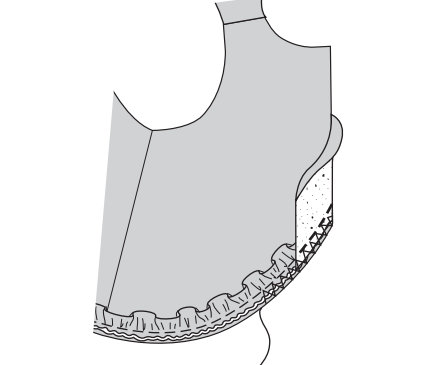


Turn facing to wrong side and press. Stitch close to edge of back facing. Repeat for other back.

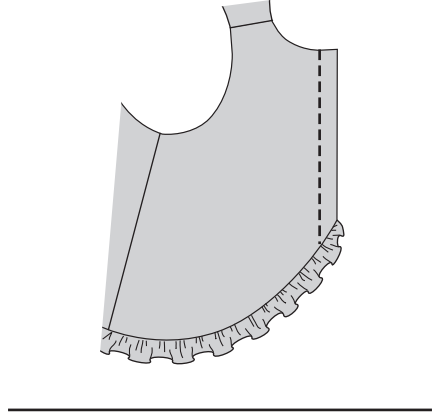

4. On left back, mark placements for two buttonholes 1/2" (1.3 cm) from edge, mark top buttonhole 1/2" (1.3 cm) below neckline and the second the following distance below:
S - 2 1/2" (6 cm)
M - 3 1/4" (8 cm)
L - 3 3/4" (9.5 cm)
XL - 4 1/4" (11 cm)

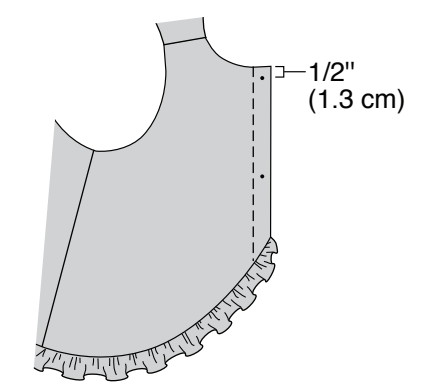

Make vertical buttonholes and sew buttons to right back along center back to match. Or, if desired apply snaps, using the same placement.

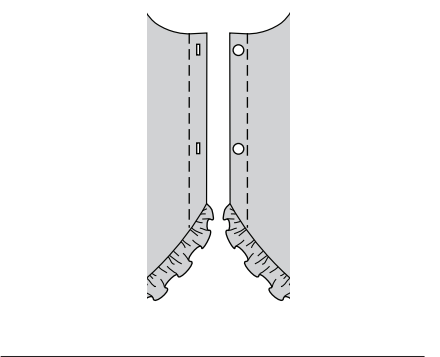


5. Continue to sew, following View A steps 9 through 13.


HAT VIEW B

Note: Illustrations show inside crown as lining.


1. Stitch two crown panels, right sides together, at panel seam. Pin a third panel to these panels, right sides together and stitch panel seam, stopping 1/4" (6 mm) below top edge. Repeat for the other three panels.

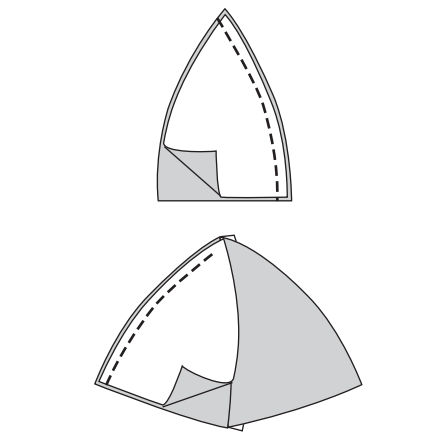


Pin the two crown sections, right sides together, matching panel seams and stitch.

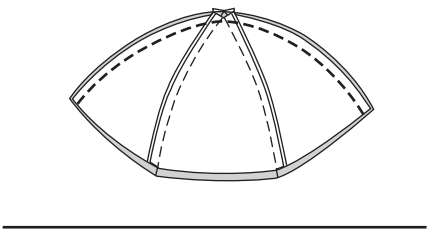


2. Stitch center back seam of ruffle, right sides together, and press seam allowances open.

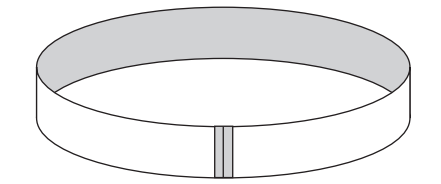


Fold ruffle in half lengthwise, wrong sides together, and press. Divide ruffle into four and mark. Sew gathering stitches 1/4" (6 mm) from edges and again in the middle of seam allowances. Divide crown into four and mark.

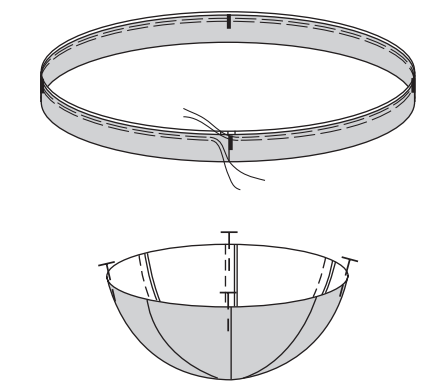


Pin ruffle to right side of crown, matching marks and seam on ruffle to panel seam. Pull up gathering stitches to fit, adjusting gathers evenly. Stitch.

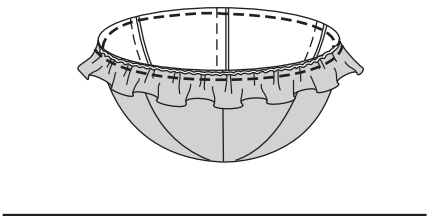


3. Sew crown panels for inside crown, following step 1, leave a 2 1/2" (6 cm) opening in the middle of one panel seam for turning.

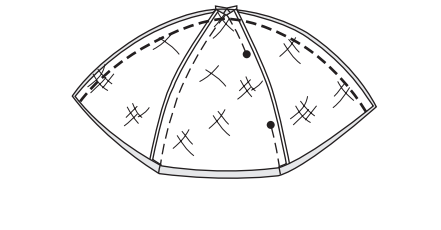

4. Pin crown lining to hat over ruffle, right sides together, matching panel seams and stitch.



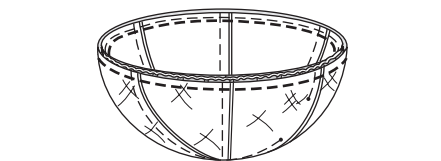


Turn hat right side out through the opening. Fold under edges of opening and stitch to close opening.

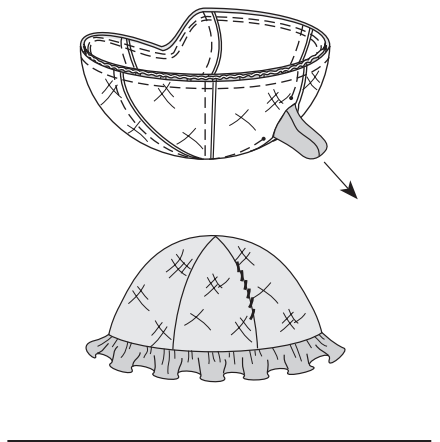


VIEW C


1. Cut interfacing for front and back facings as marked on pattern and fuse to wrong sides, as shown. To reinforce for the snaps at inside leg seams, cut four 3/4" (2 cm) wide strips of interfacing the length of inside leg seam. Place pieces on wrong side of facings at inside leg seams of fronts and backs and fuse in place.

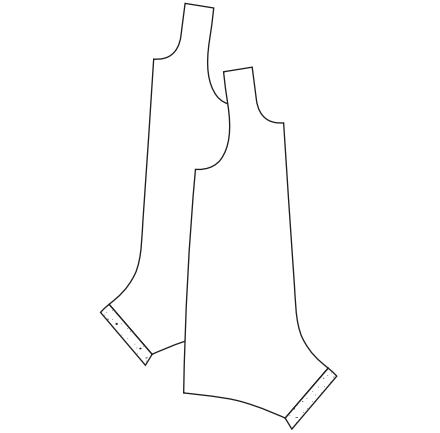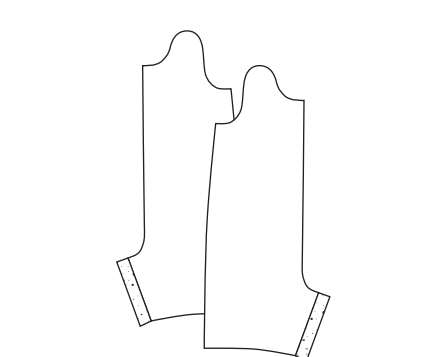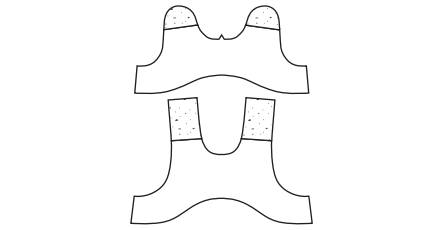


2. Stitch fronts, right sides together, at center front seam.

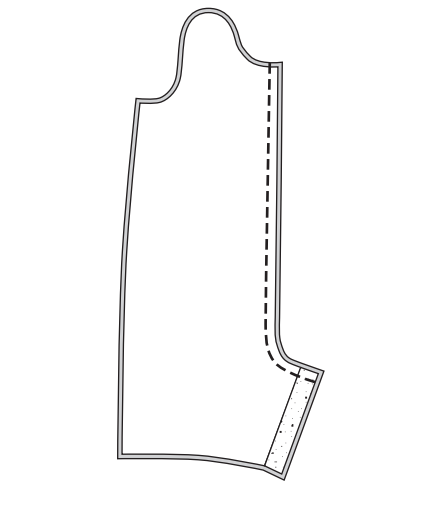


3. Fold front pocket facing on fold line to wrong side and press. Fold under raw edge to make a double facing and press. Stitch close to edge of facing. Fold under bottom and side edges of pocket 1/4" (6 mm) and press.

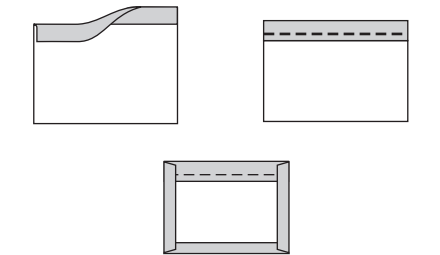


Pin pocket to front at placement marked and stitch close to edges and again 1/4" (6 mm) from edges.

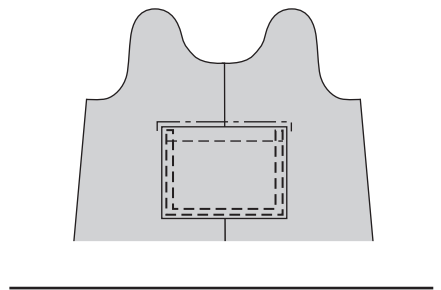


4. Fold back pocket facing on fold line to wrong side and press. Fold under raw edge to make a double facing and press. Stitch close to edge of facing. Fold under bottom and side edges of pocket 1/4" (6 mm) and press. Repeat for other pocket.

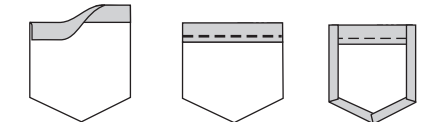



Pin pocket to back at placement marked and stitch close to edges and again 1/4" (6 mm) from edges. Repeat for other back.

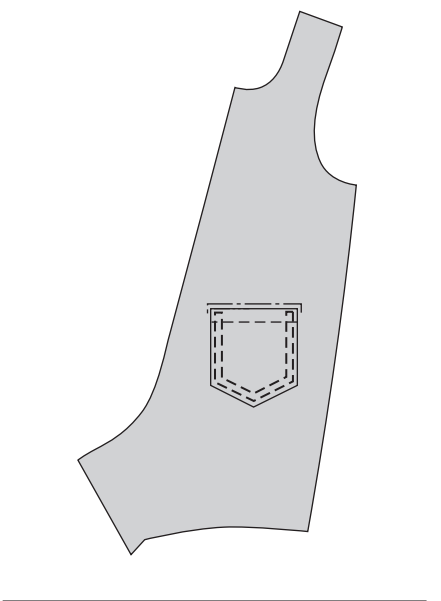



5. Stitch backs, right sides together, at center back seam.

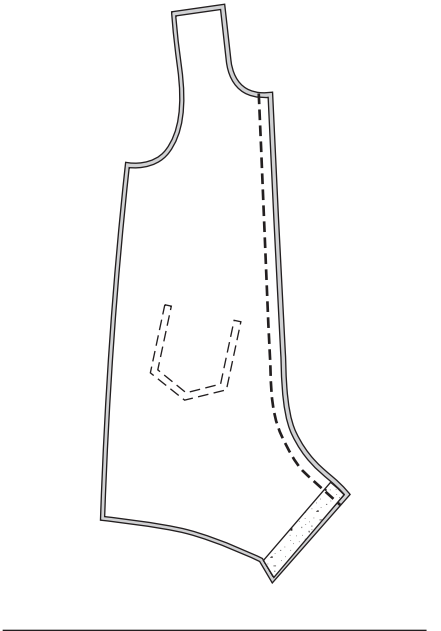


6. Overcast outer edges of front and back facings. Pin front facing to front, right sides together, matching notch to center front seam and stitch neckline, shoulders and armholes. Clip seam allowances. Turn facing to wrong side and press.

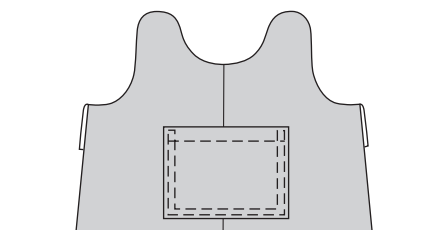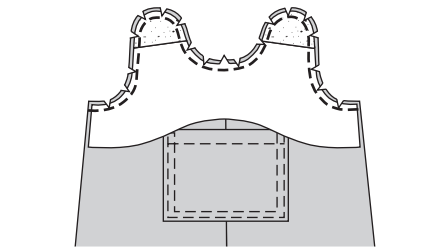


Pin back facing to back, right sides together, and stitch neckline, shoulders and armholes. Clip seam allowances and trim corners. Turn facing to wrong side and press.

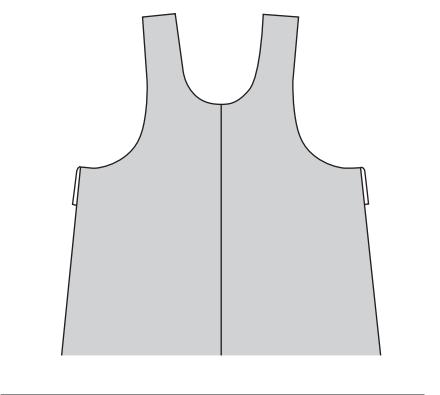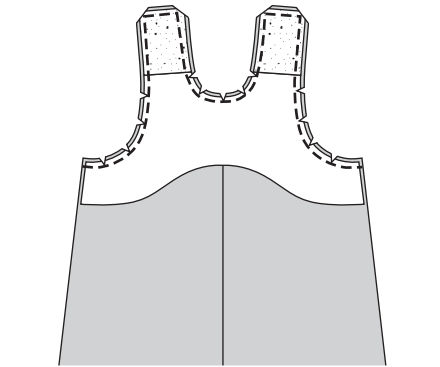


7. Pin front to back, right sides together, at side seam, matching armholes seams. Stitch from bottom edge to edge of facing. Repeat for other side.

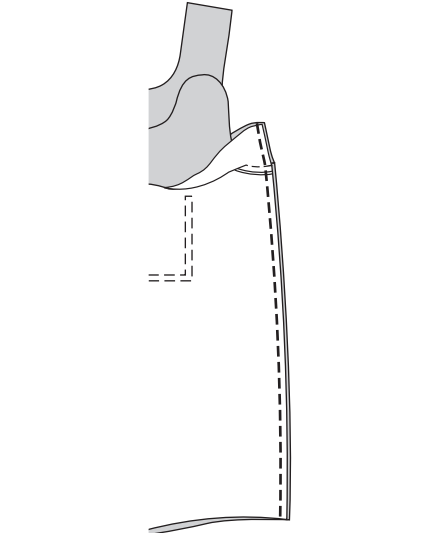


Turn facing to wrong side and pin to side seam. Secure facing to side seam by stitching on right side along seam line. Repeat for other side.

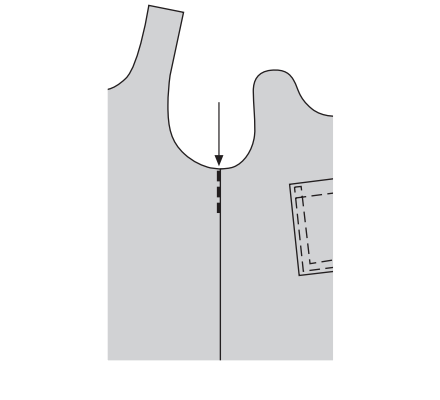


8. Overcast bottom edges of legs and edges of facings on inside legs of front and back. Fold facings on fold lines to wrong side, press and pin. Stitch close to edges of facings.

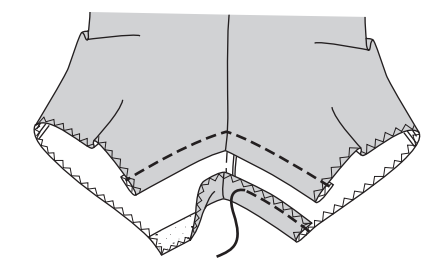


Fold 5/8" (1.5 cm) hems to wrong side, press and pin. Stitch close to edges of hems.

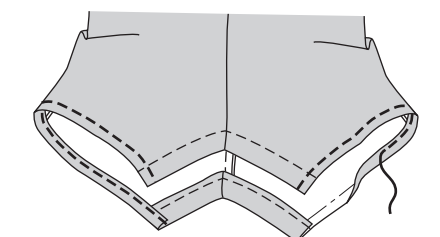


9. Transfer placements for snaps to front and back shoulders. Apply snaps, front overlaps back.

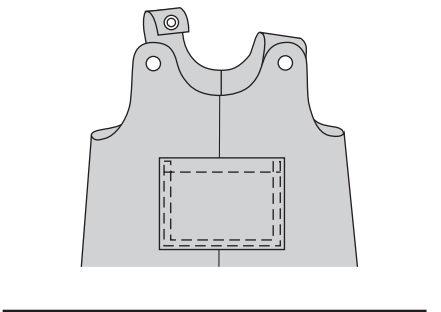

10. Mark snap placements on inside legs, as follows: 3/4" (2 cm) on each side of center front and center back seams and 3/4" (2 cm) above bottom edges. For sizes L and XL, add another placement halfway between the two. Apply the snaps, front overlaps back.

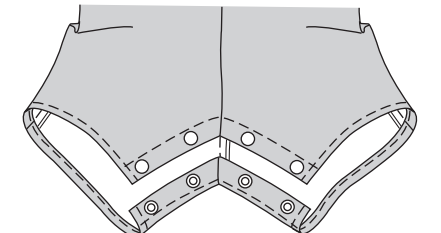

Sizes S-M

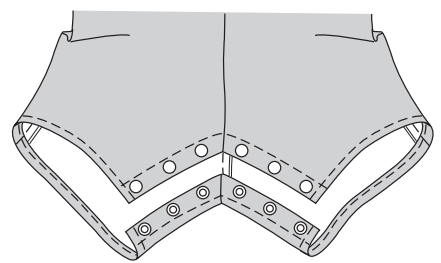


Sizes L-XL

HAT VIEW C



Note: Illustrations show inside crown as lining.

1. Start to sew hat, following Hat View B step 1.

2. Stitch center back seams of inner brims, right sides together, and press seam allowances open.

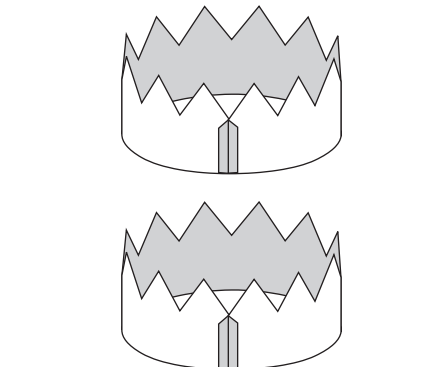


Pin inner brims, right sides together, at outer edges. Stitch, pivoting at outer and inner corners. Clip seam allowances to stitches on inner corners. Trim outer corners. Turn right side out and press.

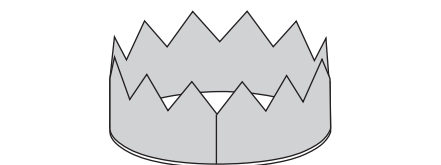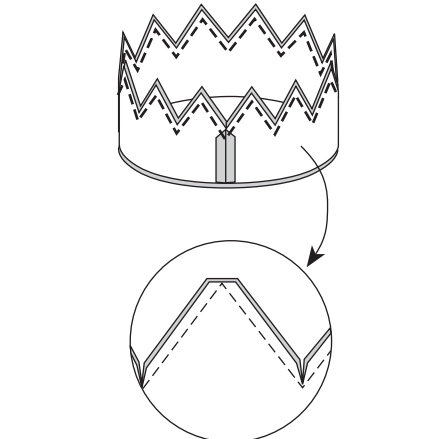


Sew the **outer brim**, using the same procedures.


3. Place outer brim to inner brim with raw edges even, match center back seams and line up points. Stitch close to edges to keep in place.

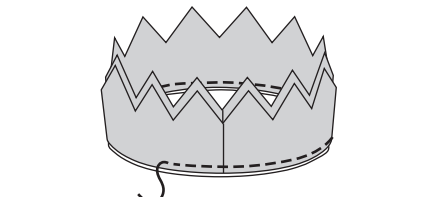



Pin brim to right side of crown with outer brim facing up, matching center back seam to one panel seam. Stitch.

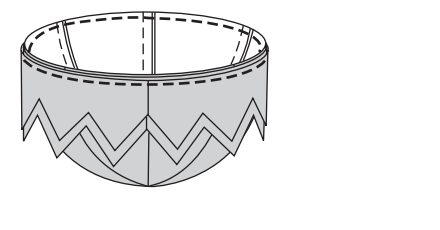

4. Sew crown panels from contrast fabric for inside crown, following Hat View B step 1; leave a 2 1/2" (6 cm) opening in the middle of one panel seam for turning.

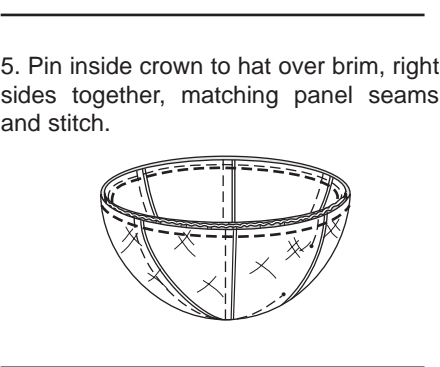

6. Turn hat right side out through the opening. Fold under edges of opening and stitch close to edges. Press and stitch through all layers 1/8" (3 mm) from seam. See illustration.

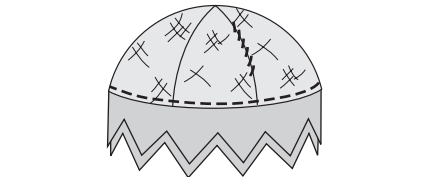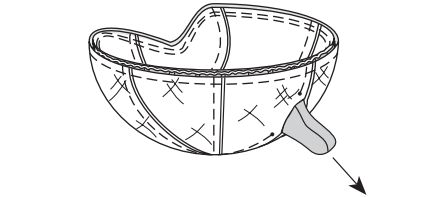

Fold brim 3/8" (1 cm) from seam to outside and press.



If you purchased this pattern without the enclosing envelope, you should be aware that this pattern is stolen property. It was reported "unsold and destroyed" to KWIK•SEW®, and neither KWIK•SEW® nor the distributor has received any payment for this "stripped pattern."

©MMX KWIK•SEW® Pattern Co., Inc. All rights reserved. Protected under international copyright law. Commercial or industrial use prohibited unless there is a written agreement with KWIK•SEW® Pattern Co., Inc. This pattern or any part thereof may not be reproduced in any form or by any process without written permission from the copyright owner.

KWIK•SEW® Pattern Co., Inc. is not responsible for misprints or other errors, and in no event shall be liable for any damages whatsoever resulting from the purchase or use of this product.

Printed in the United States of America.