

COMPASS: Temporally Consistent Topological Passing Decisions for Socially Aware Robot Navigation

Jungmo Kang
kangjmo91@gmail.com

Abstract

Service robots in crowded pedestrian environments re-decide at every control cycle which side to pass a person on; when this re-decision is greedy, the passing direction can oscillate across cycles in ambiguous configurations, or the robot can freeze. Topology-aware planners bias selection toward the previously chosen class through soft costs, selection hysteresis, or consistency weights; opinion-dynamics methods make the passing side an explicit, stateful decision with deadlock-breaking guarantees; and minimum-dwell or fixed-rate selectors bound the switching rate by construction. We introduce *COMPASS* (COMmitment-based PASSing for Social navigation), a decision-layer planner whose commitment rule is a leaky evidence accumulator — a rectified, leaky variant of Page’s one-sided CUSUM statistic with a progress-dependent threshold — under a lexicographic safety override of the standard priority-arbitration kind. Passing classes are bound to person track IDs, a design contract that the current implementation only partly realizes. We state five properties (P1–P5); they apply standard arguments and are not new mathematics. The load-bearing one, P2, is a deterministic, pathwise lower bound on the number of control cycles between discretionary switches that follows from the accumulator rather than from a fixed dwell timer; at the default knobs its worst case is 3 cycles (0.15 s). P2 is paired with a conditional response-time bound, and P1 refines it to an exponentially small per-cycle switching probability under an i.i.d. hypothesis. In an offline harness that drives the actual decision core (5 scenarios $\times$ 50 seeds), an immediate-argmin comparator produces about 98 decision changes per encounter under ambiguous ties, whereas COMPASS produces at most one decision change in each tested encounter, as does a 0.6 s persistence (dwell) timer in that scenario; the two rules differ under transient, reversing and intermittent advantage. In a historical decision-core-only measurement, latency at $K = 3$ (8 classes) is p99 58.6 μ s and max 651.3 μ s (the max is about 1.30% of the 50 ms budget at 20 Hz). All comparators are internal. Closed-loop evaluation, external baselines (including a previous-class consistency-weight baseline), and user studies are not performed; they are specified as a planned-evaluation protocol (§5.6). Code: <https://github.com/kjungmo/compass>.

Keywords: social navigation, topological path planning, temporal consistency, human-robot interaction, ROS2

1 Introduction

Autonomous serving, delivery, and guide robots are no longer confined to isolated industrial spaces; they now operate in corridors, lobbies, and sidewalks where people move freely. The central difficulty of such shared spaces is not static-obstacle avoidance but **interactive passing decisions** with people who continuously change position and intent. In narrow-corridor head-on encounters, situations where the robot overtakes a person or a person overtakes the robot, and crossing-style traversals, the robot must continually judge “which side to pass on, whether to proceed or yield, whether to stop.”

Widely used local planners (the DWA family [1], MPPI [3], TEB [2]) re-optimize a cost function at every control cycle. This greedy re-optimization is natural in static environments, but in ambiguous configurations where the costs of the two passing directions are similar, minor sensor noise or a small

movement by the person alone can flip the choice from one cycle to the next. As a result, the robot dithers side to side (oscillation) or, unable to commit to either side, comes to a stop — an outcome reminiscent of the freezing robot problem [10], whose original diagnosis is uncertainty growth rather than commitment failure. Oscillation is not only inefficient — it also prevents people from reading the robot’s intent, undermining both safety and trust. The problem is recognized in prior work. Topology-aware planners bias the choice toward the previously followed class through a soft topological-invariance cost [24], an implementation-level selection hysteresis [2], or a consistency parameter or weight on the previous homotopy class [25, 31]; SHINE introduces its weight explicitly because fast switching between topology classes can make navigation indecisive and non-social [31], and a related mechanism keeps the previous trajectory as a candidate so that pedestrians can discern a stable intention [35]. Opinion-dynamics methods go further: they make the passing side an explicit, stateful decision variable with analytical deadlock-breaking and opinion-formation guarantees [32], and opinion dynamics has been combined with vortex fields [34] and with dynamical-system modulation [33]. Concurrent work selects among discrete behaviors, including passing left and right, with a switching cost, a minimum dwell time and a relative switching-improvement threshold, under a hard safety filter [36]. Any selector with a minimum dwell time or a fixed selection period already bounds the rate at which the passing decision can flip, by construction. The gap addressed here is narrower: a commitment rule whose minimum interval between discretionary switches follows from leaky evidence accumulation rather than from a fixed dwell timer, stated together with a conditional bound on how soon a sustained advantage of a persistently selected challenger forces a switch (Section 2).

We study insufficient temporal inertia in the passing decision as one mechanism that can contribute to oscillation; this does not exclude perception, prediction, or interaction uncertainty as other causes. To overcome it, we introduce COMPASS, a decision-layer planner that adds explicit temporal consistency to the passing decision itself (Figure 3). The intuition mirrors human walking behavior: once a person decides which way to step aside, they tend to hold that direction, changing it only for a clear reason, and stopping immediately when it becomes dangerous. A related intuition — that committing to a passing direction aids mutual coordination — appears in the social-navigation literature as social momentum [12], and opinion-driven navigation forms a passing-side opinion through explicit decision dynamics [32]; COMPASS embodies the “hold a once-chosen direction” behavior as an explicit rule at the decision layer whose minimum interval between discretionary switches follows from the accumulator dynamics rather than from a fixed dwell timer.

Concretely, COMPASS makes three contributions.

1. **ID-indexed topological classes.** Topological passing classes relative to other agents are established in the literature, as joint braid classes of the multi-agent scene [38] and as pedestrian winding classes [24]; we bind the identity of such a class to a person’s track ID rather than to a flickering geometric gap, so that “the corridor chosen last cycle” can be re-identified at every cycle. The spawning, removal, merging, and splitting of `classes` caused by people entering, leaving, clustering, and separating are specified via explicit lifecycle rules and TTLs. These are design contracts that the current implementation only partially realizes (it uses input-order top- K labels) and that the reported experiments, which use fixed two-label inputs, do not exercise (§4.1, §5.4).
2. **Commitment switching rule with lexicographic safety.** The switching margin (hysteresis), dwell (persistence), and progress hardening (point of no return) are folded into a single leaky evidence accumulation equation. Its ingredients are standard: without the leak and with a constant threshold, the recursion is Page’s one-sided CUSUM statistic [39]; leaky accumulation of evidence toward a threshold is a classical model of perceptual choice [40]; and hysteresis switching with a bounded number of switches is established in supervisory control [41]. Our

additions are the use of such an accumulator as the commitment rule for a social passing decision and the progress-dependent threshold. Safety is placed lexicographically above the rule; this is standard priority arbitration [43, 44], included as a design element rather than claimed as a contribution. Discretionary changes are slowed relative to immediate argmin (“not rushed”), while the safety override is never delayed by commitment inertia (§4.3, §4.4).

3. **Formal properties with offline validation.** We state anti-oscillation (P1), switching-rate bound (P2), safety dominance (P3), maneuver completion (P4), and conditional finite-window escalation to HOLD (P5) as propositions. They are applications of standard arguments to this rule, not new mathematics; what we add is a statement, for the passing decision, of the assumptions each guarantee needs. The load-bearing anti-oscillation guarantee is P2, an elementary bounded-increment argument that gives the discretionary branch a dwell time in the sense of switching-system theory [42]: a deterministic lower bound of $N_{\min} = \lceil E_{\text{th}}(\rho)/((D_{\max} - \Delta_{\text{floor}}) dt) \rceil$ control cycles on the interval between consecutive discretionary switches for fixed dt and zero post-switch evidence, holding on every sample path under the range bound $D_k \leq D_{\max}$ that the $[0, 1]$ cost normalization of §4.2 supplies by construction, and informative under the declared design condition $E_0 > (D_{\max} - \Delta_{\text{floor}}) dt$ ($N_{\min} \geq 2$; Remark 10). Because P2 is an upper bound on the switching rate and says nothing about switches occurring, we pair it with a conditional response-time bound (Proposition 3): the finite deadline applies only while the same challenger remains selected and eligible, updates proceed without reset or HOLD, its advantage stays above the stated lower bound, and the clip/leak equilibrium has sufficient threshold headroom. P1 refines this, for i.i.d. challenger advantages, to an exponentially small per-cycle switching probability and per-unit-time switching rate; the proof dominates the rule pathwise by the Lindley (one-sided CUSUM) recursion [29, 39] and applies Kingman’s bound [30], with the exponent given by the exact Lundberg root θ^* of the increment law (the closed form $\theta^* \approx 2\Delta_{\text{floor}}/(\sigma_D^2 dt)$ is retained as tuning guidance only); the exponential form is conditional on that independence hypothesis (§4.6). P4 is proven, on top of the progress ρ dynamics and a lower bound on the lateral progress rate, via a reachable-upper-bound containment condition on the **challenger accumulator** e^{rev} . Verification is split into two tiers. The decision layer’s behavioral consistency, a decision-stream observer statistic, and cyclic latency are *measured* using an offline harness that drives the actual decision core, and reported in Section 5 (§5.3, §5.4); performance metrics requiring physical simulation or a real robot, along with external baselines and user studies, are left as planned evaluations specified via a protocol fixed in advance of measurement, which is not a formal preregistration (§5.6).

We evaluate COMPASS in an offline harness that drives the actual decision core over 5 reproducible encounter scenarios $\times$ 50 seeds against internal comparators and knob ablations. In the ambiguous-tie scenario, the immediate-argmin comparator changes its decision 98.16 times per 10 s encounter on average, whereas COMPASS keeps its commitment with zero changes; the 0.6 s simple-dwell comparator also records zero changes there, so this scenario separates filtering from no filtering rather than accumulation from dwell; across all 250 trials COMPASS averages 0.40 decision changes per encounter against 29.74 for argmin, and no trial exceeds one change (Tables 2 and 3). The ablations also contradict a design-stage hypothesis: removing the hysteresis margin or progress hardening alone produces no observed regression in this regime, so the leaky accumulator itself, rather than the margin or progress hardening, is the primary oscillation-suppression mechanism. A historical decision-core-only timing run gives p99 $58.6 \mu\text{s}$ and max $651.3 \mu\text{s}$ at $K = 3$ (8 classes); the max is about 1.30% of the 50 ms period at 20 Hz. These results establish the conditional decision rule and its offline behavioral consistency against internal comparators only. They do not measure physical safety, closed-loop behavior, human-perceived legibility, or comparison against external planners, a previous-class consistency weight [25, 31], or opinion-dynamics passing [32]; these remain the planned next step (§5.6).

2 Related Work

Local planners and trajectory optimization. DWA [1] selects a velocity command from a dynamic window at every cycle; each cycle’s selection is made anew, with no memory of previous decisions, so nothing in the scheme itself discourages the chosen side from flipping between cycles (a structural observation of ours, not a claim made in [1]). TEB [2] maintains and optimizes several topological alternatives in parallel; its ROS implementation adds a selection-cost hysteresis that discourages switching between alternatives, but this is an implementation-level heuristic — the formulation itself does not define commitment across cycles. MPPI [3] is a sampling-based MPC formulation; it does not treat the discrete structure of social passing decisions as first class. Unlike these, this paper places the temporal consistency of the passing-class choice itself at the core.

Social navigation and proxemics. The Social Force Model [4] describes pedestrian motion as interaction forces, and ORCA/RVO [5] formalizes reciprocal multi-agent collision avoidance; social-navigation work that addresses freezing models such human reactivity and cooperation explicitly [10, 21]. Proxemics [6] contributes qualitative, culture-dependent interpersonal distance zones, which robotics work has operationalized as cost fields — notably the asymmetric-Gaussian formulation of Kirby [7]. While these provide rich human models, the works cited in this paragraph do not treat the oscillation of the robot’s decision itself as a measurement target or design goal. This paper adopts such cost fields as input but addresses decision consistency on top of them.

HRI navigation — cooperation-aware planning and social momentum. Cooperation-aware navigation that jointly models robot and human trajectories in planning [21] addresses cooperative navigation amid dense crowds. In particular, social momentum [12] scores candidate actions by the angular momentum of the joint robot–human configuration to reconcile human–robot passing-side intentions and reinforce implicit coordination; it is a per-cycle objective rather than a persistent accumulator, but it articulates the intuition — committing to a passing side aids coordination — that this paper formalizes as an explicit scalar evidence accumulator. Metrics for human comfort and social appropriateness are undergoing standardization in social-navigation surveys [13, 14, 15], and this paper takes the axes of decision oscillation and legibility as its quantitative target among these.

Pedestrian trajectory prediction. Learning-based probabilistic predictors — Social-LSTM [16], Social-GAN [17], Trajectron++ [18] — predict a person’s future trajectory as a distribution. This paper adopts a Kalman constant-velocity prediction over a short horizon instead (assumptions and limitations in Sections 3 and 6), but these predictors can be incorporated into this decision layer as a **replaceable input module**. That is, this contribution is orthogonal to the choice of predictor: as more sophisticated prediction becomes available, only the mean-trajectory and covariance input need be replaced.

Topological path planning and passing-side consistency. H-signature-based enumeration of homotopy classes [8] rigorously represents the topological identity of a path but focuses mainly on static-obstacle topology; the branch that extends this topological view to moving-pedestrian environments is most relevant to this paper. Topological braids model the joint avoidance strategy of several agents, and a planner can then comply with the avoidance intentions inferred from their past behavior [38]. Dynamic Channel [28] is a real-time crowd-navigation framework that searches a triangulated spatial graph, combining pedestrian dynamics with topological-corridor selection; it picks one topology per planning cycle but does not formalize the temporal consistency of that choice via an explicit commitment rule or switching-rate guarantee. Winding Through [24] tracks the homotopy class the robot’s path holds relative to each pedestrian and penalizes changes to that class over time as a cost — being motivated by suppressing passing-side switches, it is among the closest prior work, but it operates as a soft topological-invariance cost internal to the planner and does not define a track-ID-indexed `class` lifecycle or a provable switching-rate bound. Topology-driven parallel trajectory optimization [25] runs local MPC optimizers constrained to different homotopy classes in parallel, ex-

ecutes the lowest-cost feasible trajectory in a receding-horizon manner while maintaining consistency of the chosen class, and is demonstrated on a mobile robot navigating among pedestrians — at the discrete selection step among the parallel optimizers it multiplies the cost of the previously selected trajectory by a consistency parameter $c_i \in [0, 1]$, and a sensitivity study reports the trade-off: with $c_i = 1$ (no preference for the previous class) the planner becomes infeasible more often, which the authors describe as indecisive. It uses no evidence accumulator and states no bound on switching frequency. SHINE [31] selects among topologically distinct guidance trajectories with a network trained on human motion data and reduces the selection cost of the homology class followed in the previous control period by a consistency weight, stating explicitly that fast switching between topology classes can lead to indecisive and ultimately non-social navigation. SHINE therefore treats decision oscillation in social navigation as a design problem; its remedy is a one-step, previous-class cost bias, and it does not state a bound on switching frequency. Zhou et al. [35] keep the previously selected trajectory as a candidate with a time-decaying weight, motivated by the observation that a high decision frequency, together with perception noise, can keep pedestrians from discerning a stable intention and cause oscillation. In multi-agent navigation, a learned planner can choose target winding numbers that a model-predictive controller then realizes [37], a decision–control split aimed at breaking symmetry deadlocks rather than at bounding switching. COMPASS differs from these mainly in making the cross-cycle commitment rule itself, rather than a per-cycle cost bias, the object of analysis, and in specifying `class` correspondence over time (lifecycle) against track identity.

Explicit passing-side decisions and opinion dynamics. Opinion-dynamics navigation makes the passing side an explicit decision state. Cathcart et al. [32] drive robot social navigation with nonlinear opinion dynamics in which the robot forms, over time, an opinion about which way and by how much to pass human movers crossing its path; they show analytically that when the robot’s attention exceeds a critical value, deadlock in decision making is broken and the robot rapidly forms a strong opinion, even with no bias or evidence for which way to pass, and they validate the deadlock-breaking results in human–robot experiments. Opinion dynamics has also been combined with vortex fields so that robot and humans reach a consensus on the direction of motion [34], and with dynamical-system modulation so that the robot chooses a passing side from onboard sensing, with simulation and human-participant experiments [33]. These methods are the closest prior work on a stateful, analyzed decision layer for the passing side. The formal target of Cathcart et al. [32] is the formation of a decision (deadlock breaking); that of COMPASS is the revision of a formed decision, over multi-person track-indexed labels. COMPASS has no comparable human or closed-loop evidence. Concurrently with this work, BIG-CBF [36] separates maneuver selection from safety enforcement: it selects among six closed-loop behaviors, including passing left and right, with a switching cost relative to the retained mode, a minimum dwell time and a relative switching-improvement threshold, gives a hard control-barrier-function filter final safety authority, and reports closed-loop simulation and physical-robot experiments. BIG-CBF thus covers mode retention, dwell and improvement gating, and safety priority, with much broader empirical evidence than this paper; it does not use an evidence accumulator, a progress-dependent threshold or track-indexed topological classes; it states no switching proposition, but its minimum dwell time and 0.5 s behavior-selection period bound mode changes by construction.

Change detection, switching logic, and arbitration. The mathematics used in this paper is standard. Page’s cumulative-sum (CUSUM) inspection scheme [39] accumulates the deviations of observations from a reference value and signals when the cumulative sum rises by a decision interval above its running minimum; in recursive form this is a sum reflected at zero. With the leak removed and a constant threshold, the accumulator of §4.3 is this statistic, written as Lindley’s queueing recursion [29], and the exponential bound of P1 is the classical tail bound for that recursion [30]. Leaky accumulation of evidence toward a threshold is a standard model of perceptual choice [40]. In supervisory control, hysteresis switching logic changes the active candidate only when its monitoring signal reaches $(1 + h)$ times the smallest one, for a hysteresis constant $h > 0$, and yields a bound on

the number of switches on an arbitrary time interval [41]; dwell-time switching separates consecutive switches by at least a prescribed interval, and an average dwell-time bounds the number of switches on any interval by a chatter bound plus a term linear in the interval length [42]. P2 is a dwell-time guarantee of this kind for the discretionary branch, obtained by an elementary bounded-increment argument. Finally, placing a safety behavior strictly above nominal behaviors is standard priority-based behavior arbitration [43], which has been extended with verification and fallback layers [44]. We use these results as tools and claim neither the accumulator nor its bounds as new mathematics.

Learning-based (IRL) approaches to socially compliant navigation. The line of work that learns socially compliant costs and prediction models from pedestrian trajectory features via maximum-entropy inverse reinforcement learning [26, 27] models human cooperative avoidance behavior as a trajectory distribution (including a mixture distribution over joint path choices), generating robot trajectories that conform to observed walking conventions. Their contribution is a learned cost/prediction model for trajectory generation; the works cited in this paragraph do not address decision-layer rules or switching-rate bounds that specify how often a discrete passing decision may legitimately flip from cycle to cycle. Learned topology selection differs in this respect: SHINE [31] explicitly treats fast class switching as a design problem (see the topological path-planning paragraph above).

F-formations and group awareness. The spatial arrangement people form during conversation/interaction (F-formation) was formalized by Kendon [19] via the concepts of o-space and p-space; treating such formations as “groups that must not be split” is a norm adopted in robot navigation, not part of Kendon’s own definition. In robot navigation, detecting and respecting F-formations has been treated as a core element of group-aware navigation [20]. Automatic F-formation detection itself is outside the scope of this paper and is assumed to be provided by an external perception module (details in §4.8). This paper extends the merge rule of §4.1 to interaction-based groups so as to avoid splitting F-formations (§4.8).

Legible and predictable motion. Legible/predictable motion [9] presents the view that robot motion should reveal intent to an observer. The commitment mechanism of this paper suppresses oscillation of the discrete decision label; we hypothesize that this can support legible motion, but this paper does not show it: the offline observer scores decision-label streams only (§5.1), and motion legibility is not measured. The methodology for human validation of legibility is elaborated via the observer model in §4.7 and the user-study protocol in §5.6.

Positioning. The problem of temporal consistency on the passing side has been recognized in prior work, with mechanisms of varying explicitness — a soft topological-invariance penalty [24], the selection-cost hysteresis in the ROS implementation of TEB [2], per-cycle topological-corridor selection [28] (one corridor is chosen each cycle, but no cross-cycle commitment is defined), the social-momentum objective [12], and previous-trajectory retention [35]. De Groot et al. [25] *do* formalize inter-cycle topological consistency: a consistency parameter trades off following the previously selected homotopy class against switching to a better one, and at one extreme enforces the previous class as long as it remains valid. Both de Groot et al. [25] and SHINE [31] apply previous-class consistency in navigation among pedestrians, SHINE for the stated purpose of avoiding indecisive navigation, and de Groot et al. [25] with a sensitivity study in which removing the previous-class preference makes the planner indecisive; at the extreme that keeps the previous class while it remains valid, discretionary switches are ruled out by construction. Opinion-dynamics methods make the passing side an explicit, stateful decision with analytical deadlock-breaking guarantees [32], and concurrent work combines passing-mode retention, dwell and relative-improvement gating, and a hard safety filter in closed loop [36]. The mechanisms and mathematics we use are also standard (see Change detection, switching logic, and arbitration above). Any minimum-dwell or fixed-period selector satisfies a deterministic inter-switch bound by construction: so do BIG-CBF’s minimum dwell time and 0.5 s selection period [36], the extreme setting of de Groot et al. [25] that keeps the previous class while it remains valid,

and the 0.6 s (12-cycle) simple-dwell comparator of §5.1, a continuous-persistence timer that, after a switch, needs 12 consecutive cycles of challenger advantage before it can switch again. At the default knobs, that comparator’s bound is stronger than P2’s worst case of 3 cycles (0.15 s; Remark 10). The delta is therefore not the existence of a bound but its source and its pairing with a response-time bound; it is narrow, and we state it precisely: (i) a leaky, CUSUM-type evidence accumulator with a progress-dependent threshold, used as the commitment rule for a social passing decision; (ii) an inter-switch bound for that decision that is derived from the accumulator dynamics, with no fixed dwell timer — the deterministic, pathwise bound P2 — paired with the conditional response-time bound of Proposition 3 and the conditional exponential refinement P1, each stated with the assumptions it needs; and (iii) a track-ID-indexed **class** representation with explicit lifecycle rules (spawn, removal, merge, split, TTL). Unlike per-cycle class selectors [2, 28, 25, 31], it indexes classes by person identity. Winding Through [24] already tracks passing-side consistency relative to each pedestrian over time, so on point (iii) the only difference from it is the explicit lifecycle specification, a design contract that the current implementation only partly realizes and that the experiments do not exercise. Separately, we release an open ROS 2 Nav2 controller plugin and an offline harness; its ablations indicate that, in the tested regime, the accumulator rather than the margin or progress hardening carries the oscillation suppression. This is a released artifact, not a novelty claim. We claim neither the individual mechanisms nor the mathematics as new, and we have not compared against consistency-weight, opinion-dynamics or dwell-plus-relative-improvement baselines (Section 6).

3 Problem Formulation

Layer separation. We separate social navigation into three layers. (i) The **decision layer** — the layer that determines discrete intents such as which side to pass on, and whether to yield, proceed, overtake, or stop. (ii) The **trajectory layer** — the layer that instantiates a given decision as a curvature-continuous (G^2) trajectory. (iii) The **presentation layer** — the layer that visually reveals the planned trajectory to people (e.g., an AR overlay). The contribution of this paper lies entirely in the **decision layer**; the ideal trajectory interface is a design assumption, not an end-to-end validation claim for the current adapter (implementation scope below).

Notation. Let k denote the control cycle and dt the cycle interval. Let $\mathcal{C}_k$ denote the set of candidate topological **classes** at cycle k , and let $J_k(c) \in \mathbb{R}^+ \cup \{\infty\}$ denote the representative trajectory cost of class c (∞ when unavailable). Let c_{k-1}^* denote the previously committed **class**, and let $\mathcal{S}_k = \{c \in \mathcal{C}_k : \text{Safe}_k(c)\}$ denote the safe/available set. Prediction of person i is provided by a Kalman constant-velocity estimator, giving a mean trajectory $\hat{p}_i(t)$ and covariance $\Sigma_i(t)$, where $\Sigma_i(t)$ grows with the prediction horizon.

Assumptions and scope. (a) Planar (2D) navigation. (b) A short prediction horizon $[0, T]$ (typically 2–4 seconds). (c) Person tracking and data association are provided by an external module. (d) The trajectory generator, given a **class**, corridor, and target speed, is assumed capable of generating a trackable trajectory and of realizing a commanded **cross-track progress rate** of at least $v_{\text{lat},\min} > 0$ (used in P4). Here $v_{\text{lat},\min}$ is not the vehicle body’s lateral (swerve) velocity but the per-unit-time progress rate of the cross-track coordinate toward the planned lateral offset; for non-holonomic drives (differential, Ackermann) it is realized as the product of forward speed and steering (curvature), while for holonomic drives it is realized as a direct lateral-velocity component. Hence $v_{\text{lat},\min} > 0$ presupposes forward clearance and a positive forward speed. (e) Pedestrian passing conventions (e.g., right-side passing) are a locale setting and are not assumed to be a universal constant (Sections 4.2, 5).

Objective. We design a decision policy that prioritizes the supplied safety/availability predicates at every active decision cycle and bounds discretionary decision changes. Physical safety, motion legibility, goal progress, and social comfort require independent validation and are not guaranteed by

branch priority.

4 Method

4.1 Enumeration of topological classes and cross-cycle correspondence

Enumeration. We index the K relevant agents (typically 1–3) within the radius of influence and prediction horizon by track ID. The **class** label is defined as a vector of left/right passing signs over each relevant agent. The lifecycle and winding-sign procedures below are intended design contracts; the current input-order top-K implementation is distinguished explicitly at the end of this subsection and in §5.4.

$$c = (s_{\text{id}_1}, \dots, s_{\text{id}_K}), \quad s \in \{L, R\} \quad (1)$$

Among the up to 2^K combinations, any combination whose corresponding corridor width is narrower than the sum of the robot’s width and the safety margin is immediately pruned with $J = \infty$. This corridor-width comparison presupposes a **circular-footprint approximation** (treating the robot’s width as an orientation-independent constant); for elongated rectangular footprints, the occupied area varies with orientation during rotation, making pruning and availability decisions conservative, which we discuss separately in Section 6 (cross-referenced as rectangular-footprint conservatism). The left/right sign of each **class** is computed from the winding sign (cross-product integral or H-signature integral) by which the representative path winds around the predicted human positions. Front/rear (temporal-axis) passing is not treated as a separate **class** but handled through the asymmetric social cost of Section 4.2. A more rigorous spatiotemporal homotopy extension is discussed as future work in Section 6. The combinatorial explosion of enumeration and the analytical bound on the number of effective **classes** after pruning are analyzed in Section 5.4.

Cross-cycle correspondence (key). For “retain the previous c^* ” to be meaningful, c^* must be re-identified every cycle. Because **class** identity is bound to track IDs rather than geometry, correspondence reduces to label matching such as “right of agent #7, left of agent #12,” which rides for free on IDs already provided by the tracking module. The design specifies the following lifecycle rules (Fig. 1).

- **Creation** (a relevant agent enters, or a new corridor appears): a new **class** appears as a challenger but starts from evidence $e = 0$, so there is no immediate jump.
- **Extinction** (a relevant agent leaves): the corresponding dimension is removed from all labels. If c^* was distinguished solely by that person, it is absorbed into a coarser **class**; progress ρ is retained if the actual path is unchanged, and reset if it changes.
- **Temporary unavailability** (corridor closes, $J = \infty$): identity is retained but passage is momentarily blocked. If c^* is affected, the safety override takes over, and the identity is remembered for a short TTL so that a momentary flicker does not break the commitment.
- **Merge** (two people form one cluster): the two dimensions collapse into one, leaving only the sign shared by both sides, with “between” becoming ∞ . The old c^* is mapped to the surviving coarser **class**. Merge decisions use not only spatial proximity but also interaction cues (mutual stillness, mutual orientation, sustained proximity); details are given in §4.8.
- **Split** (a cluster separates): the reverse process — the old c^* is mapped to the child that is consistent with the robot’s current lateral offset and heading.

These lifecycle rules specify the intended correspondence layer. The current decision-core enumeration constructs labels for the first K_{cap} input tracks; the presence of label operations does not establish an integrated TTL, merge/split, winding-sign, or group-lifecycle manager. The offline two-label harness holds track identity fixed, so it validates neither those lifecycle rules nor their effect in a tracker. The accumulator is the implemented and measured temporal decision mechanism.

Class lifecycle across encounter events (Sec. 4.1): class identity is bound to track ID, not geometry;
TTL bridges momentary unavailability so identity survives brief gap closures

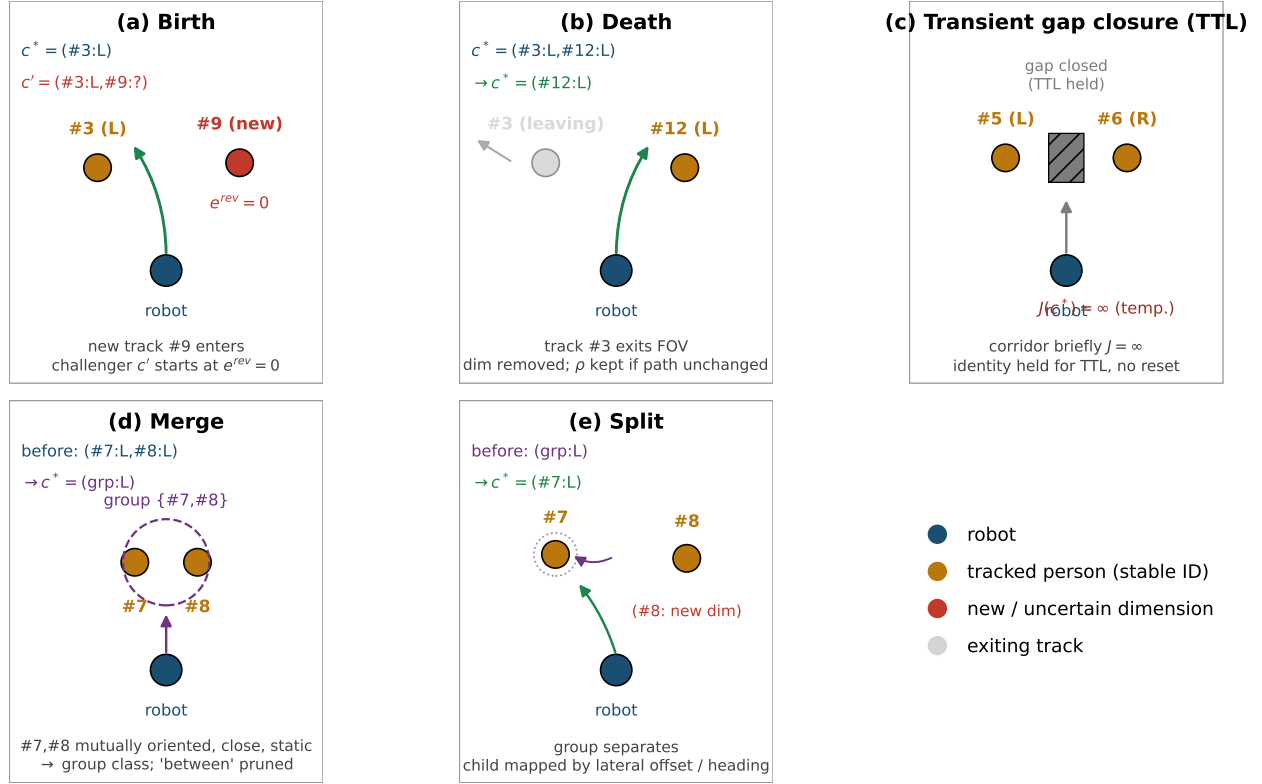


Figure 1: Schematic of the five lifecycle events of a topological class: (a) Creation — a new track appears as a challenger, starting from $e^{\text{rev}} = 0$; (b) Extinction — when a track leaves, the corresponding dimension is removed (ρ is retained if the path is unchanged); (c) Temporary unavailability — even when a corridor momentarily becomes $J = \infty$, identity is retained for a TTL to prevent a reset; (d) Merge — two people judged by interaction cues (mutual orientation, proximity, low speed) merge into a single group class; (e) Split — a group separates, mapped to the child class consistent with the robot's lateral offset and heading. This emphasizes that class identity is bound to human track IDs rather than geometry.

4.2 Cost function $J(c)$

The cost of each `class` is defined as a weighted sum integrated over the horizon $[0, T]$ along the representative trajectory τ_c .

$$J(c) = w_g J_{\text{goal}} + w_s J_{\text{social}} + w_e J_{\text{effort}} + w_r J_{\text{rule}}, \quad J(c) = \infty \text{ if unavailable} \quad (2)$$

- **Progress J_{goal} .** Distance from the local goal g at the end of the horizon: $J_{\text{goal}} = \|p_r(T) - g\|$. This penalizes detour/stopping `classes`.
- **Asymmetric social cost J_{social} .** A proxemics cost field is laid over each person and integrated for intrusion (Fig. 2).

$$J_{\text{social}} = \sum_i \int_0^T g_i(p_r(t), t) dt \quad (3)$$

$$g_i(p, t) = \exp\left(-\frac{1}{2} \delta^\top M_i(t)^{-1} \delta\right), \quad \delta = p - \hat{p}_i(t) \quad (4)$$

$$M_i(t) = R_i(t) \text{diag}(\sigma_h^2, \sigma_s^2) R_i(t)^\top + \Sigma_i(t) \quad (5)$$

Here the heading component σ_h is set to be front/rear asymmetric (σ_{front} for the front half-plane, σ_{rear} for the rear). This makes the cost of cutting in front of a person differ from that of passing behind them, so that the choice of passing side aligns with social norms. σ_{rear} **appears in two distinct mechanisms in this paper and must be distinguished.** (i) As the base shape of the cost-field asymmetry, $\sigma_{\text{front}} > \sigma_{\text{rear}}$ (the static shape in which the front personal-space region is wider than the rear), and (ii) as a contextual upward adjustment in the overtaking regime (a dynamic adjustment that deliberately raises the rear cost to suppress the surprise of a blind-spot approach) — these are distinct operating principles: the former induces yielding to the rear in head-on encounters, and the latter suppresses rear approach during overtaking/close passing. In addition, the predictive covariance $\Sigma_i(t)$ is added to the cost field, so that the personal-space ellipse widens further into the future and the robot gives wider berth accordingly. σ_s determines the lateral width. Which of σ_{front} or σ_{rear} applies to a given person is computed from that person’s heading and the robot–person relative motion. That is, σ_{front} is applied in the head-on-encounter regime where the robot crosses the person’s front half-plane, and σ_{rear} is applied in the overtaking regime where the robot enters the person’s rear half-plane; half-plane assignment is determined by projecting δ into local coordinates referenced to the person’s heading. **Here, the σ_{rear} regime switch (head-on encounter $\leftrightarrow$ overtaking) is not driven by a separate variable but by the same variable as the rear half-plane projection judgment above (the sign of δ ’s local projection onto the person’s heading) — that is, the selection of the cost-field asymmetry and the assignment to the overtaking regime are consistently derived from a single judgment.**

Parameter grounding and locale configurability. σ_{front} , σ_{rear} , σ_s , and the passing-side preference are not treated as universal constants but as **locale/culture configuration values**. The basic form of the asymmetric Gaussian proxemics is grounded in Kirby [7], and the forward-extended shape draws on Hall’s personal-space zones [6] and the social navigation survey [20]. However, we do not adopt the unconditional assumption that “passing behind is always preferable.” Since approach from a person’s blind spot (rear) can plausibly induce surprise or discomfort — a design consideration this paper adopts, rather than a finding reported in the surveys cited above — this cost exposes σ_{rear} as a **context-dependent knob**, so that (i) rear yielding is preferred in head-on encounters, while (ii) the rear cost is raised during overtaking/close passing

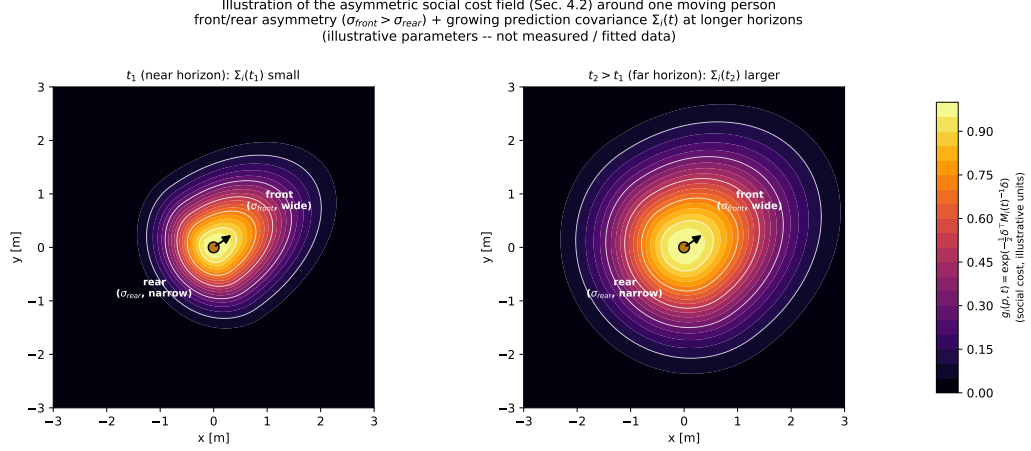


Figure 2: Illustrative visualization of the asymmetric social cost field of §4.2, $g_i(p, t) = \exp(-\frac{1}{2} \delta^T M_i(t)^{-1} \delta)$ (a schematic based on the formula, not measured data). Left: near horizon t_1 (small predictive covariance $\Sigma_i(t_1)$); right: far horizon $t_2 > t_1$ ($\Sigma_i(t_2)$ grows, expanding the personal-space ellipse). Both panels show the front/rear asymmetry $\sigma_{\text{front}} > \sigma_{\text{rear}}$ (front personal space wider than rear), with half-plane assignment determined by projecting δ into local coordinates referenced to the person’s heading.

to suppress blind-spot entry. The passing-side preference is locale-dependent and configurable (e.g., some pedestrian environments are reported to favor the right, others the left, or a mix). For an experimental study of a single population (Bordeaux, France) showing that avoidance-side conventions in pedestrian crowds can emerge through self-organization, see [23]; however, since that study is not a cross-cultural comparison, we do not extrapolate it as direct evidence that “the passing side varies by culture”; this paper takes the conservative choice of not fixing the passing side as a universal constant but separating it out as a `locale.keep_side` $\in \{\text{right}, \text{left}, \text{none}\}$ setting. The design of the sensitivity analysis for these parameters is described in §5.5, and their measurement is left to the planned evaluation (§5.6).

- **Effort/smoothness** J_{effort} . $J_{\text{effort}} = \int_0^T (\alpha \kappa^2 + \beta a^2 + \gamma \dot{\kappa}^2) dt$. The κ (curvature rate) term induces G^2 continuity, which directly benefits smooth tracking and the curvature display of the presentation layer.
- **Rule** J_{rule} . A soft penalty for pedestrian traffic conventions (preference per `locale.keep_side`) and lane keeping. The design of the sensitivity curve for the weight w_r is given in §5.5.

Hard availability. $J = \infty$ if any of the following holds: static collision ($d_{\text{obs}} < r_{\text{safe}}$), insufficient corridor width, violation of kinematic limits, or violation of the hard safety distance d_{safe} from a predicted person. This is a dual structure in which soft discomfort is handled by J_{social} while physical/safety constraints are handled by hard availability.

Normalization, range, and units. For each term X , choose finite calibration bounds with $J_X^{\text{max}} > J_X^{\text{min}}$ and use $\hat{J}_X = \text{clip}((J_X - J_X^{\text{min}})/(J_X^{\text{max}} - J_X^{\text{min}}), 0, 1)$. With nonnegative finite weights, available finite costs satisfy $0 \leq J = \sum_X w_X \hat{J}_X \leq \sum_X w_X$, so $|D_k| \leq \sum_X w_X$. Unavailable classes are excluded from discretionary comparison; their infinite cost is not an admissible accumulator input. This bound is a property of the normalized cost path, not of arbitrary externally supplied `step_evals` inputs.

Fixed pre-calibrated constants preserve the meaning of normalized advantage across cycles. If cost units are rescaled, the calibration constants must co-transform to preserve affine invariance; that

can be done for fixed constants as well as per-cycle statistics. Per-cycle min–max statistics instead change the raw-cost margin with the candidate range: a narrower range requires a *smaller*, not larger, raw-cost difference to exceed the same normalized Δ_{floor} . That changes its semantic interpretation, but P2 still holds whenever its stated normalized advantage bound holds. P1 separately requires its explicit distributional hypotheses.

J , D_k and Δ_{floor} are dimensionless under normalized weights. Because updates multiply by dt measured in seconds, evidence e , E_0 and e_{max} have normalized-cost-second units; λ , k_ρ , ρ and p are dimensionless, and θ^* has reciprocal-evidence units. Hence θ^*E_0 is dimensionless. The value $\Delta_{\text{floor}} = 0.05$ is five percent of one unit-weight normalized term, not five percent of the full weighted range when $\sum_X w_X = 2.8$. The numerical knob values and reported experiments are unchanged by making these units explicit.

4.3 Commitment switching rule

Let the challenger be $c'_k = \operatorname{argmin}_{c \in S_k, c \neq c^*} J_k(c)$, and the challenger advantage $D_k = J_k(c_{k-1}^*) - J_k(c'_k)$. We fold the margin, dwell, and progress hardening into a single leaky-evidence-accumulation equation.

$$e_k = \operatorname{clip}(\lambda e_{k-1} + (D_k - \Delta_{\text{floor}}) dt, 0, e_{\text{max}}) \quad (6)$$

$$\text{Switching condition: } e_k \geq E_{\text{th}}(\rho_k) \quad (7)$$

$$E_{\text{th}}(\rho) = E_0 \cdot (1 + k_\rho \rho^p), \quad p \geq 1 \quad (8)$$

$$\rho_k = \operatorname{clip}\left(\frac{|\text{realized cross-track progress}|}{|\text{planned lateral offset of } c^*|}, 0, 1\right) \quad (9)$$

This is the design definition of ρ . The default implementation does not measure its numerator: it uses a forward-speed progress *proxy* ($L_{\text{real}} += |v_{\text{cmd}}| dt$ with a fixed normalization $L_{\text{plan}} = 1.0$ m), and realized cross-track progress is an opt-in adapter mode (§4.5). Here Δ_{floor} is the instantaneous margin (a dimensionless fraction of the normalized range per §4.2; advantage beyond this is dissipated by leak $\lambda \in (0, 1]$), E_{th} is the persistence requirement (dwell), and $k_\rho \rho^p$ is progress hardening (point of no return). An equivalence relation gives intuition. If $\lambda = 1$ and the advantage is a constant $\bar{D} > \Delta_{\text{floor}}$, then e grows as $(\bar{D} - \Delta_{\text{floor}})t$, switching at $t = E_{\text{th}}/(\bar{D} - \Delta_{\text{floor}})$; hence the larger the advantage, the faster the switch (proportional urgency), and as $E_{\text{th}} \rightarrow 0^+$ this reduces to a pure margin, while a large E_{th} means a long dwell. When the challenge target changes (c' changes), we reset $e \leftarrow 0$, and at the moment of switching/committing, we reset $e \leftarrow 0, \rho \leftarrow 0$.

Here, Δ_{floor} is a dimensionless switching margin under the normalization premise of §4.2, and its absolute meaning is held constant across cycles only when the normalization constants are fixed as pre-calibrated constants (time-invariance of the normalization map) (see the drift analysis in §4.2). If per-cycle min–max statistics are used, the effective margin of the same Δ_{floor} drifts with the candidate set, so care is needed in interpreting margin-dependent statements such as the safety dwell and the switching-rate lower bound.

The linear case ($p = 1$) hardens uniformly, while the superlinear case ($p > 1$) is a “point of no return”-emphasizing form that allows slack through the middle of the maneuver but locks sharply near the end.

Relation to CUSUM and hysteresis switching. With $\lambda = 1$, a constant threshold E_0 , no upper clip and no resets, the accumulation recursion above is Page’s one-sided CUSUM statistic [39] for the challenger advantage, with reference value Δ_{floor} , increments scaled by dt , and decision interval E_0 , written as Lindley’s recursion [29]; the proof of P1 uses exactly this companion recursion. For $\lambda < 1$ the rule is a rectified, leaky variant rather than Page’s statistic itself (leaky accumulation of evidence toward a threshold is also a standard model of perceptual choice [40]), and the progress-dependent threshold $E_{\text{th}}(\rho)$ and the challenger-reset semantics are specific to this rule. The rule is

also related to hysteresis switching in supervisory control [41], which changes the active candidate only when its monitoring signal reaches a fixed multiple of the smallest one and bounds the number of switches on any interval. We use this lineage as design background; the properties of §4.6 apply standard arguments to this particular recursion.

Challenger tie-breaking. If $c'_k = \text{argmin}$ is not unique (two challengers' normalized costs are tied within numerical tolerance ε), the argmin can waver from cycle to cycle, and the $c' \neq \text{prev}_{c'}$ reset becomes a new source of oscillation that disturbs the accumulator. To prevent this, when tied, we fix a single challenger by the following **deterministic priority order**.

1. **Prefer the previous challenger.** If the previous cycle's c' ($\text{prev}_{c'}$) is in the current tied set, select it (temporal consistency of challenger identity). Because this priority rule applies only within a set of costs tied within the exit threshold ε_{out} , choosing $\text{prev}_{c'}$ costs no more than ε_{out} (the hysteresis exit threshold) relative to the optimal challenger — i.e., it does not sacrifice more than ε_{out} of optimality (consistent with the $\varepsilon_{\text{in}} < \varepsilon_{\text{out}}$ entry/exit hysteresis in the paragraph below).
2. **Topological distance from c^* .** Otherwise, select the challenger with the **smaller** label Hamming distance (number of differing signs) from the current commitment c^* (preferring the adjacent **class** with lower switching cost).
3. **Deterministic lexicographic order.** If still tied, select the smallest by lexicographic order of **class** labels (ascending ID, with $L < R$ at each position).

Because this rule is deterministic, c' does not waver across cycles within a tied configuration, eliminating the artificial oscillation caused by accumulator resets. Meanwhile, $e \leftarrow 0$ fires only when c' genuinely changes (an advantage reversal, not a tie).

Hysteresis at the tie boundary itself. Because boundary chattering can also occur at the tie threshold ε itself (if the cost difference wobbles near ε , “tied $\leftrightarrow$ untied” can flicker across cycles), we place entry/exit hysteresis on the ε boundary. That is, we separate the threshold ε_{in} at which two challengers **enter** a tied set from the untied state and the threshold ε_{out} at which they **exit** the tied set, with $\varepsilon_{\text{in}} < \varepsilon_{\text{out}}$, so that once a pair of challengers is bound as tied, they are only released as untied when their cost difference exceeds ε_{out} . This blocks the secondary oscillation in which the tiebreak's own activation/deactivation wobbles at the boundary.

Conservatism trade-off of the safety dwell. The safety dwell and progress hardening of §4.4 reduce oscillation by delaying switching, but at the cost of equally delaying the response when a genuinely better alternative appears. That is, increasing $\Delta_{\text{floor}} \cdot E_0 \cdot k_\rho$ strengthens anti-oscillation but increases the delay of legitimate replanning (conservatism), and this trade-off's operating point is tuned via the sensitivity analysis of §5.5.

4.4 Safety override

Safety/availability is judged by $\text{Safe}_k(c) = [\text{clearance} \geq d_{\text{safe}}] \wedge [\text{TTC} \geq \text{TTC}_{\text{min}}] \wedge [\text{kinematically feasible}]$. If the committed c^* leaves the safe set, all accumulation and hardening from §4.3 are entirely disregarded (margin is zero in an emergency), and the system drops down the following ladder.

1. Switch to a safe alternative **class** (if one exists).
2. Otherwise, decelerate to buy time.
3. If still hazardous, stop and yield (this is a commanded fallback; collision freedom additionally depends on braking and the environment).

Hysteresis on the safety branch itself. If the safety ladder chatters at stage 1 (switching) — i.e., high-frequency repeated safety switches — this itself becomes a new source of oscillation. To prevent this, we also impose minimal hysteresis on the safety branch. (i) **Safety dwell.** During a brief protection window $T_{\text{safe_dwell}}$ immediately following a safety switch, further safety switches are blocked; if the violation persists, the system falls straight through to stage 2 (deceleration). That is, “if a safety switch was just attempted and safety is immediately violated again,” the system does not chatter at stage 1 again but transitions to **deceleration priority**. (ii) **Deceleration-priority condition.** If the number of qualifying safety interventions within the rolling window reaches a threshold (a partial threshold of N_{thrash} below), stage 1 is skipped and the system starts directly from stage 2. These conditions suppress repeated safety switching while active; as windows expire or the environment changes, they do not imply globally monotone mode descent.

Thrash guard. A qualifying event is an invocation of the unsafe-commitment branch, including interventions that decelerate without changing class. At most one event per decision time is retained in $(t - W, t]$. If this count reaches N_{thrash} , the controller enters zero-command HOLD and retains it until explicit external release; this is not a deadlock-recovery guarantee. The release operation clears mode/window/dwell state. Any re-commit and progress re-anchoring are separate state operations, not an implicit effect of release.

4.5 Integrated algorithm and trajectory interface

Algorithm 1 COMPASS decision-layer control cycle (Fig. 3)

```

1: State:  $c^*, e, \rho, L_{\text{real}}, L_{\text{plan}}$ , event deque  $Q$ ,  $\text{prev}_{c'}$ , dwell expiry, mode
2: for each cycle at time  $t_k$  with interval  $h_k$  do
3:    $\mathcal{C} \leftarrow$  class enumeration; evaluate normalized  $J(c)$  and safe/available set  $\mathcal{S}$ 
4:   if mode = HOLD then
5:     output zero command; continue ▷ explicit release required
6:   end if
7:   if  $c^* \notin \mathcal{S}$  then ▷ [Safety]
8:     Record  $t_k$  once in  $Q$ ; remove  $\tau \leq t_k - W$ ;  $n_{\text{thrash}} \leftarrow |Q|$ 
9:     if dwell protection active or  $n_{\text{thrash}} \geq \max(1, \lfloor N_{\text{thrash}}/2 \rfloor)$  then
10:       $v_{\text{target}} \leftarrow \max(0, v_{\text{in}} - a_{\text{brake}} h_k)$  ▷ interval-scaled speed bound
11:    else if  $\mathcal{S} \neq \emptyset$  then
12:       $c^* \leftarrow \text{TIEBREAK}(\mathcal{S})$ ;  $e, \rho, L_{\text{real}} \leftarrow 0$ ; dwell expiry  $\leftarrow t_k + T_{\text{safe\_dwell}}$ 
13:    else
14:       $v_{\text{target}} \leftarrow \max(0, v_{\text{in}} - a_{\text{brake}} h_k)$ 
15:    end if
16:    On a braking branch with  $\text{TTC} < \text{TTC}_{\text{stop}}$ , set mode  $\leftarrow$  STOP
17:    if  $n_{\text{thrash}} \geq N_{\text{thrash}}$  then
18:      mode  $\leftarrow$  HOLD;  $v_{\text{target}} \leftarrow 0$ 
19:      If  $\mathcal{S} \neq \emptyset$ , select its least-cost class and reset  $e, \rho, L_{\text{real}}$  and dwell
20:    end if
21:    output safety result; continue ▷ no progress update on this branch
22:  end if
23:  if  $\mathcal{S} \setminus \{c^*\} \neq \emptyset$  then ▷ [Discretionary]
24:     $c' \leftarrow \text{TIEBREAK}(\mathcal{S} \setminus \{c^*\}, \text{prev}_{c'}, c^*)$ ;  $D \leftarrow J(c^*) - J(c')$ 
25:    if  $c' \neq \text{prev}_{c'}$  then  $e \leftarrow 0$ 
26:    end if
27:     $e \leftarrow \text{clip}(\lambda e + (D - \Delta_{\text{floor}}) h_k, 0, e_{\text{max}})$ 
28:    if  $e \geq E_0(1 + k_{\rho} \rho^p)$  then  $c^* \leftarrow c'$ ;  $e, \rho, L_{\text{real}} \leftarrow 0$ 
29:    end if
30:     $\text{prev}_{c'} \leftarrow c'$ 
31:  end if
32:  Update progress using the declared measured-displacement or legacy-proxy contract
33:  output  $\{c^*, v_{\text{target}}, \text{mode}, \text{safety velocity limit}\}$  to the command adapter
34: end for

```

The implementation is a `nav2_core::Controller` plugin (`compass_nav2::CompassController`) for ROS2 Nav2 [11], hosted by the `controller_server`. One decision cycle executes per `computeVelocityCommands` call; the cycle rate is set by the `controller_server`'s `controller_frequency` parameter (20.0 Hz in the example configuration); the costmap comes from `Costmap2DROS`, and human tracks are received via a subscription to `/people` (`compass_msgs/People`). The plugin complies with the Nav2 lifecycle contract (`configure/activate/deactivate/cleanup`), outputs `TwistStamped`, and maintains corresponding state (labels, e , ρ , $\text{prev}_{c'}$, safety dwell and intervention-window state) across cycles.

Implemented opt-in scope and evidence versions. The reported R1/R5 experiments use the legacy scripted-cost entry point, fixed two-label inputs, default knobs, and the historical forward-speed progress proxy. Corrected observer outputs are regenerated from the unchanged decision streams;

COMPASS conceptual blocks (safety evaluated before switching)

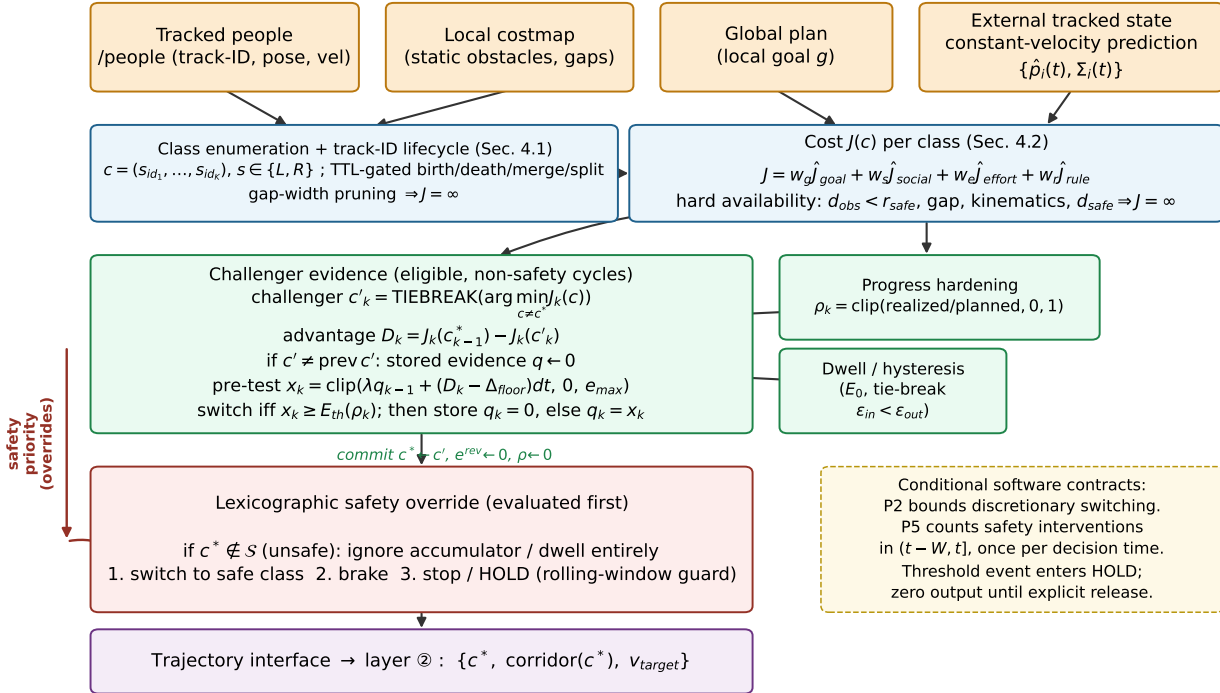


Figure 3: Conceptual blocks of the COMPASS decision layer, not a literal execution-order flowchart. Tracked-person, costmap and plan inputs feed class/cost evaluation; safety has priority over discretionary evidence. The diagram distinguishes pre-test evidence x from stored post-reset evidence q and shows P5’s conditional rolling-window HOLD contract. The integrated pseudocode specifies the actual control order.

R3 is a separate historical decision-core latency measurement, not a benchmark of the newly added adapter. The new options `use_measured_progress` and `use_candidate_trajectories` default to false. Measured progress uses signed pose displacement on a frozen path normal; invalid intervals fail explicitly, a commitment change discards the previous maneuver’s increment, and changed plan geometry re-anchors progress. In this opt-in mode L_{plan} is the planned lateral offset of the committed class, fixed when its epoch is anchored: the path tracker’s equilibrium offset $k_{\text{side}}|\bar{s}|/k_e$ toward the class side, where $\bar{s} \in [-1, 1]$ is the mean pair sign ($L = +1, R = -1$) that the tracker’s side-bias term itself uses (0.133 m at the default gains for a single-side class and one third of that for two people passed on one side and one on the other; a balanced class has $\bar{s} = 0$, no side, and is rejected by the estimator) minus the anchor’s signed offset from the path, plus progress already credited to the same commitment. A non-positive value means no lateral maneuver and keeps $\rho = 0$ rather than dividing by a near-zero length. It is not a general multi-person progress estimator, and neither the planned-offset model nor its effect on closed-loop behavior has been validated. The default remains the forward-speed proxy with $L_{\text{plan}} = 1.0$ m: all reported R1/R5 results, the paired responsive-profile sweep, and the scripted unicycle diagnostic use their historical progress inputs with that fixed normalization, so they are sensitivities of the proxy, not evaluations of the measured estimator. Making measured progress the default and evaluating it in closed loop remain open.

The optional candidate path evaluates and executes a matched one-second unicycle rollout with a circular-footprint costmap proxy and constant-velocity person prediction. Empty, invalid, unsupported

Table 1: System interface and implementation contracts. Frame rejection applies in every controller mode, not only the research options.

Interface	Contract details
/people	<code>compass_msgs/People</code> , received asynchronously and consumed as the latest value at cycle start. Message-frame tracks are transformed to the costmap global frame via <code>tf2</code> ; transform failure drops all tracks from that message. <code>SensorDataQoS</code> : best-effort, volatile, keep-last depth 5. Last-value retention has no age cutoff; absent input yields zero people, not a freshness or safety guarantee.
Costmap	<code>Costmap2DROS</code> , shared with <code>controller_server</code> , in its global frame. Queried synchronously within the controller cycle; freshness depends on the costmap’s own update rate.
Pose and plan	The current pose header and nonempty <code>nav_msgs/Path</code> header must match the costmap global frame in all modes. A mismatch returns a zero command; there is no silent pose/plan frame conversion. <code>setPlan</code> replaces the plan, which is then retained until another update.
Decision cycle	One <code>computeVelocityCommands</code> call. Configured <code>controller_frequency</code> : 20.0 Hz. The actual dt is the measured inter-call interval, with a 0.1 s fallback on the first cycle or a non-advancing clock; the configuration alone does not verify a fixed interval.
Output	One <code>geometry_msgs/TwistStamped</code> per call, with the input pose frame in its header. The adapter enforces STOP/HOLD as zero motion and applies the declared safety speed bound; these are command contracts, not physical stopping guarantees.

mixed-side, unknown-map and out-of-map candidates fail closed. A changed braking speed requires regeneration and revalidation before command emission. This supplies bounded candidate-specific cost and command plumbing, not a proof that the rollout realizes each label’s homotopy or satisfies the ideal G^2 generator, group-lifecycle, sensing-freshness, braking-distance or P4 actuation assumptions. The safety speed bound subtracts $a_{\text{brake}}h_k$, with a_{brake} expressed as acceleration and h_k the validated cycle interval; command limiting is not a physical braking-distance guarantee. STOP/HOLD are enforced as zero commands by the adapter. Source/configuration and software-test limits are documented in `docs/CANDIDATE_TRAJECTORIES.md` and `src/compass_eval/RESPONSIVENESS.md`.

The separate research profile sets $k_\rho = 0.5$, lowering the maximum threshold to $0.45 < e_{\text{max}} = 0.50$. For persistent selected advantage $D \geq 0.40$ at $dt = 0.05$, $\lambda = 0.97$, and uninterrupted updates, the response bound is 49 cycles (the software helper conservatively returns 50). It does not satisfy the default profile’s interior permanent-lock containment for that advantage range. The 3,750-run paired scripted sweep and deterministic scripted-cost unicycle diagnostic are supplementary software evidence; neither is a Gazebo/robot experiment, an independent physical oracle, or evidence for the new candidate path retroactively. Their original inputs and result sets remain separately identified.

System interface of the decision layer. Table 1 transcribes the interface contract directly from the implementation code.

Here dt is not a fixed constant but the measured inter-call interval (distinct from the offline harness’s fixed $dt = 0.05$ s in §5.1), and the absence of a message-age cutoff for `/people` is a fact of the implementation as-is — the TTL of §4.1 is the TTL of `class` identity, a separate mechanism from this. Meanwhile, end-to-end pipeline characteristics — executor scheduling jitter, rmw/DDS queueing, TF delay, costmap update concurrency, `controller_server` dispatch overhead, and the effect of input-freshness handling — are not characterized in this paper; their measurement belongs to the planned evaluation (§5.6).

4.6 Property analysis

We state five properties as propositions. P1, P2, and P4 include proofs; P3 and P5 are argued. None of them is new mathematics: P2 is an elementary bounded-increment argument that gives the discretionary branch a dwell time in the sense of switching-system theory [42]; P1 applies the classical exponential tail bound for the Lindley (one-sided CUSUM) recursion [29, 30, 39] after a pathwise domination step; and P3 and P5 are branch-priority and guard contracts. What this subsection contributes is a statement, for this decision rule, of the assumptions under which each guarantee holds. This paper formulates P1 as a probabilistic statement (a per-cycle upper bound on switching probability and rate) and P4 on the basis of ρ dynamics, a lower bound on the lateral-progress rate, and the **containment of the reachable upper bound of the single-challenger accumulator**.

One point of scope is worth stating before the propositions rather than after them. The anti-oscillation guarantee this paper **carries in its headline claims is P2** (§4.7): a deterministic lower bound of $N_{\min}(\rho) = \lceil E_{\text{th}}(\rho)/((D_{\max} - \Delta_{\text{floor}}) dt) \rceil$ control cycles on the interval between two consecutive discretionary switches, which holds on every sample path and assumes nothing about the distribution of D_k beyond the range bound $D_k \leq D_{\max}$. Two qualifications are stated with it rather than left implicit. First, the bound is informative only under the non-vacuity condition $E_0 > (D_{\max} - \Delta_{\text{floor}}) dt$ ($N_{\min}(0) \geq 2$), which we declare as a design condition alongside (10) (Remark 10); without it P2 collapses to the one-cycle bound that every discrete-time policy satisfies. Second, P2 is an upper bound on the switching rate only — a policy that never switches satisfies it — so temporal consistency in the sense this paper intends is P2 *together with* the conditional response-time bound of Proposition 3. That deadline applies only while the same challenger remains selected and eligible, receives uninterrupted updates without reset or HOLD, maintains the stated advantage lower bound, and has sufficient clip and leak-equilibrium headroom. P1’s exponential form (part (ii)) is a sharper statement — it upgrades “switching is infrequent” to “switching is exponentially rare” — but it is *conditional on an independence hypothesis* on $\{D_k\}$ that stationarity alone does not supply, as Remark 3 shows by counterexample. We therefore state P1(ii) as a conditional refinement and rest the paper’s temporal-consistency claim on P2.

The single-challenger accumulator and notation (a premise for P4/§4.9 consistency).

The switching dynamics of this paper close over the **single** leaky-evidence accumulator of §4.3/§4.5. Since this accumulator, by definition, always integrates the advantage evidence of the challenger c' seeking to overturn the current commitment c^* , we denote it in the property analysis below as the **challenger accumulator** e^{rev} — it is **exactly the same single variable** as the accumulation equation of §4.3 and the state variable e of the §4.5 algorithm; the superscript rev merely denotes the role “evidence for a challenge that would reverse the current commitment” and is not a separate accumulator. We write the maximum value e^{rev} can reach as $e_{\max}^{\text{rev}}$ (the smaller of the leak equilibrium bound and the clip bound $e_{\max}$ when $\lambda < 1$; derived in P4).

The soundness of the switching dynamics is summarized by a single **two-sided condition** on the reachable upper bound of this single accumulator.

$$E_0 < e_{\max}^{\text{rev}} < E_0(1 + k_\rho) \quad (10)$$

The lower bound ($e_{\max}^{\text{rev}} > E_0$) is an algebraic **reachability headroom** condition under the declared input bound at $\rho = 0$ (§4.9); actual finite response also requires the persistent-selection and advantage hypotheses below. The upper bound ($e_{\max}^{\text{rev}} < E_0(1 + k_\rho)$) is the **P4 containment** condition that once the maneuver is sufficiently progressed ($\rho > \bar{\rho}$; the boundary point itself belongs to the switching window, see Remark 12), challenge accumulation is trapped below the threshold and reversal is blocked. Since both requirements are a lower and upper bound on the same variable $e_{\max}^{\text{rev}}$, they can be satisfied simultaneously without contradiction. A third declared condition, $E_0 > (D_{\max} - \Delta_{\text{floor}}) dt$ (P2 non-vacuity, Remark 10), is independent of (10): it bounds the threshold from below by the largest single-

cycle innovation rather than from above by the reachable bound. An additional “above-threshold headroom” requirement ($e_{\max} > E_0(1 + k_\rho)$) on the same upper bound would collide head-on with this containment upper bound; as discussed in §4.9, it is not a soundness condition and is not imposed.

Proposition 1 (Anti-oscillation — probabilistic form). *Suppose the challenger advantage D_k is a stationary stochastic process with mean 0, bounded variance $\text{Var}[D_k] \leq \sigma_D^2$, and **bounded range** $|D_k| \leq D_{\max}$ almost surely, and let $0 < \Delta_{\text{floor}} < D_{\max}$. Write $X_k := (D_k - \Delta_{\text{floor}}) dt$ for the **driving innovation** of the accumulation recursion of §4.3. Then (i) the innovation has strictly negative mean,*

$$\mathbb{E}[X_k] = (\mathbb{E}[D_k] - \Delta_{\text{floor}}) dt = -\Delta_{\text{floor}} dt < 0, \quad (11)$$

*so in ambiguous configurations (mean advantage 0) a discretionary switch requires the fluctuations of D_k to overcome a persistent negative bias in the input. We emphasize that (11) is a statement about the raw input to the recursion, **not** about the one-cycle increment of the reflected state e_k^{rev} : the lower clip at 0 truncates negative innovations, so the expected state increment $\mathbb{E}[e_{k+1}^{\text{rev}} - e_k^{\text{rev}}]$ can be strictly positive at the boundary even though $\mathbb{E}[X_k] < 0$ (Remark 1). Rarity is therefore quantified below as a crossing-probability bound, not as a drift argument on the state.*

*Suppose further that $\{D_k\}$ is **i.i.d.** (the **independence hypothesis** of this proposition). Start with zero evidence and consider consecutive evidence-update cycles (or an externally fixed observation schedule on which the stated i.i.d. law holds). No claim is made for a data-dependent subsequence of retained advantages. Let q_{k-1} be the evidence stored after cycle $k-1$, let $r_k \in [0, q_{k-1}]$ be the value after any challenger reset, and define the pre-test evidence $x_k = \text{clip}(\lambda r_k + X_k, 0, e_{\max})$; a successful switch may reset the subsequently stored q_k to zero in that same cycle. If $\mathbb{P}(X_1 > 0) = 0$, the accumulator never leaves 0 and the discretionary switching probability is exactly 0. Otherwise, boundedness of X_1 together with $\mathbb{E}[X_1] < 0$ implies that the **Lundberg equation** $\mathbb{E}[e^{\theta X_1}] = 1$ has a unique positive root $\theta^* > 0$ (the adjustment coefficient), and (ii) the pre-test crossing probability, and hence the per-cycle switching probability, admits the uniform bound*

$$\mathbb{P}(x_k \geq E_0) \leq e^{-\theta^* E_0} \quad \text{for every cycle } k, \quad (12)$$

whence the expected number of discretionary switches in any window of N cycles is at most $Ne^{-\theta^ E_0}$, and the expected switching rate per unit time is at most $(1/dt)e^{-\theta^* E_0}$ — both exponentially small in E_0 , with an exponent θ^* that is increasing in the margin Δ_{floor} . The bound (12) is a marginal, per-cycle bound: over an unbounded horizon of persistent ambiguity an eventual crossing is not excluded (nor should it be — the reachability-headroom condition of §4.9 requires the threshold to be reachable); what is guaranteed is that crossings are exponentially rare per cycle.*

Part (ii) is conditional on the independence hypothesis and is not established under stationarity alone; see Remark 3 for a counterexample. Accordingly the guarantee this paper carries in its headline claims is the deterministic switching-rate bound P2 (§4.7), which requires no distributional hypothesis on D_k beyond the range bound; P1(ii) is a refinement that sharpens rarity from “bounded frequency” to “exponentially rare” when the independence hypothesis holds. Extension to dependent inputs is discussed — and deliberately not claimed as a theorem — in Remark 6.

Remark 1 (Sign of the state increment at the reflecting boundary). *The distinction drawn in part (i) is not pedantic; it is tempting to call (11) “the one-cycle expected increment of the challenger accumulator,” but that reading is false under the proposition’s own hypotheses. Take D_k i.i.d. uniform on $\{-a, +a\}$ with $\Delta_{\text{floor}} < a \leq D_{\max}$, and start at the boundary $e_0^{\text{rev}} = 0$. Then $e_1^{\text{rev}} = \text{clip}(X_1, 0, e_{\max})$, so (for $(a - \Delta_{\text{floor}})dt \leq e_{\max}$)*

$$\mathbb{E}[e_1^{\text{rev}} - e_0^{\text{rev}}] = \frac{1}{2}(a - \Delta_{\text{floor}}) dt > 0, \quad (13)$$

even though $\mathbb{E}[X_1] = -\Delta_{\text{floor}} dt < 0$: reflection truncates the negative half of the innovation and keeps the positive half. A negative-mean input therefore does not make the reflected state a supermartingale, and no drift argument on the state can carry part (ii). This is the standard situation of queueing theory — a stable queue has negative-mean net input yet strictly positive expected growth from empty — and it is why the proof below routes through a pathwise domination by an unreflected random walk and a maximal inequality, rather than through the state’s expected increment.

Remark 2 (On the boundedness hypothesis). The range hypothesis $|D_k| \leq D_{\max}$ is not an additional restriction on the system: by the $[0, 1]$ normalization of §4.2 the cost $J = \sum_X w_X \hat{J}_X$ is bounded, so the advantage $D_k = J_k(c_{k-1}^*) - J_k(c_k')$ of §4.3 is bounded by construction, and $D_k \leq D_{\max}$ is the same hypothesis already carried by P2 (§4.7), P4 (§4.8), and the reachable bound $e_{\max}^{\text{rev}}$ (§4.8). It is nevertheless stated explicitly here, because part (ii) is an exponential bound and an exponential bound requires a finite exponential moment, which stationarity, zero mean, and finite variance do not supply on their own. A centred Student- t_3 advantage, for instance, satisfies every one of those three conditions yet has a polynomially decaying tail and no finite moment generating function, so no adjustment coefficient exists for it and a bound of the form (12) cannot hold. Under $|D_k| \leq D_{\max}$ this failure mode is excluded, and the normalization of §4.2 guarantees the hypothesis holds for the object this paper actually constructs.

Remark 3 (Why stationarity alone is not enough). Stationarity, zero mean, bounded variance and bounded range together are still not enough for part (ii), and it is worth being explicit about why, because the gap is not a technicality of the proof method but a genuine failure of the conclusion.

Draw $Z \in \{-a, +a\}$ once with equal probabilities, with $\Delta_{\text{floor}} < a \leq D_{\max}$, and set $D_k = Z$ for every k . This is a stationary, mean-zero, bounded process. Choose $\lambda = 1$, constant $\rho = 0$, $E_0 = n(a - \Delta_{\text{floor}})dt$, and $e_{\max} \geq E_0$, with uninterrupted updates from zero. On the positive branch the first threshold crossing is exactly at cycle n ; on the negative branch it never occurs. Hence $\mathbb{P}(x_n \geq E_0) = 1/2$, even with reset-on-switch semantics, since this is the first crossing. The positive Lundberg root of the one-step marginal law is independent of n , so $e^{-\theta^* E_0}$ can be arbitrarily smaller than $1/2$ as n grows. This disproves the stationarity-only extension. For $\lambda < 1$ the constant-positive branch instead uses the geometric hitting formula in Proposition 3, when its equilibrium and clip permit crossing; the linear ceiling is not applicable. No claim that the reset-on-switch process has a fixed-cycle marginal converging to $1/2$ is needed.

The mechanism is that a single draw persisting forever is perfectly admissible under stationarity, and no amount of bounded support repairs it: the process never forgets its regime, so no argument that needs fresh randomness — independent increments, or independent blocks — has anything to work with. This is precisely the failure mode the i.i.d. hypothesis of part (ii) excludes, and any relaxation of that hypothesis would have to exclude it too (Remark 6). Note also that this counterexample says nothing about P2 (§4.7), whose inter-switch interval bound is deterministic and holds on every sample path, including the adversarial one just constructed — which is why P2, not P1(ii), carries the headline guarantee.

Proof. Throughout, $\{D_k\}$ is i.i.d. with the moment and range hypotheses of the statement, and $X_k = (D_k - \Delta_{\text{floor}})dt$. Part (i) is the one-line computation (11); Remark 1 explains why it must be read as a statement about the input, not about the state. Note first that the lower clip is a **reflecting (saturating)** boundary, not an absorbing one: e^{rev} is held at 0 only while the update would go non-positive, and leaves 0 on the first sufficiently positive innovation, so negative input drift does not trap the process at 0 — which is exactly why the earlier “expected hitting time” framings were uninformative, and why part (ii) is stated as a per-cycle probability bound whose *scaling* in E_0 is the design-relevant quantity. We prove part (ii) in three steps; the trivial case $\mathbb{P}(X_1 > 0) = 0$ was dispatched in the statement.

Step 1 (pathwise domination). Let q_{k-1} be the evidence stored after all tests and resets of cycle $k-1$, and let $r_k \in [0, q_{k-1}]$ be the value after any challenger reset but before cycle k 's update. Denote the evidence presented to the threshold test by

$$x_k = \text{clip}(\lambda r_k + X_k, 0, e_{\max}).$$

If a switch fires, the stored value is then reset to $q_k = 0$; otherwise $q_k = x_k$ (or a later operation can only reduce it). Define the **Lindley recursion** [29] driven by the same innovations, $W_0 = 0$, $W_k = \max(W_{k-1} + X_k, 0)$: the leak-free ($\lambda = 1$), unclipped-above, never-reset companion of the recursion of §4.3. We claim $q_k \leq W_k$ and $x_k \leq W_k$ for every k . Induction starts from $q_0 = W_0 = 0$. If $q_{k-1} \leq W_{k-1}$, then $r_k \leq q_{k-1}$ and

$$x_k \leq \max(q_{k-1} + X_k, 0) \leq W_k.$$

The post-test stored value satisfies $q_k \leq x_k \leq W_k$. Thus the pre-test quantity that can trigger a switch, as well as the stored post-reset state, is dominated pathwise by the Lindley walk.

Step 2 (adjustment coefficient and maximal inequality). Unfolding the Lindley recursion gives the suffix-sum representation $W_k = \max_{0 \leq j \leq k} (X_k + X_{k-1} + \dots + X_{k-j+1})$ (empty sum = 0), and since the X_i are i.i.d., reversing the order of the increments shows that W_k has, for each fixed k , the same distribution as $\max_{0 \leq j \leq k} S_j$ with $S_j = X_1 + \dots + X_j$. Let $\psi(\theta) = \log \mathbb{E}[e^{\theta X_1}]$: it is finite for all θ (bounded range), convex, with $\psi(0) = 0$ and $\psi'(0) = \mathbb{E}[X_1] = -\Delta_{\text{floor}} dt < 0$; and since $\mathbb{P}(X_1 > 0) > 0$, $\psi(\theta) \rightarrow \infty$ as $\theta \rightarrow \infty$. Hence ψ has a unique positive root θ^* , i.e., $\mathbb{E}[e^{\theta^* X_1}] = 1$. Then $M_j = e^{\theta^* S_j}$ is a nonnegative martingale with $M_0 = 1$, and the maximal inequality for nonnegative supermartingales (Ville's inequality) gives

$$\mathbb{P}\left(\sup_{j \geq 0} S_j \geq E_0\right) = \mathbb{P}\left(\sup_{j \geq 0} M_j \geq e^{\theta^* E_0}\right) \leq e^{-\theta^* E_0}.$$

This is Kingman's bound on the waiting time of a single-server queue [30], specialized to our increments; it enters as a theorem, not an analogy. Since W_k is Page's one-sided CUSUM statistic of the innovations [39], this step is the standard exponential tail bound for that statistic; P1 applies it rather than deriving a new result. (Under zero mean and finite variance alone no root θ^* need exist; see the remark on the boundedness hypothesis above. The i.i.d. hypothesis is consumed twice in this step — once for the reversal identity, once for the martingale property — and neither survives bare stationarity, per Remark 3.)

Step 3 (from crossing to switching). A discretionary switch at cycle k requires the pre-test value $x_k \geq E_{\text{th}}(\rho_k) \geq E_0$ (progress hardening only raises the threshold); the stored post-reset value may already be zero in that same cycle. By Steps 1–2, for every k ,

$$\mathbb{P}(\text{switch at cycle } k) \leq \mathbb{P}(x_k \geq E_0) \leq \mathbb{P}(W_k \geq E_0) = \mathbb{P}\left(\max_{0 \leq j \leq k} S_j \geq E_0\right) \leq e^{-\theta^* E_0},$$

which is (12). Linearity of expectation then bounds the expected number of discretionary switches in any N -cycle window by $N e^{-\theta^* E_0}$, i.e., the expected switching rate per unit time by $(1/dt) e^{-\theta^* E_0}$. Monotonicity of θ^* in the margin follows from ψ decreasing pointwise (for $\theta > 0$) as Δ_{floor} grows. Finally, since the leak and the resets were absorbed in Step 1, the bound holds verbatim for every $\lambda \leq 1$; a smaller λ only widens the gap between the implemented process and the dominating walk, so in practice the true switching probability is further below the bound.

Thus the extreme-cycle oscillation that memoryless argmin exhibits near a symmetric point is **probabilistically** suppressed: in ambiguous configurations a discretionary switch occurs in any given cycle only with exponentially small probability, when the fluctuations of D_k have accumulated enough to push the evidence over the threshold. $\square$

Remark 4 (Tuning guidance: a closed-form approximation of θ^*). The exact adjustment coefficient θ^* of Proposition 1 depends on the full law of D_1 through the Lundberg equation $\mathbb{E}[e^{\theta(D_1 - \Delta_{\text{floor}})dt}] = 1$; boundedness and variance alone do not determine it. For parameter tuning it is nevertheless useful to have a closed form. Expanding the log-moment-generating function to second order, $\psi(\theta) \approx -\theta \Delta_{\text{floor}} dt + \frac{1}{2} \theta^2 \sigma_D^2 dt^2$, and solving $\psi(\theta) = 0$ gives the **small-drift, quasi-Gaussian approximation**

$$\theta^* \approx \frac{2\Delta_{\text{floor}}}{\sigma_D^2 dt}, \quad \text{whence} \quad r_{\text{switch}} \lesssim \frac{1}{dt} \exp\left(-\frac{2\Delta_{\text{floor}} E_0}{\sigma_D^2 dt}\right). \quad (14)$$

We use (14) only as design guidance — it indicates how rarity scales as the margin Δ_{floor} or the threshold E_0 grows, the variance σ_D^2 shrinks, or the cycle time dt shortens — and it is **not** the coefficient the guarantee is stated with: the guarantee (12) carries the exact root θ^* . The variance scale in (14) is matched to the **per-cycle increment variance** $\sigma_D^2 dt^2$ (equivalently, the per-unit-time variance $\sigma_D^2 dt$), which restores the $1/dt$ factor in θ^* and in the switching-rate bound that an unnormalized reading would drop.

Remark 5 (Deterministic special case). If $|D_k| \leq \Delta_{\text{floor}}$ for all k , the increment is always ≤ 0 , so $e_k^{\text{rev}} \equiv 0$ and the switching probability is exactly 0 — this is the trivial case $\mathbb{P}(X_1 > 0) = 0$ of Proposition 1(ii), and the statement of the initial deterministic formulation. This probabilistic form relaxes that strong assumption — from “every realization is inside the margin” to “mean 0, bounded variance, and range bounded by D_{max} ” — and as $\sigma_D^2 \rightarrow 0$ in the tuning approximation (14) the bound tends to 0, continuously recovering the deterministic case. Note that only the pointwise margin condition $|D_k| \leq \Delta_{\text{floor}}$ is relaxed; the range bound $|D_k| \leq D_{\text{max}}$, being a structural consequence of the cost normalization rather than an assumption about the environment, is retained.

Remark 6 (IID hypothesis and autocorrelation). Proposition 1(ii) is stated and proved for i.i.d. D_k . The D_k of this paper, however, is a stationary process that allows autocorrelation due to the temporal correlation of human motion and prediction, and we are explicit about what is and is not claimed across that gap. A natural route to a dependent version exists — under geometric α -mixing one would decompose the trajectory into regenerative blocks, whose finite exponential moments the range hypothesis $|D_k| \leq D_{\text{max}}$ supplies, and re-run the Step-2 argument on block sums — but turning that route into a theorem requires quantified hypotheses (an explicit regeneration structure, a mixing rate, and a dependence-adjusted adjustment coefficient) that this paper does not formalize, so **no exponential bound is claimed here for dependent inputs**. A tempting fallback reads θ^* , or the effective variance replacing σ_D^2 , as “absorbing the autocorrelation structure” — with the long-run variance $\sum_k \text{Cov}(D_0, D_k)$ substituted for the marginal variance — while claiming only the qualitative form “exponential decay in $\Delta_{\text{floor}} \cdot E_0$.” That fallback is not valid: a long-run variance does not determine a large-deviation rate, no theorem connects it to the first-passage behaviour of this reflected recursion, and Remark 3 exhibits a stationary process for which the qualitative form itself is false. Where independence cannot be asserted, the guarantee available is P2 (§4.7), which is deterministic, pathwise, and indifferent to the dependence structure. Whether approximate independence is defensible for a given deployment is an empirical question, and estimating the autocorrelation structure of D_k from logged encounters is a measurement target of §5.5 and the planned evaluation (§5.6). Finally, the leak requires no separate treatment: Step 1 of the proof absorbs every $\lambda \leq 1$, so introducing $\lambda < 1$ leaves the bound (12) valid verbatim — it only widens the gap between the implemented process and the dominating walk.

Remark 7 ($\lambda \cdot E_{\text{th}}$ interaction). The interaction of λ and E_{th} (the leak makes reaching the threshold depend not on the simple integral of D but on its temporal **shape** — a short, strong advantage pulse accumulates before leaking away and easily crosses the threshold, whereas a long, weak advantage is offset by leaking and falls short of the threshold) is further analyzed in §4.9.

Proposition 2 (Discretionary inter-switch separation). *Let $h_k > 0$ be the interval at cycle k , let $0 < \lambda_k \leq 1$, and suppose $D_k \leq D_{\max}$ with $b = D_{\max} - \Delta_{\text{floor}} > 0$. Every discretionary switch resets the stored evidence to zero; all other resets only decrease it, and no external operation adds evidence. Let $s < t$ be consecutive discretionary-switch cycles and let $E_t = E_{\text{th}}(\rho_t) \geq E_0 > 0$ denote the threshold used immediately before the switch at t . Then*

$$\sum_{k=s+1}^t h_k \geq \frac{E_t}{b}. \quad (15)$$

For fixed $h_k = dt$, this implies

$$t - s \geq N_{\min}(\rho_t) := \left\lceil \frac{E_{\text{th}}(\rho_t)}{(D_{\max} - \Delta_{\text{floor}})dt} \right\rceil \geq N_0 := \left\lceil \frac{E_0}{(D_{\max} - \Delta_{\text{floor}})dt} \right\rceil. \quad (16)$$

The declared non-vacuity condition is

$$E_0 > (D_{\max} - \Delta_{\text{floor}})dt, \quad N_0 \geq 2. \quad (17)$$

For variable intervals with a verified upper bound $h_k \leq h_{\max}$, replace dt by $h_{\max}$ in the cycle-count bound and non-vacuity condition. Without such a bound, only the accumulated-time inequality is claimed. These guarantees concern discretionary switches, not safety-triggered changes, class-lifecycle changes, physical oscillation, or human-perceived legibility.

Proof. Write q_{k-1} for the stored post-reset evidence and $r_k \in [0, q_{k-1}]$ for the evidence after any pre-update reset. The pre-test evidence is

$$x_k = \min(e_{\max}, \max(0, \lambda_k r_k + (D_k - \Delta_{\text{floor}})h_k)).$$

Since $q_{k-1} \geq 0$, $b > 0$ and $\lambda_k \leq 1$,

$$x_k \leq \max(0, q_{k-1} + bh_k) = q_{k-1} + bh_k.$$

The upper clip and subsequent resets only decrease this bound, and a cycle with no evidence update cannot increase the stored state. Starting from $q_s = 0$, induction gives $x_t \leq b \sum_{k=s+1}^t h_k$. The switch requires $x_t \geq E_t$, proving the accumulated-time inequality. Fixed or upper-bounded intervals give the ceiling bounds. This proof explicitly accounts for the lower reflecting clip, which can increase a negative update argument to zero. $\square$

Remark 8 (Finite observation windows and implementation timing). *In any N consecutive fixed-period cycles, there are at most $1 + \lfloor (N - 1)/N_0 \rfloor$ discretionary switches. In the terminology of switching-system theory [42], P2 gives the discretionary switches (not the safety-triggered ones) a fixed dwell time of $N_0 dt$ for fixed dt , and this window count is the corresponding average-dwell-time bound with chatter bound one; the argument is elementary and is not claimed as new. The asymptotic rate is at most $1/(N_0 dt)$; a finite-window rate needs the boundary term. The Nav2 adapter uses measured inter-call intervals, so configuring 20 Hz alone does not establish the fixed-dt cycle bound. For example, the admissible input $D = 2.8$ over a single $h = 0.12$ s update yields $x = 0.33 \geq E_0 = 0.30$ from zero. This is consistent with (15). Progress in (16) is the value before switching, not the value after the commit reset.*

Remark 9 (Variable sampling intervals: leak time and claimed range). *The implemented leak coefficient λ is applied once per update, not per unit time. With a fixed per-cycle λ , the fraction of evidence retained over an interval of physical time depends on how many updates fall in it, so the physical leak*

time $\tau_{\text{leak}} = -h/\ln \lambda$ changes with the actual interval h : at $\lambda = 0.97$ it is 1.64 s for $h = 0.05$ s, 3.28 s for the adapter's 0.1 s fallback, and 0.82 s for $h = 0.025$ s. The per-update innovation $(D_k - \Delta_{\text{floor}})h_k$ also scales with h_k , so the leak equilibrium $(D - \Delta_{\text{floor}})h/(1 - \lambda)$, the reachable bound $e_{\text{max}}^{\text{rev}}$, the containment threshold $\bar{\rho}$ and the response-time bound change with the interval as well. A per-second leak would use $\lambda_k = \exp(-h_k/\tau_{\text{leak}})$, equivalently $\lambda_k = \lambda^{h_k/dt_{\text{ref}}}$ for a reference period dt_{ref} ; it is not implemented, and introducing it is a separate algorithm change that would need its own evaluation. Claimed range: the accumulated-time inequality (15) holds for every $h_k > 0$ and every $\lambda_k \in (0, 1]$, so it covers both the fixed and the per-second forms. All cycle counts and time constants in this paper ($N_{\text{min}} = 3, 7, 14$; the response times 76, 24, 17, 7 cycles; $\tau_{\text{leak}} \approx 1.64$ s; the leak-equilibrium values of §4.9 and §5.3; P1's per-cycle bound and P4's $e_{\text{max}}^{\text{rev}}$) and all offline results are claimed only for the fixed $dt = 0.05$ s. The Nav2 adapter accepts any positive measured interval, with a 0.1 s fallback, and enforces no upper bound h_{max} ; no interval range has been validated for it, so for the adapter only (15) is claimed.

Remark 10 (Non-vacuity of P2 and the default knobs). Condition (17) is not implied by the two-sided condition (10), and the boundary instance of Remark 12 shows the difference: with $dt = 0.05$, $\Delta_{\text{floor}} = 0.05$, $D_{\text{max}} = 0.95$ and $E_0 = 0.03$, (10) holds but $(D_{\text{max}} - \Delta_{\text{floor}})dt = 0.045 > E_0$, so $N_{\text{min}}(0) = 1$ and P2 is vacuous there: an advantage sequence that takes the value D_{max} against whichever **class** is currently committed drives e^{rev} from 0 to $0.045 \geq E_0$ in one cycle after every reset and flips the class every cycle while satisfying the bound exactly. That instance is retained only to exhibit the boundary of the lock region; it is not an admissible operating point once (17) is imposed. For the default knobs of Table 4 the condition holds with margin. By the $[0, 1]$ normalization of §4.2, $D_k = J_k(c_{k-1}^*) - J_k(c_k')$ satisfies $|D_k| \leq \sum_X w_X = 2.8$ for the default weights, so in the worst case $(D_{\text{max}} - \Delta_{\text{floor}})dt = 0.1375 < E_0 = 0.30$ and $N_{\text{min}}(0) = 3$ cycles (0.15 s); if the realized advantage is bounded by a single normalized term, $D_{\text{max}} \leq 1$, then $N_{\text{min}}(0) = 7$ cycles (0.35 s), and for $D_{\text{max}} \leq 0.5$, $N_{\text{min}}(0) = 14$ cycles (0.70 s). Progress hardening multiplies the threshold inside the ceiling by $(1 + k_\rho \rho^p)$, not the rounded cycle count. The worst-case figure is reported deliberately: P2 is a weak guarantee when the advantage can saturate every cost term at once, and the practical content of temporal consistency at the default knobs rests on the response-time bound below and, for i.i.d. inputs, on P1(ii).

Proposition 3 (Conditional response time to a persistent selected challenger). Fix a cycle k_0 with stored evidence $q_{k_0} \geq 0$. Until the first discretionary switch, or through the next N_{resp} cycles, suppose (i) the same selected challenger remains eligible; (ii) no safety intervention, HOLD, retarget, lifecycle reset, or external reset interrupts accumulation; (iii) an update and threshold test run each cycle; (iv) $D_k \geq D_{\text{sus}} > \Delta_{\text{floor}}$; and (v) $0 < E_{\text{th}}(\rho_k) \leq \bar{E} \leq e_{\text{max}}$. Let dt and $\lambda \in (0, 1]$ be fixed and $a = (D_{\text{sus}} - \Delta_{\text{floor}})dt$. If $\lambda = 1$, or $\lambda < 1$ and $a/(1 - \lambda) > \bar{E}$, the first switch occurs within

$$N_{\text{resp}} = \begin{cases} \left\lceil \frac{\ln(1 - \bar{E}(1 - \lambda)/a)}{\ln \lambda} \right\rceil, & 0 < \lambda < 1, \\ \lceil \bar{E}/a \rceil, & \lambda = 1. \end{cases} \quad (18)$$

Conversely, let $L > 0$, $q_{k_0} < L$, $0 < \lambda < 1$, $D_k \leq \bar{D}$, and $E_{\text{th}}(\rho_k) \geq L$ throughout a window. If $(\bar{D} - \Delta_{\text{floor}})dt \leq (1 - \lambda)L$ and no external operation increases evidence, no discretionary switch occurs in that window. Independently, $E_{\text{th}}(\rho_k) > e_{\text{max}}$ blocks switching in that cycle regardless of the advantage.

Proof. Let $z_0 = 0$, $z_n = \lambda z_{n-1} + a$. Thus $z_n = a(1 - \lambda^n)/(1 - \lambda)$ for $\lambda < 1$, and $z_n = na$ for $\lambda = 1$. The stated condition ensures a finite first $n^* = N_{\text{resp}}$ with $z_{n^*} \geq \bar{E}$. For $n < n^*$, $z_n < \bar{E} \leq e_{\text{max}}$, and monotonicity gives implemented pre-test evidence at least z_n , inductively until the first switch. At n^* it is at least $\min(e_{\text{max}}, z_{n^*}) \geq \bar{E} \geq E_{\text{th}}(\rho_{k_0+n^*})$, so the threshold test switches by that cycle. For the converse, if stored evidence $q < L$, then

$$\lambda q + (\bar{D} - \Delta_{\text{floor}})dt < \lambda L + (1 - \lambda)L = L.$$

Lower clipping preserves strict inequality because $0 < L$; upper clipping and resets only decrease the result. Induction keeps pre-test evidence below L , so no switch fires. This argument remains valid for a negative input upper bound. Finally, the clip obstruction follows from $x_k \leq e_{\max}$. $\square$

Remark 11 (Response time, clip lockout, and scope). For $dt = 0.05$, $\Delta_{\text{floor}} = 0.05$, $E_0 = 0.30$, $\lambda = 0.97$, and constant $\rho = 0$, a constant advantage from zero crosses the baseline threshold only when $D > 0.23$. Equation (18) gives 76, 24, 17, and 7 cycles (3.80, 1.20, 0.85, and 0.35 s) for $D = 0.25, 0.40, 0.50, 1.0$, respectively. These are derived fixed-threshold results, not measured response delays. Their equality with the P2 lower bound in the last case is a numerical coincidence, not a general requirement. The default $e_{\max} = 0.50$ is below $E_{\text{th}}(1) = 0.60$. For $k_p = 1, p = 2$, every cycle with $\rho > \sqrt{2/3} \approx 0.8165$ is therefore locked against discretionary switching regardless of advantage. The value 0.41 is only the leak-equilibrium threshold for $\bar{E} = 0.60$ in a hypothetical configuration with enough clip headroom; it does not restore response at $\rho = 1$ under the defaults. Clip equality $e_{\max} = \bar{E}$ is permitted by the response theorem, whereas an equilibrium equal to a threshold is approached from below and not reached in finite cycles from a below-threshold start in the exact-real model. This proposition is conditional on persistent selection and continued updates. It is not an unconditional recall or deadline guarantee for all warranted alternatives; hypothesis coverage and missed opportunities must be measured separately.

Proposition 4 (Safety dominance). In an active decision cycle outside an already absorbing *HOLD*, if $c^* \notin \mathcal{S}$, the safety ladder fires regardless of accumulator state or progress. In *HOLD*, the zero-command contract takes precedence.

Argument. Because stage 2 (safety) of the algorithm is evaluated before stage 3 (discretionary) with lexicographic priority, commitment inertia can never delay the safety response in any case when a safety violation occurs. The safety-branch hysteresis of §4.4 changes the form of response while its dwell/window conditions are active; it is not a proof of globally monotone mode descent or physical collision freedom. $\square$

Proposition 5 (Maneuver completion — ρ dynamics and containment of the challenger accumulator). Suppose there is no safety intervention, the challenger advantage is bounded ($D_k \leq D_{\max}$), the trajectory layer realizes the commanded cross-track progress rate at at least $v_{\text{lat},\min} > 0$ as in Assumption 3(d), and the cumulative disturbance retreat is bounded, $\sum_k b_k \leq B < L_{\text{plan}}$ (the quantity used in the proof below). Then containment is pointwise: in every cycle whose progress ρ **strictly exceeds** the containment threshold $\bar{\rho}$ (derived below), reversal to the opposite **class** is blocked. If, moreover, ρ never returns to or below $\bar{\rho}$ after first exceeding it (forward invariance; Remark 14), the maneuver completes without reversal within at most $\lceil (L_{\text{plan}} + B) / (v_{\text{lat},\min} dt) \rceil$ cycles of an uninterrupted commitment starting with zero progress. In the pre-lock region ($\rho \leq \bar{\rho}$), a sustained challenger advantage can still cross $E_{\text{th}}(\rho)$ and trigger a discretionary switch — this is not a defect but a legitimate switching window intentionally left open by the reachability-headroom lower bound $e_{\max}^{\text{rev}} > E_0$ (e.g., the one legitimate switch per encounter measured in **clean_commit** in §5.3), in which case the algorithm restarts with $e^{\text{rev}} \leftarrow 0 \cdot \rho \leftarrow 0$, and this guarantee applies identically to the new commitment. That is, what P4 excludes is reversal in the locked region ($\rho > \bar{\rho}$; the completion clause additionally requires the forward invariance stated above).

Proof. First we define the dynamics of ρ . Let progress be $\rho_k = \text{clip}(L_{\text{real},k}/L_{\text{plan}}, 0, 1)$, where $L_{\text{real},k}$ is the cumulative realized cross-track progress and $L_{\text{plan}} = \lfloor \text{planned lateral offset of } c^* \rfloor$. The one-cycle realized progress is $\Delta L_k = v_{\text{lat},k} \cdot dt$, and by assumption $v_{\text{lat},k} \geq v_{\text{lat},\min}$ (per Assumption 3(d), $v_{\text{lat},k}$ is not the vehicle’s lateral body-frame velocity but the progress rate along the cross-track coordinate, realized in non-holonomic drives as the product of forward speed and steering). However, since ρ can stagnate or decrease if the robot is pushed by environmental change or the corridor narrows, we **do**

not assume monotone increase and instead use a lower bound on the non-negative net increment. Letting $b_k \geq 0$ denote retreat due to disturbance (b_k covers the **non-negative decrement of net progress** due to disturbance — it collects all unplanned retreats that erode cross-track progress, such as being pushed, corridor narrowing, or momentary reversal, into a single non-negative term), $L_{\text{real},k} = L_{\text{real},k-1} + v_{\text{lat},k}dt - b_k$. Under the condition that the disturbance is bounded ($\sum_k b_k \leq B < L_{\text{plan}}$, i.e., cumulative retreat does not consume the entire planned displacement), the lower bound on net progress is

$$L_{\text{real},K} \geq K \cdot v_{\text{lat},\min} \cdot dt - B, \quad (19)$$

so after $K \geq (L_{\text{plan}} + B)/(v_{\text{lat},\min} \cdot dt)$ cycles, $L_{\text{real},K} \geq L_{\text{plan}}$, i.e., $\rho \rightarrow 1$ is reached.

Meanwhile, for locking (blocking reversal to the opposite **class**) to hold, the progress-hardening threshold $E_{\text{th}}(\rho) = E_0(1 + k_\rho \rho^p)$ must exceed the **maximum value reachable by the challenger accumulator** $e_{\text{max}}^{\text{rev}}$. The challenger accumulator increases by at most $(D_{\text{max}} - \Delta_{\text{floor}})dt$ per cycle, decreases via the leak λ , and is clipped at e_{max} . Hence, under $\lambda < 1$ (leak present), the reachable maximum of the challenger accumulator is the smaller of the leak-integral equilibrium bound and the clip bound, namely

$$e_{\text{max}}^{\text{rev}} = \min\left(e_{\text{max}}, \frac{(D_{\text{max}} - \Delta_{\text{floor}})dt}{1 - \lambda}\right) \quad (20)$$

(the geometric series $\sum_{j \geq 0} \lambda^j (D_{\text{max}} - \Delta_{\text{floor}})dt = (D_{\text{max}} - \Delta_{\text{floor}})dt/(1 - \lambda)$ is the leak equilibrium bound, and the clip further caps it at e_{max}). Only under the pure-integrator assumption $\lambda = 1$ does the leak-equilibrium term diverge to infinity, so that the reachable bound simplifies to the clip bound e_{max} . Below, for generality, we write $e_{\text{max}}^{\text{rev}}$ as the reachable bound. The **containment condition** is thus

$$E_{\text{th}}(\rho) = E_0(1 + k_\rho \rho^p) > e_{\text{max}}^{\text{rev}} \quad (\text{P4 containment condition at progress } \rho) \quad (21)$$

and the boundary value at which the corresponding *equality* $E_{\text{th}}(\bar{\rho}) = e_{\text{max}}^{\text{rev}}$ holds is

$$\bar{\rho} = \left(\frac{e_{\text{max}}^{\text{rev}}/E_0 - 1}{k_\rho} \right)^{1/p} \quad (22)$$

Since E_{th} is strictly increasing in ρ (for $k_\rho > 0$, $p \geq 1$), the containment condition holds **exactly on the open region** $\rho > \bar{\rho}$; the boundary point $\rho = \bar{\rho}$ belongs to the switching window whenever $e_{\text{max}}^{\text{rev}}$ is attained (Remark 12). The **existence condition** for a nonempty lock region $(\bar{\rho}, 1]$ is $\bar{\rho} < 1$ with $\bar{\rho} > 0$, i.e., $E_0 < e_{\text{max}}^{\text{rev}} < E_0(1 + k_\rho)$.

Non-vacuity of containment. Note that the lower bound $e_{\text{max}}^{\text{rev}} > E_0$ in the above existence condition is a **sufficient headroom design condition, not an unconditional liveness theorem**. If the reachable bound $e_{\text{max}}^{\text{rev}}$ of the challenger accumulator is below E_0 , then e^{rev} cannot even reach the threshold $E_{\text{th}}(0) = E_0$ at $\rho = 0$, so **no discretionary switch can ever occur**, and consequently the entire switching dynamics addressed by P1 and P2 becomes inert. That is, even though containment holds (since nothing ever switches), it is not “the maneuver was locked” but rather a degeneracy of “there was never any switching capability to begin with,” and the guarantee loses its meaning. At equality, a binding clip can be attained while a leak equilibrium from below is only approached; the two-sided open condition deliberately avoids that distinction. The designer can preserve a region of $(\lambda, e_{\text{max}}^{\text{rev}})$ that **simultaneously** satisfies containment (upper bound $e_{\text{max}}^{\text{rev}} < E_0(1 + k_\rho)$) and switchability (lower bound $e_{\text{max}}^{\text{rev}} > E_0$); concrete guidance for this is given in the knob tuning of §5.5.

Combined with the non-vacuity lower bound above, this containment condition organizes into the two-sided condition $E_0 < e_{\text{max}}^{\text{rev}} < E_0(1 + k_\rho)$ stated at the start of §4.6 — the lower bound is algebraic reachability headroom at $\rho = 0$ (actual response additionally needs the hypotheses of Proposition 3), and the upper bound is the existence of a nonempty lock region ($\bar{\rho} < 1$). Since both are a lower and

upper bound on the same variable $e_{\max}^{\text{rev}}$, they can be satisfied simultaneously; the separate “above-threshold headroom” requirement ($e_{\max} > E_0(1 + k_\rho)$) would contradict this containment and is not imposed (§4.9). Design is done by adjusting the leak-equilibrium term (via λ) and the clip bound $e_{\max}$ so as to place $e_{\max}^{\text{rev}}$ in the open interval $(E_0, E_0(1 + k_\rho))$, ensuring that a nonempty lock region $(\bar{\rho}, 1]$ exists (design guidance is given in the knob tuning of §5.5).

Once ρ lies in the lock region ($\bar{\rho} < \rho \leq 1$), switching to the opposite `class` is blocked; provided ρ does not retreat to or below $\bar{\rho}$ thereafter (Remark 14), ρ reaches 1 along the lower bound above, and the maneuver completes; the number of cycles to completion is finitely bounded by $K \leq \lceil (L_{\text{plan}} + B)/(v_{\text{lat},\min} \cdot dt) \rceil$ for an uninterrupted commitment. $\square$

Remark 12 (Boundary of the lock region). *The lock region is open at $\bar{\rho}$ by necessity, not by convention. When the clip binds strictly ($e_{\max} < (D_{\max} - \Delta_{\text{floor}})dt/(1 - \lambda)$, so that $e_{\max}^{\text{rev}} = e_{\max}$ is attained), the boundary case is realizable: take $dt = 0.05$, $\Delta_{\text{floor}} = 0.05$, $D_{\max} = 0.95$, $\lambda = 0.5$, $E_0 = 0.03$, $k_\rho = 1$, $p = 1$, $e_{\max} = 0.045$. These values satisfy the two-sided condition (10) — though not the P2 non-vacuity condition (17), since $(D_{\max} - \Delta_{\text{floor}})dt = 0.045 > E_0$; the instance is used here only to exhibit the boundary of the lock region and is not an admissible operating point (Remark 10) — and give $\bar{\rho} = 0.5$; a single cycle at $D_k = D_{\max}$ from $e_{k-1} = 0$ drives e_k to exactly $e_{\max} = 0.045 = E_{\text{th}}(0.5)$, and the switching rule of §4.4 ($e_k \geq E_{\text{th}}(\rho_k)$) fires at $\rho = \bar{\rho}$ exactly. The boundary point therefore belongs to the switching window, and any statement that locking begins “at” $\bar{\rho}$ would be false on this instance. When instead the leak equilibrium is no larger than the clip bound ($(D_{\max} - \Delta_{\text{floor}})dt/(1 - \lambda) \leq e_{\max}$), including equality, e^{rev} approaches $e_{\max}^{\text{rev}}$ from below without attaining it from a below-equilibrium start in finite exact-real updates, and containment in fact holds on the closed region $\rho \geq \bar{\rho}$; we do not use this sharpening, and state P4 uniformly on the open region.*

Remark 13 (Estimated versus realized progress). *P4 is a statement about realized cross-track progress under Assumption 3(d). In every reported experiment ρ is computed from the scripted forward-speed proxy, so a proxy value $\rho = 1$ is not evidence that a lateral maneuver was completed, and the lock it induces is not evidence of physical maneuver success.*

Remark 14 (Non-monotonicity within the locked region). *The above containment does not release once locked, as long as the progress ρ increases monotonically; however, if the disturbance retreat b_k exceeds $v_{\text{lat},\min} \cdot dt$ in a given cycle enough to make ρ behave non-monotonically (ρ rises above $\bar{\rho}$ and then retreats back below $\bar{\rho}$), containment can be temporarily released along that path. Precisely, then, **containment is valid only within the interval where $\rho > \bar{\rho}$ holds, and it is released if ρ retreats to or below $\bar{\rho}$** . For locking to be permanent, in addition to the cumulative-retreat boundedness condition ($\sum_k b_k \leq B < L_{\text{plan}}$, now part of the proposition’s hypotheses), it is also necessary that, once ρ exceeds $\bar{\rho}$, it is realized as never retreating to or below it again (the forward-invariance hypothesis of the completion clause); disturbance paths that fail to satisfy this are handed off to P3/P5 (the safety/availability layer).*

Remark 15. *If the disturbance is unbounded, so that $\sum_k b_k$ exceeds L_{plan} (the corridor is permanently blocked), this is no longer a “maneuver completion” situation but a loss of safety/availability, and P3/P5 (the safety ladder, `HOLD`) take over. That is, P4 is a completion guarantee that holds as long as availability is maintained, and responsibility for loss of availability rests with the safety layer.*

Proposition 6 (Conditional finite-window escalation to `HOLD`). *Let qualifying safety interventions occur at decision times τ_i , at most once per cycle, and define $C_W(t) = \#\{i : t - W < \tau_i \leq t\}$. Suppose the guard records the current event before evaluating C_W , enters `HOLD` whenever $C_W \geq N_{\text{thresh}}$, and retains `HOLD` until explicit external release. If an active episode contains N_{thresh} interventions in one such window, `HOLD` is entered no later than the cycle recording its N_{thresh} -th intervention. If the output adapter enforces `HOLD`, subsequent cycles command zero motion until release.*

Proof. At the threshold event all N_{thrash} timestamps lie in the counted window. The guard therefore enters HOLD in that cycle. The absorbing-mode rule retains HOLD until release, and the assumed output contract supplies zero commands during those cycles. $\square$

Remark 16 (No unconditional termination or collision guarantee). *This is a conditional guard contract. Events at $t = 0, 4, 8, \dots$ with $W = 3$ s never exceed one event per window and can continue indefinitely. A rolling-window guard alone therefore does not exclude infinite sparse oscillation or guarantee episode termination. A global event budget or deadline would be an additional design. Zero commanded motion neither implies instantaneous physical stopping nor proves collision freedom in a moving environment. P3 specifies branch priority; P5 specifies conditional escalation, not deadlock recovery or physical safety. The reference implementation records at most one safety intervention per decision time, prunes the open-left window $(t - W, t]$, and synchronizes `n_thrash` to that window count before testing the threshold. HOLD returns a zero target command and is retained by the decision core until an explicit `release_hold()` call clears the episode state. These software checks establish the guard contract only; they do not establish physical stopping or collision freedom.*

4.7 An observer model of legibility and an operational definition of time-to-legible

To make the legibility claim measurable, we must define “when does an observer become confident of the passing side.” This paper operationalizes time-to-legible using a **Bayesian observer model**.

Let the hypothesis space be the passing side $H \in \{L, R\}$; the observer performs a Bayesian update of the posterior $P(H \mid o_{0:t})$ from the robot’s observable motion cues (lateral offset, heading, curvature, the trajectory $o_{0:t}$ up to time t).

$$P(H \mid o_{0:t}) \propto P(o_{0:t} \mid H) \cdot P(H), \quad (23)$$

where the likelihood $P(o_{0:t} \mid H)$ is given by an expected motion model under each hypothesis (e.g., the standard trajectory distribution for yielding to that side). **This likelihood motion model is treated as an observer-side prior, independent of this paper’s decision policy.** That is, the observer model does not see the robot’s internal cost J or accumulator state, and assigns the likelihood for each hypothesis solely from the externally observable kinematic trajectory. This is to prevent the evaluation metric from circularly favoring the very policy under evaluation by copying it; the likelihood model is fixed (following the observer-inference perspective of the legible-motion literature [9]) as a generic “lateral avoidance trajectory distribution.” **This likelihood model is applied identically to the proposed method and all baselines, providing a common scoring convention rather than evidence of construct validity or unbiased human perception. All policies’ decision streams are scored under the same observer prior, but this decision-stream proxy does not by itself validate motion legibility.** **time-to-legible** is defined as the earliest time at which the posterior exceeds a threshold p^* (e.g., 0.9) and remains so thereafter.

$$t_{\text{legible}} = \min\{t : P(H^* \mid o_{0:\tau}) \geq p^* \ \forall \tau \in [t, t + \Delta_{\text{hold}}]\}, \quad (24)$$

where H^* is the actually realized passing side and Δ_{hold} is a hold window excluding transient overshoots. This definition applies identically to both (i) an automatically computable **proxy metric** (obtained by running the observer model over simulation logs) and (ii) a **user study** asking human perception (protocol in §5.6). A policy that oscillates fails to stabilize its posterior above the threshold, making t_{legible} late or undefined, whereas a policy that commits fixes the posterior early, advancing t_{legible} — this is the measurable core of this paper’s legibility claim. The offline harness does not compute this fixed- Δ_{hold} quantity; it reports the related but distinct endpoint-suffix statistic t_{sfx} defined in §5.1. Observer-model parameters (the likelihood motion model, p^* , Δ_{hold}) are configuration values, and

their sensitivity (§5.5) and correlation with human judgment are left to the user-study protocol of the planned evaluation (§5.6).

Limitation of the population-independence assumption of the likelihood model. This model fixes the likelihood motion model as a single generic “lateral avoidance trajectory distribution,” but since intent attribution in fact depends on an observer’s culture, age, and familiarity with robots, and legibility is itself a social construct, this assumption of assigning the same likelihood to all observer populations is only an approximation and has the limitation that it cannot capture population-specific variation in legibility (quantifying this limitation is possible only with human data from the §5.6 user study).

4.8 Handling clusters, F-formations, and vulnerable pedestrians

Interaction-based groups (F-formation). If the merge rule of §4.1 is based on spatial proximity alone, a group of people conversing can be seen as “just two nearby people,” opening a corridor between them and splitting the group. To prevent this, we extend merge/group judgment with **interaction cues**. If two people i, j satisfy (i) sustained mutual proximity over some duration, (ii) mutual orientation (headings pointed toward a common o-space center, per Kendon’s F-formation), and (iii) low relative velocity (walking together or standing in conversation), we bind them as a **social group**, and the handling of the **class** that splits between them (passing between the two) follows one of two approaches, chosen by the following criterion. In situations with a strong social norm under which passing between a group should never be geometrically permitted (e.g., a clearly identified stationary conversation group, or a group including a vulnerable pedestrian), the **class** in question is **excluded from availability** ($J = \infty$); in situations where the norm is weaker or group-detection confidence is low enough that excluding availability would be excessively conservative, it is instead suppressed with a **large soft penalty**, leaving room as a fallback if all other corridors are blocked. That is, exclusion from availability expresses “never split,” while the soft penalty expresses “avoid splitting where possible, but allow it as a last resort.”

F-formation detection is assumed to be an external module. This paper does not claim F-formation detection itself as a contribution, and assumes that group composition and o-space estimates are provided by an external perception module. Primary literature on automatic F-formation detection includes the graph-cut-based GCFF [22] and subsequent cluster-based detectors, and this decision layer takes their output as input — group membership and an o-space center; where a detector (e.g., GCFF) does not output an o-space radius explicitly, the radius is derived from member positions. The o-space concept follows [19], as surveyed in [20]. This incorporates the social norm “do not split an interacting group” into the decision layer. Simple clusters (accidental proximity without interaction) are handled as coarse **classes** under the existing merge rule as before. However, when a route is chosen that goes **around** a group without splitting it, the social cost asymmetry depending on which side is taken (the side that blocks the conversational sightline of the F-formation’s o-space versus the side that does not) is outside the scope of this paper and is noted as future work (Section 6).

Accommodation of vulnerable pedestrians. When vulnerable pedestrians — children, the elderly, wheelchair users, etc. — are identified (assuming an external perception module provides attribute tags), for that person we (i) widen the proxemics width σ to secure a larger social distance, (ii) raise the passing-side commitment threshold E_0 and dwell to pass more conservatively (less hastily), and (iii) raise the safety distance d_{safe} and TTC_{min} . Additionally, near vulnerable pedestrians we further raise the cost of rear/blind-spot passing (raising σ_{rear}) to reduce surprise.

Bounding the freezing side-effect of conservative defaults. However, if the above conservative knobs (especially raising E_0/dwell) are increased without limit, the robot may delay passing excessively, causing a freezing side-effect. Accordingly, this policy applies vulnerable-pedestrian conservatism **only within a finite bound**, and if the resulting inability to commit to any corridor persists

for a certain duration, this is treated as a deadlock and **handed off to P5’s HOLD (stop-and-wait)**. That is, the conservative default is responsible only for “more cautious passing,” but a time-based freezing detector is an additional implementation requirement: the finite-window safety-event guard in P5 alone does not detect a persistent lack of discretionary switching.

Policy under misclassification and ethical limitations. Because the estimation of vulnerable-pedestrian attributes may be uncertain or misclassified, this decision layer adopts a **conservative default under uncertainty**. That is, if attribute confidence is below a threshold, the person is provisionally treated as a vulnerable pedestrian and the above conservative knobs (σ , E_0 , d_{well} , d_{safe} , TTC_{min} raised) are applied — the principle being that “losses in safety and comfort due to misclassification should be biased toward the conservative side.” However, since attribute classification itself may carry bias, privacy, and stigmatization concerns, this paper does not claim classifier design or fairness as a contribution and explicitly states this as an ethical limitation (Section 6). Determination of concrete margin values and their effects is left to user/field evaluation, i.e., the planned evaluation (§5.6).

4.9 λ vs. simple dwell timer, and analysis of e_{max} saturation

λ (leaky accumulation) vs. simple dwell timer. A simple dwell timer is a rule that “switches if the challenger has held the advantage continuously for T_{dwell} ,” looking only at the **continuous persistence** of the advantage. In contrast, the leaky accumulation $e_k = \text{clip}(\lambda e_{k-1} + (D_k - \Delta_{\text{floor}})dt, 0, e_{\text{max}})$ looks at the **time integral of the advantage together with a leak**. The analytical differences between the two rules are as follows.

- **Handling of intermittent advantage.** A simple dwell timer resets the moment the advantage is interrupted even once, which can permanently block a legitimate switch in an ambiguous configuration where the advantage holds “almost always but occasionally breaks.” Leaky accumulation treats an interruption only as a leak (not a reset), so if the advantage is sufficient on average, the accumulation crosses the threshold and switching occurs. That is, leaky accumulation replaces the simple dwell’s **brittle reset** with smooth decay. This brittleness is a property of the persistence form tested here. It has not been tested for selectors that combine a post-switch minimum dwell with an improvement threshold [42, 36].
- **Shape dependence.** As the core of this comparison, threshold attainment under leaky accumulation depends not on the simple integral of the advantage but on its **temporal shape**. A strong advantage arriving as a pulse shorter than the time constant $\tau_{\text{leak}} = -dt/\ln \lambda$ ($\lambda < 1$; a per-update constant whose physical value changes with the interval, Remark 9) accumulates before it can leak away and triggers a switch, while a weak advantage spread over a duration longer than τ_{leak} is offset by leaking and falls short of triggering a switch. The simple dwell timer has no such notion of a time constant, only a single axis of “continuous duration.”
- **Coincidence in the special case.** If $\lambda = 1$ (no leak) and the advantage is a constant $\bar{D}$, leaky accumulation becomes a **linear integrator** that switches at $t = E_{\text{th}}/(\bar{D} - \Delta_{\text{floor}})$, which, expressed in terms of time-to-threshold, is equivalent to a dwell timer. That is, a simple dwell timer is the special case of leaky accumulation in the $\lambda \rightarrow 1$, constant-advantage limit. The reason for introducing $\lambda < 1$ is precisely to obtain the shape-dependence above (the ability to forget old, weak evidence).

This quantitative comparison (switch count and legibility for λ leaky accumulation vs. a simple dwell) is **measured** in the ablation of §5.1 as a “simple dwell” variant (separate from the immediate argmin without the accumulator term) (Table 2 and Table 3 of §5.3). In particular, the above first-item

prediction — that the simple dwell’s reset brittleness under intermittent advantage blocks legitimate switching — is indeed observed (0 switches for the simple dwell versus 1 switch for the proposed method in **intermittent**; detailed interpretation in §5.3).

The role of $e_{\max}$ saturation. The upper clip $e_{\max}$ serves two roles. (i) **Prevention of windup.** If a strong advantage persists for a long time, e can grow unboundedly, causing integrator windup in which e stays above the threshold for a long time even after the advantage disappears. $e_{\max}$ bounds the accumulation, so when the advantage disappears, the leak acts quickly starting from $e_{\max}$, restoring responsiveness. (ii) **Post-switch symmetry.** Combined with the $e \leftarrow 0$ reset immediately after switching, $e_{\max}$ prevents an “already sufficiently decided” advantage from accumulating further and prematurely advancing the next switch.

Why no above-threshold headroom condition is needed, and the reachability-headroom condition. One might require that “if $e_{\max}$ is too small, it saturates before reaching E_{th} in P2’s switching argument and blocks switching, so $e_{\max} > \max_{\rho} E_{\text{th}}(\rho) = E_0(1 + k_{\rho})$ (above-threshold headroom) is a soundness condition,” but this headroom condition is **not needed and would be wrong**, for two reasons. (i) What P2 guarantees is a **lower bound** on the switching interval (an upper bound on switching rate), and this lower bound holds regardless of the clip — saturation can only delay or block threshold attainment, never advance it, so the switching-rate bound does not break even if $e_{\max}$ becomes smaller (the P2 argument). (ii) Requiring $e_{\max}^{\text{rev}} > E_0(1 + k_{\rho})$ would make $e_{\max}^{\text{rev}} > E_{\text{th}}(\rho)$ hold for all $\rho \in [0, 1]$, so that no containment threshold $\bar{\rho} < 1$ could exist, colliding head-on with P4’s containment — this is why the condition cannot be imposed.

What saturation actually threatens is not the switching-rate bound but **switchability itself**. If the reachable bound is strictly below the baseline threshold ($e_{\max}^{\text{rev}} < E_0$), no discretionary switch can occur from the zero-evidence initial state. Equality must be distinguished: a binding clip $e_{\max} = E_0$ can be reached in finite updates when the sustained-input leak equilibrium exceeds E_0 , whereas an equilibrium equal to E_0 is only approached from below in finite exact-real updates. Thus $e_{\max}^{\text{rev}} \leq E_0$ is not a blanket no-switch condition. The open design condition below provides algebraic reachability headroom; actual response still requires the selected-challenger hypotheses of Proposition 3:

$$e_{\max}^{\text{rev}} > E_0 \quad (\text{algebraic headroom at } \rho = 0, \text{ not unconditional liveness}) \quad (25)$$

which, combined with the P4 containment upper bound, becomes the single two-sided condition $E_0 < e_{\max}^{\text{rev}} < E_0(1 + k_{\rho})$ (§4.6). That is, the precise formalization of the design intent is that initial switching headroom exists at $\rho = 0$ (lower bound, subject to the response theorem’s input/selection conditions) and reversal is blocked once the maneuver has sufficiently progressed ($\rho > \bar{\rho}$) (upper bound); since both requirements are a lower and upper bound on the same reachable bound $e_{\max}^{\text{rev}} = \min(e_{\max}, (D_{\max} - \Delta_{\text{floor}})dt/(1 - \lambda))$, they can be satisfied simultaneously without conflict. The sensitivity analysis sweeping $e_{\max} \cdot \lambda \cdot k_{\rho}$ around this condition is designed in §5.5; the measurement of the progress-hardening-related axis (ρ -driven rate) is given in §5.3, and measurement of the remaining axes is left to the planned evaluation (§5.6).

5 Experiments

This section **reports as results only what was actually measured**. The behavioral consistency, a decision-stream observer statistic, and the per-cycle latency of the decision layer are **measured** with an offline harness that drives the actual decision core, and are presented in §5.3 (ablation and ρ -sweep) and §5.4 (per-cycle latency); the harness setup and metrics are given in §5.1–5.2, and the sensitivity-analysis design is given in §5.5. Performance metrics that require physical simulation or a real robot, the external baselines, and the user study were not measured and are therefore not presented as results; their protocols are specified in §5.6 **Planned Evaluation**, fixed in advance of measurement, with per-case values still to be bound before any run. No measured value is fabricated.

5.1 Offline decision-layer harness — setup and variants

The measurements in this section are obtained by driving the **actual decision core** (`DecisionCore`) with the `compass_eval` offline harness across 5 reproducible encounter scenarios $\times$ 50 seeds $\times$ 6 variants ($dt = 0.05\text{ s} = 20\text{ Hz}$, horizon 10 s; behavioral rerun CPU AMD EPYC 9V74; historical latency CPU AMD Ryzen 5 5500GT). For a fixed C++ standard library (see Standard-library dependence below), all figures are computed deterministically from the decision stream, and the raw data (`compass_eval/results/ablation_raw.csv`) are released. What this harness measures is the decision layer’s behavioral consistency, a decision-stream observer statistic, and per-cycle latency; performance metrics that require physical simulation (success rate, collision rate, minimum social distance, lateral jerk) and the external baselines / user study are separated into the Planned Evaluation (§5.6).

The scenarios are ambiguous tie (**near_tie**), transient spike (**transient_spike**), mid-course reversal (**mid_reversal**), clean advantage (**clean_commit**), and intermittent advantage (**intermittent**). The measured configurations and internal comparators are the proposed method (full) and $-$ hysteresis ($\Delta_{\text{floor}} = 0$), $-$ progress hardening ($k_p = 0$), $-$ accumulator (immediate argmin), **simple dwell** (a continuous-persistence, or debounce, timer in place of leaky accumulation: the challenger must be strictly better for 12 consecutive cycles (0.6 s), any interruption resets the count, and no margin is applied; it is not a post-switch minimum dwell combined with an improvement threshold of the kind in switching-system theory [42] or concurrent work [36]; comparison in §4.9), and a **synthetic correspondence-loss stress comparator** (historical CSV key: $-$ class correspondence). This last comparator randomly selects a label when $|J_R - J_L| < 0.10$ and otherwise uses argmin; it also lacks the accumulator, so it is not an isolated removal of class correspondence from COMPASS. Immediate argmin and simple dwell are separate comparator policies, whereas only $-$ hysteresis and $-$ progress hardening are knob-only core ablations. The $-$ safety-override variant is equivalent to the proposed method in offline scenarios that contain no safety event (its effect lies in the collision regime), so it is excluded from this measurement set; its evaluation belongs to the physical-simulation evaluation (§5.6). No external comparator is evaluated. In particular, the harness includes neither a previous-class consistency weight of the kind used by de Groot et al. [25] and SHINE [31], nor an opinion-dynamics passing rule [32], nor a dwell-plus-relative-improvement selector as in concurrent work [36]; the 0.6 s simple dwell is the only fixed-dwell rule tested. The results therefore do not show that evidence accumulation outperforms these mechanisms; that comparison is planned (§5.6).

Legibility (time-to-legible) is computed by applying the §4.7 Bayesian observer to the decision stream, but because the offline harness has no realized trajectory, the observer here consumes the **per-cycle committed passing side (the decision stream) as a proxy observation** in place of the kinematic motion cues specified in §4.7, using log-odds updates to avoid posterior saturation, with a symmetric misread likelihood parameter ε — an assumed observation error probability, not separately sampled corruptions of the stream ($\varepsilon = 0.2$, $p^* = 0.9$ in this measurement). This is an additional simplification of the §4.7 kinematic-cue observer (implementation: `src/compass_eval/include/compass_eval/harness.h`). **The offline statistic is not t_{legible} with a fixed Δ_{hold} .** We report the *endpoint-suffix time* t_{sfx} : the first sample of the maximal final run of samples whose posterior for the final output side is at least p^* . A value is reported only if at least 0.30 s of observed follow-up follows that first sample; otherwise, including a crossing at the final sample, the trial is censored at the 10 s horizon. The 0.30 s follow-up length was chosen after the review of the log-odds-only version (PR 12) found 22 final-sample-only crossings; it was not preregistered, and no sensitivity over this length is reported. Because the suffix is anchored at the end of a finite log, t_{sfx} is neither a fixed positive-hold implementation nor a conservative bound on t_{legible} . It measures the stability of the decision stream, not motion or human legibility; the kinematic-cue observer and human validation are left to the planned evaluation (§5.6). The censoring rate is the fraction of trials with no reported t_{sfx} (right-censored).

Input and counting conventions. The archived scenario generator supplies unclipped Gaussian

perturbations directly to `step_evals`; that distribution is not bounded almost surely. It is a scripted robustness experiment, not an empirical verification of P1/P2’s bounded-input hypothesis or the normalized production-cost path. Bounded deterministic/property tests provide separate software checks. All six policy streams use the same switch-count convention $\sum_{i=1}^{n-1} [s_i \neq s_{i-1}]$: the initialized class to first emitted output is excluded for every policy. Thus an argmin choice of L on its first output in `clean_commit` records zero subsequent transitions, not an absence of an initial decision. This boundary convention is retained for archived reproducibility and is distinct from the opportunity scorer’s response-event accounting.

Observer result versions. The original main snapshot at 9fe495a used probability-space updates, whose posterior rounds to exactly 1.0 and then absorbs later reversals. The log-odds-only observer (PR 12, 5343d457) is the saturation-only numerical correction. The current results additionally apply the post-hoc 0.30 s follow-up rule, a metric-definition change. All three versions are retained as raw CSVs in `src/compass_eval/results/observer_versions/`, together with a per-row comparison of the same 1,500 decision streams; each version column is regenerated from source and checked against its archive, and switch, sign-change and entropy columns are identical across versions. The numerical correction changes 200 rows (all become uncensored). The follow-up rule changes 47 further rows, all in the immediate-argmin and synthetic correspondence-loss comparators (all become censored); the proposed method and the two knob-only ablations are identical under both log-odds versions. These versions must not be pooled.

Standard-library dependence. The scenario generator draws its perturbations with `std::normal_distribution`, and the synthetic correspondence-loss comparator draws its random label with `std::uniform_int_distribution`. The C++ standard fixes the `std::mt19937` sequence but leaves these distribution algorithms to the implementation, so the realized inputs depend on the standard library. All offline-harness values in this paper (R1 and R5, including those quoted in the abstract, introduction, figure captions and conclusion) are libstdc++ (GCC) results; the archived latency figures are a separate, machine-dependent measurement. Building the unchanged harness against LLVM libc++ (versions 18 and 23, Linux x86-64) changes 425 of the 1,500 rows. For the proposed method and the two knob-only ablations, the switch count, sign-change rate and entropy are identical in all 750 rows, and no encounter exceeds one switch; only t_{sfx} moves (full: 1.33 to 1.34 s). The comparator values move: immediate argmin goes from 29.74 to 30.22 switches per encounter, the synthetic correspondence-loss comparator goes from 37.20 to 37.24 switches with censoring 71/250 to 65/250, and one simple-dwell `near_tie` encounter gains a switch (0.00 to 0.02 per encounter). In R5 the switched fractions (50/50 up to 0.20 m/s, 0/50 from 0.35 m/s), and hence the blocking interval, are unchanged, and the mean t_{sfx} values move by at most 0.03 s. In this comparison the qualitative separation is therefore unchanged, but exact digits, including the proposed method’s t_{sfx} , are specific to the library. The libc++ outputs are kept separately in `src/compass_eval/results/stdlib_sensitivity/` and must not be pooled with the canonical results. An external rerun, documented in `docs/reviews/omnilink-reproduction-2026-09-14.md`, first exposed this dependence on the historical harness.

5.2 Metrics

- **Headline (directly tied to the contribution):** decision-switch count per encounter (excluding safety-justified switches — here “safety-justified” is determined by the §4.4 safety-branch log, i.e., a safety-triggered switch fired by $c^* \notin \mathcal{S}$ at stage 2 of the §4.5 algorithm; only switches marked by this log are excluded from the headline aggregate), lateral-command sign-change rate or decision entropy, legibility metrics (time-to-legible and illegibility rate (right-censoring rate) computed with the observer model of §4.7, plus the human judgments that the Planned Evaluation’s (§5.6) user study will provide). Offline, only the decision-stream statistic t_{sfx} and its

censoring rate (§5.1) are available.

- **Delineation of what is measurable now.** Of the headline items above, those computable from the decision stream (switch count, sign-change rate, decision entropy, and the t_{sfx} statistic with its censoring rate) are measured in this section (§5.3). Lateral jerk, which requires trajectory realization, and standard (safety/efficiency) metrics (success rate, minimum social distance, etc.), which depend on physical simulation, have their definitions and reporting protocols placed in the Planned Evaluation (§5.6).

5.3 Results — behavioral consistency and legibility (offline harness, measured)

Interpretation — strongly confirmed findings. (i) **Oscillation control (core claim).** The immediate-argmin and synthetic correspondence-loss stress comparators produce about 98 decision changes per encounter in the ambiguous-tie scenario, whereas the proposed method maintains commitment at 0 (Figure 4). The two distributions do not overlap in range (proposed method entirely 0 vs. –accumulator 98.16 ± 7.85 , non-overlapping observed ranges), so the observed separation is complete within these runs, not a statement about distributional support. Because the core separation in this offline measurement is categorical, a formal test would not change the conclusion, so we omit one here; Mann-Whitney U tests, effect sizes, and confidence intervals are reported for the physical performance metrics of the Planned Evaluation (§5.6). The 0.6 s simple dwell also records 0 switches in `near_tie` (Table 3), so this separation shows that filtering suppresses tie-induced flips; it does not single out evidence accumulation. The two rules differ in `transient_spike`, `mid_reversal` and `intermittent`. (ii) **Spurious-input suppression.** In the transient-spike scenario, the proposed method has 0 switches (spike ignored), while argmin has 2 (entering and returning). The simple dwell has 2, because the 1 s spike outlasts its 0.6 s persistence window. (iii) **Rapid commitment.** In the clean-advantage scenario, the proposed method has 1 switch, with t_{sfx} 2.37 s. (iv) **Decision-stream observer statistic.** The oscillatory variants are frequently censored because the posterior fails to stabilize (argmin and synthetic –class censoring 72/250 and 71/250, respectively, under the post-hoc 0.30 s follow-up rule; `near_tie` t_{sfx} 7.9 s vs. 0.05 s for the proposed method). This is a property of the scored label streams, not a measured human or motion legibility result.

Interpretation — findings that diverged from the design-stage hypothesis (correction by measurement). –Hysteresis ($\Delta_{\text{floor}} = 0$) and –progress hardening ($k_{\rho} = 0$) showed **no observed regression** relative to the proposed method in these scenarios. Because the leaky accumulator’s threshold E_0 and leakage already reject zero-mean noise, the primary oscillation-suppression mechanism in this operating regime is not Δ_{floor} or k_{ρ} but the **accumulator** itself. In other words, the design-stage hypothesis, stated before measurement, that “–hysteresis $\rightarrow$ switch-count blowup” does not hold under the leaky-accumulator design, and this is a **hypothesis correction** provided by the ablation measurements. In `intermittent`, the proposed method switches once at 1.55–2.10 s across the 50 seeds and has 0/50 censored trials, with mean t_{sfx} 4.11 s. The earlier report of 50/50 censoring resulted from floating-point posterior saturation, not a late-horizon switch. Computing the same observer in log-odds space removes this numerical absorbing state without changing the decision policy or observer likelihood; these `intermittent` values are identical under the saturation-only version and the current version, which additionally applies the separate post-hoc 0.30 s follow-up rule. In the same scenario, simple dwell never completes the justified switch because intermittent advantage keeps resetting the timer (0 switches), but because it remains in the initial `class`, it is scored immediately by the observer (0/50 censored, t_{sfx} 0.05 s) — a case where the observer statistic alone masks the switching failure. Simple dwell’s total censoring (50/50) occurs not in `intermittent` but in `mid_reversal` (after the mid-course switch, the posterior fails to re-stabilize by the end of the horizon), whereas in the same scenario the proposed method maintains commitment (0 switches) and is scored

Table 2: Aggregate behavioral consistency and the decision-stream endpoint-suffix statistic (mean $\pm$ SD across all scenarios, $N = 250$; best per column in bold, ties included) — all columns measured. Performance metrics that depend on physical simulation (social distance, collision, success rate, lateral jerk) are not yet measured and are therefore not included in this table; their definitions and protocols are in §5.6. The pooled $N = 250$ mean $\pm$ SD is a mixture statistic across 5 heterogeneous scenarios; the SD includes cross-scenario mixture variance in addition to seed-to-seed variance (per-scenario breakdown in Table 3 and `compass_eval/results/R1_ablation.md`). The t_{sfx} mean $\pm$ SD (§5.1; not t_{legible} with a fixed hold) includes right-censored trials imputed at the horizon value of 10.0 s, so it must be read together with the censoring-rate column (censoring-rate differences across variants affect comparability of means); the no-imputation, survival-analysis-based aggregation (§5.6 convention) applies in the planned evaluation.

Variant	Switches/enc.↓	Sign-change (/s)↓	Entropy (bits)↓	t_{sfx} (s)↓	Censored
Full (proposed)	0.40±0.49	0.040±0.049	0.018±0.022	1.33±1.66	0/250
–Hysteresis	0.40±0.49	0.040±0.049	0.018±0.022	1.00±1.20	0/250
–Progress hardening	0.40±0.49	0.040±0.049	0.018±0.022	1.31±1.65	0/250
–Accumulator (argmin)	29.74±36.70	2.974±3.670	0.420±0.374	3.60±4.64	72/250
Simple dwell (0.6 s)	0.80±0.75	0.080±0.075	0.034±0.031	2.26±3.90	50/250
–Class correspondence	37.20±36.12	3.720±3.612	0.515±0.401	3.60±4.63	71/250

Table 3: Switches/encounter by scenario (mean $\pm$ SD, $N = 50/\text{cell}$) — the table in which oscillatory regression is most clearly evident.

Variant	near_tie	transient_spike	mid_reversal	clean_commit	intermittent
Full (proposed)	0.00±0.00	0.00±0.00	0.00±0.00	1.00±0.00	1.00±0.00
–Hysteresis	0.00±0.00	0.00±0.00	0.00±0.00	1.00±0.00	1.00±0.00
–Progress hardening	0.00±0.00	0.00±0.00	0.00±0.00	1.00±0.00	1.00±0.00
–Accumulator (argmin)	98.16±7.85	2.00±0.00	13.44±3.48	0.00±0.00	35.12±2.40
Simple dwell (0.6 s)	0.00±0.00	2.00±0.00	1.00±0.00	1.00±0.00	0.00±0.00
–Class correspondence	98.12±6.37	2.00±0.00	46.00±4.75	0.00±0.00	39.88±4.11

immediately with 0/50 censoring. However, the proposed method’s zero switches in `mid_reversal` is the flip side of this same masking effect: at the default knobs the accumulator does not track the late-horizon reversal within the 10 s log (in the scenario script the mean challenger advantage ramps linearly from -0.25 to $+0.25$, i.e., $5 \times \Delta_{\text{floor}}$, by the end of the horizon; `harness.hpp:56`), and because the final label equals the initial label the observer scores the stream immediately. We report this as an observed outcome of this scripted experiment, not as a prediction of the analysis. Proposition 3 does not explain it: its response bound N_{resp} is an *upper* bound on the time to switch that applies only while a persistent advantage stays above some $D_{\text{sus}} > \Delta_{\text{floor}}$, and it gives no lower bound on response time, so the fact that the window in which the mean advantage exceeds the reachability level 0.23 is shorter than N_{resp} does not imply that no switch occurs. Its converse (no-switch) part needs an almost-sure upper bound $D_k \leq \bar{D}$ with $(\bar{D} - \Delta_{\text{floor}})dt \leq (1 - \lambda)L$ over the window, which the unbounded Gaussian perturbations ($\sigma = 0.03$) of this scenario do not supply. A noiseless-ramp calculation therefore describes a different input and is not evidence about the noisy runs. Whether the zero-switch outcome is a missed warranted switch, and how long a response to it may take, can only be scored against an independently labelled opportunity with an onset and a response deadline (§5.6), which this harness does not supply. The switch-count and observer columns here therefore neither confirm responsiveness nor establish a response failure; they are consistent with the conservatism cost

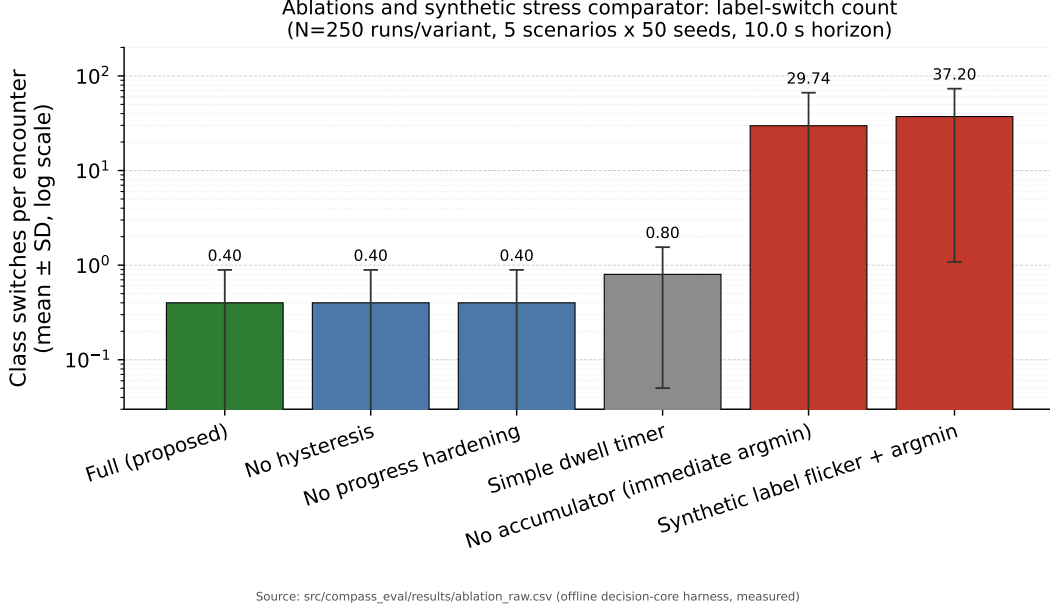


Figure 4: Class-switch count per encounter by variant (mean $\pm$ SD, log scale; $N = 250$ per variant, 5 scenarios $\times$ 50 seeds, 10.0 s horizon). The immediate-argmin policy and synthetic correspondence-loss stress comparator yield 29.74 and 37.20 decision changes per encounter, respectively, whereas the proposed method (full) maintains commitment with 0.40. Removing $-$ hysteresis or $-$ progress hardening alone shows no observed regression in this scenario set, supporting the accumulator configuration’s suppression of fluctuations in this scenario set; the synthetic comparator does not identify the causal effect of correspondence. Raw data: `src/compass_eval/results/ablation_raw.csv` (measured, not fabricated).

noted in §4.3. Separately, and not as an explanation of this scenario, clip-induced lockout is a distinct, noise-independent mechanism: whenever $E_{\text{th}}(\rho_k) > e_{\text{max}}$ no discretionary switch can fire in that cycle regardless of the advantage (Remark 11); it applies to the ρ -rate sweep below, whereas `mid_reversal` keeps $\rho \leq 0.5$ and $E_{\text{th}} \leq 0.375 < e_{\text{max}}$ throughout. Finally, the t_{sfx} and censoring-rate figures in this section, obtained from the decision-stream observer of §5.1, measure the stability of the decision stream, not an independent axis of motion legibility, as already noted.

ρ -rate sensitivity and offline transition blocking. The effect of progress hardening depends strongly on the ρ drive rate. Measuring in the scripted `clean_commit` decision-core harness while raising its progress input v_{lat} from 0.05 to 0.50 m/s, the proposed method always commits (50/50, $t_{\text{sfx}} \approx 2.4$ s) for $v_{\text{lat}} \leq 0.20$ m/s, but **switching is blocked (0/50) for $v_{\text{lat}} \geq 0.35$ m/s**. This is because a rapidly saturating ρ raises E_{th} to $E_0(1 + k_\rho) = 0.60$, blocking even justified switches — the clip obstruction in Proposition 3 gives a noise-independent blocking mechanism: with the scenario’s advantage of +0.40 the leak equilibrium is $(0.40 - \Delta_{\text{floor}}) dt / (1 - \lambda) = 0.583 < 0.60$, in the noiseless constant-advantage model; independently, the clip bound $e_{\text{max}} = 0.50 < 0.60$ blocks every discretionary switch after saturation regardless of noise, whereas in the same noiseless model at $\rho = 0$ the advantage would switch within the upper bound $N_{\text{resp}} = 24$ cycles (1.2 s). The noisy runs are not covered by these noiseless calculations; whether the switch wins the race against the rising threshold before the clip lockout is what the sweep measures empirically; the **offline transition-blocking interval is $v_{\text{lat}} \in (0.20, 0.35)$ m/s**. This is a sensitivity of the scripted input and the core’s former simplification $v_{\text{lat}} = |v_{\text{cmd}}|$; it does not demonstrate robot immobility, physical freezing, or goal failure. It motivates separating measured cross-track progress from forward speed (`compass_eval/results/R5_rho_sweep.md`).

Reproduction. From a fresh ROS workspace, build the evaluator and its workspace dependencies with `colcon build --base-paths src --packages-up-to compass_eval`. Run its `ablation` mode with output directory `/tmp/compass_rerun` for a separate CSV and stdout summary; `latency` and `rho_sweep` print their summaries. Do not overwrite archived results when reproducing. Figure sources are in `paper/figures/scripts`; archived latency is machine/toolchain dependent and is not expected to reproduce exactly. Exact values are specific to `libstdc++`; `scripts/check_stdlib_sensitivity.sh` checks the canonical R1 CSV and R5 table with `g++` and, when a `libc++` toolchain is available, the committed `libc++` sensitivity record. The repository README and result-provenance record give the maintained commands and evidence versions.

5.4 Real-time performance and enumeration-complexity analysis (measured)

Enumeration complexity (analytical bound). The current core enumerates 2^K labels with $K = \min(N_{\text{people}}, K_{\text{cap}})$ and evaluates each candidate before forming its safe set. At the default $K_{\text{cap}} = 3$, that is at most eight labels. This is a configured enumeration bound, not evidence that influence ranking, coarse group merging, or a particular pruning distribution has been implemented. The cost of each evaluation also depends on rollout samples, people, and environment queries; the distribution of the resulting $|\mathcal{S}_k|$ in physical scenes remains unmeasured. The ideal pruning/lifecycle design in §4.1 is not a reason to treat the present loop as evaluating only already-safe classes.

K_{cap} operating rule. The current implementation retains the first K_{cap} people in input order as explicit class dimensions, with default value 3. It does not compute an influence ranking or merge overflow people into coarse classes. Input selection and ordering therefore matter. Person-cost and safety queries can still examine the supplied people beyond those label dimensions, but that is not a guarantee of a realized passing-side relationship for them.

Historical finite-batch timing. The archived `compass_eval` latency experiment measured `DecisionCore::step` on an AMD Ryzen 5 5500GT with Radeon Graphics for 20,000 iterations per condition, using all 2^K enumerated labels and an all-safe environment fixture. The observed p99/max pairs are 2.6/153.6 μs at $K = 1$, 7.9/356.1 μs at $K = 2$, and 58.6/651.3 μs at $K = 3$. The largest observed maximum is about 1.30% of a 50 ms (20 Hz) period. These are finite-batch measurements, not a proven worst-case execution-time (WCET) bound or an upper bound on deployment latency. The loop evaluates the enumerated candidates before constructing $\mathcal{S}_k$; its work also depends on all supplied people, rollout samples, and environment-query costs, not only $|\mathcal{S}_k|$. Limiting explicit label dimensions does not independently bound all these costs. This historical measurement does not benchmark the new candidate adapter, live costmap access or the end-to-end ROS 2 pipeline (callbacks, TF, controller dispatch, DDS/executor jitter). Those timings and the physical-scene safe-set distribution remain separate evaluation targets.

5.5 Sensitivity analysis design

The sensitivity of the proxemics and convention parameters is designed as follows. Among these, the ρ -drive-rate (v_{lat}) axis of progress hardening has already been measured in §5.3 as an offline transition-blocking interval, $v_{\text{lat}} \in (0.20, 0.35)$ m/s; measurement of physical freezing and of the remaining axes remains for the Planned Evaluation (§5.6).

- **$\sigma_{\text{front}}/\sigma_{\text{rear}}/\sigma_s$ sweep.** Each parameter is grid-searched over the range $[0.5\times, 2\times]$ of its baseline value, recording the headline and standard metrics to produce sensitivity surfaces. In particular, we confirm whether increasing σ_{rear} reduces the frequency of rear/blind-spot passing.
- **Traffic-side (`locale.keep_side`) reversal.** We measure the performance degradation in environments where the right-preference assumption is false (left-hand traffic cultures) or set to

none. A separate performance-sensitivity curve is drawn against the w_r weight.

- **Observer-model parameters** (p^* , Δ_{hold}). We check metric stability against changes in the threshold and hold interval of time-to-legible.
- $e_{\text{max}} \cdot \lambda \cdot k_\rho$. We check switching-rate, windup, and lockup (as defined in §5.6) behavior in regions that violate or satisfy the challenger accumulator’s two-sided conditions (reachability headroom $e_{\text{max}}^{\text{rev}} > E_0$ — §4.9; existence of a nonempty lock region $e_{\text{max}}^{\text{rev}} < E_0(1 + k_\rho)$, $\bar{\rho} < 1$ — P4). In particular, we measure how λ shifts the containment threshold $\bar{\rho}$ via the reachable upper bound $e_{\text{max}}^{\text{rev}} = \min(e_{\text{max}}, (D_{\text{max}} - \Delta_{\text{floor}})dt/(1 - \lambda))$. **Knob-tuning guidance (simultaneously satisfying containment vs. switchability)**. As discussed in the non-vacuity argument of §4.6, if the leak-equilibrium upper bound $(D_{\text{max}} - \Delta_{\text{floor}})dt/(1 - \lambda)$ falls below E_0 , the reachable upper bound never reaches E_0 , so no discretionary switch is possible and the P1-P2 switching dynamics become vacuous. For example, with $D_{\text{max}} = 0.5$, $\Delta_{\text{floor}} = 0.05$, $dt = 0.05$, $\lambda = 0.7$, the leak-equilibrium upper bound is $(0.5 - 0.05) \cdot 0.05/(1 - 0.7) \approx 0.075$, which is smaller than $E_0 = 0.3$ — so in the region of short dt , small Δ_{floor} , and $\lambda < 1$, switching capability can unintentionally vanish. Accordingly, this sweep explicitly marks the λ , e_{max} combinations whose reachable upper bound falls within the open interval $(E_0, E_0(1 + k_\rho))$, so that a designer can identify the $(\lambda, e_{\text{max}})$ region that simultaneously satisfies containment ($e_{\text{max}}^{\text{rev}} < E_0(1 + k_\rho)$) and switchability ($e_{\text{max}}^{\text{rev}} > E_0$).
- **Source of normalization constants**. We compare a pre-calibrated constant (recommended, time-invariant map) against a per-cycle min-max statistic (affine-invariant, unit-covariant, but subject to margin drift), measuring how the effective margin drift of Δ_{floor} upon changes in the candidate set affects the switching rate and anti-oscillation metrics when the candidate set changes (verification of the drift analysis in §4.2).

Reporting is mandatory for nonparametric tests (e.g., Mann-Whitney U), effect sizes, stated seed/trial counts, and per-seed variance and confidence intervals.

5.6 Planned Evaluation

This section specifies a protocol, fixed in advance of measurement, for **all evaluations that this paper has not yet measured** — the physical simulation and real-robot setup, physical performance metrics, end-to-end pipeline latency, scenarios, the external baselines and their independent tuning protocol, and the legibility user study. This paper reports no measured values for any of these items. The protocol is not a formal preregistration: seed and trial counts and the per-case oracle values of the physical scenarios are still to be bound before any run. Fixing and publishing it before results exist is intended to limit post-hoc tuning and confirmation bias.

Physical simulation and real-robot setup (planned; not performed for this paper). Simulation would combine Gazebo or Isaac with a reactive pedestrian model (PedSim-family, social-force-based agents) and would be repeated across many seeds; reactive pedestrians are needed to avoid freezing artifacts. Real-robot validation would use a service-robot platform in real corridor-encounter cases, possibly together with a demonstration of the presentation layer’s AR trajectory overlay. **Any such AR overlay demo would be an output of the presentation layer, separate from the decision layer that is this paper’s contribution; it would be presented only as a qualitative demo and would not be included in the quantitative evaluation below.** The number of seeds, number of trials, and environment diversity will be fixed at measurement time but must be stated explicitly when reported. All quantitative comparisons are required to report per-seed variance and confidence intervals (or bootstrap intervals).

Controlling simulator circularity. If J_{social} ’s social-force-based cost and the pedestrian simulator (PedSim/social force) share the same assumptions, the proposed method may overfit to the simulator’s reaction model. To control for this, we (i) also replace the pedestrian model with a **different family** than J_{social} (e.g., ORCA-based, replay-based) to cross-check the robustness of results, (ii) separately report the sim-to-real gap using real-robot encounter cases, and (iii) conduct actual pedestrian-participation experiments where possible. These results are reported after measurement; only the design is fixed in this section.

Definition of physical performance metrics (standard metrics). Success rate, integral of minimum social distance/proxemics intrusion, number of near-misses, physical freezing (defined below), path length, time taken, average speed, human-side disturbance (speed change and detour amount of the reactive person), and lateral jerk, which requires trajectory realization. These are to be filled in as the performance columns corresponding to the measured columns in Table 2, together with the headline metrics of §5.2; no figures are reported before measurement, and no physical performance improvement is claimed until success, collision, minimum clearance and physical freezing have been measured. **Physical freezing** is an interval in which the measured robot speed stays below a stop threshold for at least a minimum duration while the goal is not reached, clearance is adequate and free motion is warranted, and which is not an intentional yield, a commanded STOP, or HOLD; freezing episodes and duration are reported separately from intentional yields and HOLD intervals. Zero decision switches are never counted as freezing, and switch counts are never used as evidence of its absence. The software scorer `scripts/physical_metrics.py` fixes provisional thresholds (0.02 m/s, 2 s, 0.3 m goal distance, 0.5 m clearance) that still require validation.

Warranted-switch evaluation. To separate consistency from non-responsiveness (the concern that decision-stream metrics reward a frozen commitment), the planned evaluation scores decisions against a **warranted-switch oracle** that is defined independently of the algorithm’s evidence, threshold and cost J (for example, geometric or ground-truth labels supplied by the evaluator, never generated from COMPASS’s own accumulator). Each oracle opportunity fixes, before the runs, its onset, confirmation time, expiry, target class (the available alternative), decision eligibility, and a response deadline. **Warranted-switch recall** is the fraction of eligible opportunities in which a discretionary switch to the target class occurs by the deadline and is held for the hold time fixed in advance. **Response delay** is measured from the oracle onset, not from the onset of the algorithm’s own sustained advantage, to that switch; a missing response is right-censored at the deadline, and delays are summarized with censoring (e.g., Kaplan–Meier), never by averaging only the successful responses. **Lockup** is an eligible opportunity whose warranted target and a safe alternative both persist until the deadline without a response; the lockup rate is lockups per eligible opportunity. Opportunities excluded because of clip lockout, challenger retargeting, safety interruption, an unsafe or unavailable alternative, or an invalid log are reported as counts rather than silently dropped. Validation of the conditional response theorem (whether the hypotheses of Proposition 3 held and whether its N_{resp} bound was met) is reported separately from this application-level recall. The independent oracle, integrated robot logging, closed-loop runs and physical freezing trials are external gates that this paper has not met; the offline scorer `scripts/evaluate_opportunities.py` implements only the deadline, hold and censoring contract on scripted traces, with oracle labels supplied separately, and no figures are reported before measurement.

End-to-end pipeline latency. To complement the decision-core latency measurement of §5.4, we will measure, on the real ROS 2 stack, the end-to-end latency from subscription-callback receipt to velocity-command output (including TF transforms, costmap access, `controller_server` dispatch, and DDS queueing/executor jitter) and report it as a distribution (p50, p99, max).

Scenarios. 4 encounter types $\times$ corridor width (narrow/wide) — head-on confrontation, robot overtaking a person, person overtaking the robot (where the correct behavior for the robot is to hold its lane), and crossing. Additional diagnostic scenarios — symmetric ambiguous configuration

(left/right cost tie, targeting P1), sensor noise/gap flicker (targeting anti-oscillation), narrowing corridor (targeting yield/stop via availability pruning), **a challenger-tie configuration (targeting the tie-break rule)**, **an F-formation group encounter (confirming the group is not split)**, and **vulnerable-pedestrian proximity (confirming conservative passing)**.

External baselines. The minimum like-for-like baseline is a previous-class consistency weight in the style of de Groot et al. [25] and SHINE [31], applied to exactly the same candidates and cost streams as COMPASS, both in the offline harness and in closed loop; it tests whether evidence accumulation does more than an ordinary previous-class bias. Further decision-rule baselines are an opinion-dynamics passing-side rule [32] and a dwell-plus-relative-improvement selector of the kind used in concurrent work [36]. Planner-level baselines are DWB (Nav2’s default local planner, a memoryless oscillation baseline), TEB (multi-homotopy + switching cost), MPPI, a social-force-based planner, and ORCA/RVO for congestion. (The internal ablation baselines have already been measured in §5.1.)

Independent tuning protocol for external baselines. To avoid the “weakened baseline” criticism, each external baseline is tuned by the following procedure. (i) Tuning is performed by a party **independent** of the authors of the proposed method (or by an automated tuning script fixed in advance). (ii) Each method is optimized under the **same scenario set and the same evaluation-metric weighting** (e.g., success rate prioritized, social distance as tiebreaker), with the same tuning budget (number/time of parameter searches). (iii) The scenarios used for tuning and the scenarios used for evaluation are **separated** (tuning-set / test-set split). (iv) The final parameter values used and the search ranges are fully disclosed in the appendix. **(v) The proposed method itself is also subject to the same tuning protocol (same tuning budget, same tuning/test split, independent party) — that is, the proposed method is not separately hand-tuned, and every method under comparison undergoes the same procedure symmetrically.** The comparison results produced by this protocol are reported after measurement; this section fixes only the procedure.

Legibility user-study protocol. To validate the observer-model proxy of §4.7 with human data, a perceptual experiment is designed as follows (results reported after measurement).

- **Stimuli.** Videos of the same encounter scenario driven by the proposed method vs. a comparison method (especially a memoryless baseline) are presented, truncated at time points **before** the passing side becomes apparent.
- **Task.** Participants are asked, at each truncation point, “which side do you think the robot will pass you on,” and both the **accuracy of the response and the time to respond (human time-to-legible)** are recorded.
- **Hypothesis.** A committing policy allows participants to predict the passing side (i) earlier and (ii) more accurately than a memoryless policy.
- **Analysis.** We report the correlation between the Bayesian observer proxy t_{legible} of §4.7 and human response times, quantifying the validity of the proxy metric. **Samples for which t_{legible} is undefined** (cases where the posterior never stably exceeds p^* by the end of the video, so the passing side is never legible, occurring particularly for oscillatory policies) are treated not as missing but as **right-censored** data. That is, such a sample’s t_{legible} is treated as censored at the video length T_{clip} and aggregated within a survival-analysis framework (e.g., Kaplan-Meier estimation, log-rank test), rather than being excluded from a simple average or replaced with an arbitrarily large value.
- **Ecological-validity limitation.** While the video-truncation stimulus approach is reasonable for control and reproducibility, legibility judgments from **third-person observation** through a screen may differ from judgments in an actual **first-person encounter** with the robot — an

ecological-validity limitation. Accordingly, the results of this protocol are reported as primary evidence, while validation with real pedestrians in first-person encounters must be filled in by a separate, currently unmeasured experiment.

- **Ethics and sample.** The number of participants N , recruitment and consent procedures, repeated-measures design, and nonparametric tests are to be fixed before data collection.

All measured values from the user study (accuracy, timing, correlation, p-values) are reported only after measurement; this item fixes only the operational definitions and procedures.

6 Conclusion and Limitations

This paper proposes a decision-layer planner for social navigation that treats the temporal consistency of passing decisions as a first-class objective, combining an ID-indexed, cross-cycle-correspondent representation of **class** (a design contract that the current implementation only partly realizes) with a commitment switching rule based on leaky evidence accumulation — a rectified, leaky variant of Page’s one-sided CUSUM statistic [39] with a progress-dependent threshold — and a lexicographic safety override of the standard priority-arbitration kind. We state five properties (P1–P5): P1 and P2 follow from standard CUSUM/queueing and dwell-time arguments, P3 and P5 are branch-priority and guard contracts, and P4 is a progress-rate and accumulator-containment argument; none is new mathematics. The anti-oscillation guarantee we claim is the deterministic, pathwise inter-switch bound P2 — at least $N_{\min} = \lceil E_{\text{th}}(\rho) / ((D_{\max} - \Delta_{\text{floor}}) dt) \rceil$ cycles between discretionary switches for fixed dt (for variable measured intervals, as in the Nav2 adapter, only the accumulated-time form is claimed; Remark 9), zero post-switch evidence, and a range bound on the challenger advantage, informative under the declared condition $E_0 > (D_{\max} - \Delta_{\text{floor}}) dt$ that the default knobs satisfy — paired with the conditional response-time bound of Proposition 3: its deadline requires the same eligible challenger to remain selected, uninterrupted updates without reset or HOLD, a sustained advantage lower bound, and sufficient clip/leak-equilibrium headroom. P1 states the sharper probabilistic form — a per-cycle switching probability and per-unit-time switching rate exponentially small in $\theta^* E_0$, obtained by dominating the rule with the Lindley (CUSUM) recursion and applying Kingman’s bound, with θ^* the exact Lundberg root of the increment law (the closed form $\theta^* \approx 2\Delta_{\text{floor}} / (\sigma_D^2 dt)$ is tuning guidance only, and the per-unit-time bound carries a factor of $1/dt$) — as a refinement conditional on an i.i.d. hypothesis on the challenger advantage, since bare stationarity with zero mean and bounded variance admits a counterexample that defeats the exponential form. We also prove P4 on top of the dynamics of progress ρ , a lower bound on lateral progress rate, and a **containment condition on the challenger accumulator** $e^{\text{rev}}(\bar{\rho})$. In particular, the switching dynamics close over the **single-challenger accumulator** of §4.3/§4.5, and the two-sided condition on its reachable upper bound $E_0 < e_{\max}^{\text{rev}} < E_0(1+k_\rho)$ — the lower bound providing algebraic reachability headroom at $\rho = 0$ and the upper bound being P4 containment — replaces any above-threshold headroom requirement $e_{\max} > E_0(1+k_\rho)$, which would contradict P4 containment; the reachability-headroom condition is necessary for any discretionary switch from zero evidence but is not by itself a liveness guarantee, since actual response also requires the persistent-selection, uninterrupted-update and advantage hypotheses of Proposition 3, and the clip $e_{\max}$ can separately lock out switching at high progress. On the empirical side, using an offline harness that drives the actual decision core, we measured anti-oscillation behavior (about 98 oscillations per encounter in the ambiguous-tie scenario for the immediate-argmin comparator, vs. 0 for the proposed method and also 0 for the 0.6 s simple dwell, so that scenario separates filtering from no filtering; the accumulator and the dwell differ in the transient-spike, mid-reversal and intermittent scenarios), a decision-stream observer statistic (t_{sfx} and its right-censoring rate; not a validated legibility measure), and real-time performance ($K = 3$ p99 58.6 μs , max 651.3 μs ; the

max is about 1.30% of the 20 Hz budget) (§5.3, §5.4), and also obtained, by measurement, an offline transition-blocking sensitivity interval for progress hardening ($v_{\text{lat}} \in (0.20, 0.35)$ m/s); this is not a physical freezing threshold. The comparison that would test whether evidence accumulation improves on existing mechanisms — previous-class consistency weights [25, 31], opinion-dynamics passing [32] and, in concurrent work, dwell-plus-relative-improvement selection [36] — and closed-loop evaluation remain planned (§5.6).

Limitations. (i) The planar (2D) assumption means multi-level or sloped environments are not handled. (ii) Constant-velocity Kalman prediction is strong in the short term but has limits under abrupt intent changes or multi-modal crowds (a learning-based predictor can be substituted as an interchangeable input, Section 2). (iii) Front/rear passing is handled only as cost and is not separated into distinct **classes**. (iv) The empirical scope of this paper is limited to the decision layer. Behavioral consistency, the decision-stream observer statistic, and per-cycle latency were **measured** with an offline harness driving the actual decision core (§5.3, §5.4), but performance metrics requiring physical simulation (success rate, collision, minimum social distance), the external baselines, and the user study have not yet been measured in this evidence set; their protocols have been fixed in advance in the Planned Evaluation (§5.6), with per-case values still to be bound before any run. Meanwhile, the ablations showed that the leaky accumulator, rather than the margin or progress hardening, is the primary oscillation-suppression mechanism (removing $-$ hysteresis or $-$ hardening alone produced no regression in this regime), and revealed an offline transition-blocking interval for the scripted ρ drive rate ($v_{\text{lat}} \in (0.20, 0.35)$ m/s), not a physical freezing threshold. (v) **No consistency-weight, opinion-dynamics or closed-loop comparison.** The comparators are internal (immediate argmin, simple dwell, knob ablations and a synthetic correspondence-loss stress comparator). The most direct missing baseline is a previous-class consistency weight [25, 31] applied to exactly the same candidates and cost streams; opinion-dynamics passing [32] and dwell-plus-relative-improvement selection [36] are further baselines. None of these was run and no closed-loop simulation was performed, so the offline results show only that the implemented rule filters scripted, noisy decision-label streams; whether it improves on these mechanisms, or on navigation outcomes, is untested. These comparisons are part of the planned evaluation (§5.6). (vi) **Strength of the guarantees.** At the default knobs the worst-case separation guaranteed by P2 is short: 3 cycles (0.15 s; Remark 10), fewer than the 12 cycles (0.6 s) enforced by a fixed dwell timer such as the simple-dwell comparator of §5.1; P1 relies on an i.i.d. hypothesis that temporally correlated social costs need not satisfy (Remark 6), and a policy that never switches satisfies P2; the guarantees are contracts about the decision rule, not evidence of legible or effective navigation. P1 and P2 apply standard CUSUM/queueing and dwell-time arguments, P3 and P5 are branch-priority and guard contracts, and P4 is a progress-rate and accumulator-containment argument (Section 2, §4.6); none is new mathematics, and their value lies in stating, for this rule, the assumptions under which each holds. The current contribution is therefore the conditional decision-rule design and formal properties together with **offline empirical validation of decision-layer consistency**; physical performance, external comparison, and human-data validation are to be filled in subsequently according to the protocol of §5.6.

Generalization limits (P4, actuation, sensing). P4’s guarantee of maneuver completion depends on $v_{\text{lat},\min} > 0$ in Assumption 3(d), which presupposes the following. (i) **Actuation type.** For nonholonomic drives (differential, Ackermann), cross-track progress is realized only as the product of forward speed and steering, so $v_{\text{lat},\min} > 0$ requires **positive forward speed and forward clearance**. That is, if the robot stops or the front is blocked, the lateral progress rate becomes 0, breaking P4’s premise, and the safety layer (P3, P5) takes over. For holonomic (omnidirectional) drives, direct lateral motion is possible even while stationary, relaxing this premise. (ii) **Footprint.** The corridor-width and pruning analysis in this paper assumes a circular footprint approximation; a rectangular footprint (an elongated body) has an occupied area that varies with orientation during rotation, which can make corridor-availability determination and the realization of $v_{\text{lat},\min}$ more conservative. (iii)

Dependence on forward speed. As noted in (i), $v_{\text{lat},\text{min}} > 0$ depends on forward speed, so in congested environments with frequent low-speed or stopped intervals, the upper bound K on maneuver-completion time increases. (iv) **Sensor modality.** This design receives person tracking, F-formation, and vulnerable-pedestrian attributes from external modules; 2D-laser-based tracking has weak heading and attribute estimation, whereas depth/RGB-D-based tracking is richer. The quality of $\sigma_{\text{front}}/\sigma_{\text{rear}}$ regime determination and of group/attribute recognition therefore depends on sensor modality, and the guarantees of this paper’s decision layer hold on the premise that these inputs are of adequate quality.

Ethical limitations. The vulnerable-pedestrian handling of §4.8 relies on external attribute classification, which carries risks of bias, privacy, and stigma. This paper specifies only a policy of choosing conservative defaults under uncertainty and does not claim the fairness of the classifier itself as a contribution, and it explicitly notes that a separate ethics and privacy review is needed for real deployment.

Future work. Carrying out the Planned Evaluation (§5.6) — physical-simulation performance metrics, independently tuned comparison against the external baselines, and validating time-to-legible against human data via the user study — is the top priority; beyond that, we propose extending front/rear passing into explicit `classes` via spatiotemporal (x, y, t) homotopy, and combining the approach with learning-based prediction.

Acknowledgments

We thank OmniLink for an external rerun that exposed the standard-library dependence of the offline harness. AI tools assisted with translation from the Korean manuscript and with editing; the author verified all technical content and takes full responsibility. An open-source implementation of COMPASS (the decision core, the Nav2 controller plugin, the Gazebo testbed, and the `compass_eval` offline evaluation harness) is available at <https://github.com/kjungmo/compass>.

References

- [1] D. Fox, W. Burgard, S. Thrun. The Dynamic Window Approach to Collision Avoidance. *IEEE Robotics & Automation Magazine*, 4(1), pp. 23–33, 1997.
- [2] C. Rösmann, F. Hoffmann, T. Bertram. Integrated online trajectory planning and optimization in distinctive topologies. *Robotics and Autonomous Systems*, 88, pp. 142–153, 2017.
- [3] G. Williams, N. Wagener, B. Goldfain, P. Drews, J. M. Rehg, B. Boots, E. A. Theodorou. Information Theoretic MPC for Model-Based Reinforcement Learning. In *Proc. IEEE Int. Conf. on Robotics and Automation (ICRA)*, pp. 1714–1721, 2017.
- [4] D. Helbing, P. Molnár. Social Force Model for Pedestrian Dynamics. *Physical Review E*, 51, pp. 4282–4286, 1995.
- [5] J. van den Berg, S. J. Guy, M. Lin, D. Manocha. Reciprocal n-Body Collision Avoidance. In *Robotics Research: The 14th International Symposium (ISRR)*, *Springer Tracts in Advanced Robotics*, vol. 70, pp. 3–19, 2011.
- [6] E. T. Hall. *The Hidden Dimension*. Doubleday, 1966.
- [7] R. Kirby. Social Robot Navigation. PhD thesis, CMU-RI-TR-10-13, Carnegie Mellon University, 2010.

- [8] S. Bhattacharya, M. Likhachev, V. Kumar. Topological constraints in search-based robot path planning. *Autonomous Robots*, 33(3), pp. 273–290, 2012.
- [9] A. D. Dragan, K. C. T. Lee, S. S. Srinivasa. Legibility and Predictability of Robot Motion. In *Proc. ACM/IEEE Int. Conf. on Human-Robot Interaction (HRI)*, pp. 301–308, 2013.
- [10] P. Trautman, A. Krause. Unfreezing the Robot: Navigation in Dense, Interacting Crowds. In *Proc. IEEE/RSJ Int. Conf. on Intelligent Robots and Systems (IROS)*, pp. 797–803, 2010.
- [11] S. Macenski, F. Martín, R. White, J. Ginés Clavero. The Marathon 2: A Navigation System (Nav2 / ROS2 Navigation). In *Proc. IEEE/RSJ Int. Conf. on Intelligent Robots and Systems (IROS)*, pp. 2718–2725, 2020.
- [12] C. Mavrogiannis, P. Alves-Oliveira, W. Thomason, R. A. Knepper. Social Momentum: Design and Evaluation of a Framework for Socially Competent Robot Navigation. *ACM Transactions on Human-Robot Interaction (THRI)*, 11(2), Article 14, 2022.
- [13] C. Mavrogiannis, F. Baldini, A. Wang, D. Zhao, P. Trautman, A. Steinfeld, J. Oh. Core Challenges of Social Robot Navigation: A Survey. *ACM Transactions on Human-Robot Interaction (THRI)*, 12(3), Article 36, 2023.
- [14] Y. Gao, C.-M. Huang. Evaluation of Socially-Aware Robot Navigation. *Frontiers in Robotics and AI*, 8, Article 721317, 2022.
- [15] A. Francis, C. Pérez-D’Arpino, C. Li, F. Xia, A. Alahi, R. Alami, et al. Principles and Guidelines for Evaluating Social Robot Navigation Algorithms. *ACM Transactions on Human-Robot Interaction (THRI)*, 14(2), Article 34, 2025. Also *arXiv preprint arXiv:2306.16740*.
- [16] A. Alahi, K. Goel, V. Ramanathan, A. Robicquet, L. Fei-Fei, S. Savarese. Social LSTM: Human Trajectory Prediction in Crowded Spaces. In *Proc. IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*, pp. 961–971, 2016.
- [17] A. Gupta, J. Johnson, L. Fei-Fei, S. Savarese, A. Alahi. Social GAN: Socially Acceptable Trajectories with Generative Adversarial Networks. In *Proc. IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*, pp. 2255–2264, 2018.
- [18] T. Salzmann, B. Ivanovic, P. Chakravarty, M. Pavone. Trajectron++: Dynamically-Feasible Trajectory Forecasting with Heterogeneous Data. In *Proc. European Conf. on Computer Vision (ECCV), Part XVIII, LNCS vol. 12363*, pp. 683–700, 2020.
- [19] A. Kendon. *Conducting Interaction: Patterns of Behavior in Focused Encounters*. Cambridge University Press, 1990.
- [20] J. Rios-Martinez, A. Spalanzani, C. Laugier. From Proxemics Theory to Socially-Aware Navigation: A Survey. *International Journal of Social Robotics*, 7, pp. 137–153, 2015.
- [21] P. Trautman, J. Ma, R. M. Murray, A. Krause. Robot navigation in dense human crowds: Statistical models and experimental studies of human–robot cooperation. *International Journal of Robotics Research (IJRR)*, 34(3), pp. 335–356, 2015.
- [22] F. Setti, C. Russell, C. Bassetti, M. Cristani. F-formation detection: Individuating free-standing conversational groups in images. *PLoS ONE*, 10(5), e0123783, 2015.

- [23] M. Moussaïd, D. Helbing, S. Garnier, A. Johansson, M. Combe, G. Theraulaz. Experimental study of the behavioural mechanisms underlying self-organization in human crowds. *Proceedings of the Royal Society B*, 276, pp. 2755–2762, 2009.
- [24] C. Mavrogiannis, K. Balasubramanian, S. Poddar, A. Gandra, S. S. Srinivasa. Winding Through: Crowd Navigation via Topological Invariance. *IEEE Robotics and Automation Letters (RA-L)*, 8(1), pp. 121–128, 2023. Also *arXiv preprint arXiv:2109.05084*.
- [25] O. de Groot, L. Ferranti, D. M. Gavrila, J. Alonso-Mora. Topology-Driven Parallel Trajectory Optimization in Dynamic Environments. *IEEE Transactions on Robotics (T-RO)*, 41, pp. 110–126, 2025. Also *arXiv preprint arXiv:2401.06021*.
- [26] M. Kuderer, H. Kretzschmar, C. Sprunk, W. Burgard. Feature-Based Prediction of Trajectories for Socially Compliant Navigation. In *Robotics: Science and Systems (RSS)*, 2012.
- [27] H. Kretzschmar, M. Spies, C. Sprunk, W. Burgard. Socially Compliant Mobile Robot Navigation via Inverse Reinforcement Learning. *International Journal of Robotics Research (IJRR)*, 35(11), pp. 1289–1307, 2016.
- [28] C. Cao, P. Trautman, S. Iba. Dynamic Channel: A Planning Framework for Crowd Navigation. In *Proc. IEEE Int. Conf. on Robotics and Automation (ICRA)*, pp. 5551–5557, 2019.
- [29] D. V. Lindley. The theory of queues with a single server. *Mathematical Proceedings of the Cambridge Philosophical Society*, 48(2), pp. 277–289, 1952.
- [30] J. F. C. Kingman. Inequalities in the theory of queues. *Journal of the Royal Statistical Society, Series B*, 32(1), pp. 102–110, 1970.
- [31] D. Martinez-Baselga, O. de Groot, L. Knoedler, L. Riazuelo, J. Alonso-Mora, L. Montano. SHINE: Social Homology Identification for Navigation in Crowded Environments. *International Journal of Robotics Research*, 45(1), pp. 60–79, 2026. Published online 2025. Also *arXiv preprint arXiv:2404.16705*.
- [32] C. Cathcart, M. Santos, S. Park, N. E. Leonard. Proactive Opinion-Driven Robot Navigation Around Human Movers. In *Proc. IEEE/RSJ Int. Conf. on Intelligent Robots and Systems (IROS)*, pp. 4052–4058, 2023. Also *arXiv preprint arXiv:2210.01642*.
- [33] X. Chen, S. Liu. Social-DSM: Design and Evaluation of Socially Aware Navigation Control Through Extended Dynamical System Modulation. SSRN preprint, doi:10.2139/ssrn.5251861, posted 12 May 2025.
- [34] G. d’Addato, P. Falqueto, L. Palopoli, D. Fontanelli. Socially-Aware Opinion-Based Navigation with Oval Limit Cycles. *arXiv preprint arXiv:2411.04678*, 2024.
- [35] T. Zhou, S. Qi, G. Cen, Z. Zha, E. Lyu, J. Wang, M. Q.-H. Meng. Minimally-intrusive Navigation in Dense Crowds with Integrated Macro and Micro-level Dynamics. *arXiv preprint arXiv:2312.17076*, 2023.
- [36] S. Li, Z. Wang, J. Cao, J. Yang, K. Wu. BIG-CBF: Behavior-Imagination-Guided Control Barrier Function with Shared Uncertainty for Mobile Robot Navigation. *arXiv preprint arXiv:2609.14343*, 2026. Submitted 13 September 2026; concurrent work.
- [37] T. Nakao, K. Kasaura, T. Kozuno. Symmetry-Breaking in Multi-Agent Navigation: Winding Number-Aware MPC with a Learned Topological Strategy. *arXiv preprint arXiv:2511.15239*, 2025.

- [38] C. I. Mavrogiannis, R. A. Knepper. Multi-agent path topology in support of socially competent navigation planning. *International Journal of Robotics Research*, 38(2–3), pp. 338–356, 2019.
- [39] E. S. Page. Continuous Inspection Schemes. *Biometrika*, 41(1–2), pp. 100–115, 1954.
- [40] M. Usher, J. L. McClelland. The time course of perceptual choice: The leaky, competing accumulator model. *Psychological Review*, 108(3), pp. 550–592, 2001.
- [41] J. P. Hespanha, D. Liberzon, A. S. Morse. Hysteresis-based switching algorithms for supervisory control of uncertain systems. *Automatica*, 39(2), pp. 263–272, 2003.
- [42] J. P. Hespanha, A. S. Morse. Stability of switched systems with average dwell-time. In *Proc. 38th IEEE Conf. on Decision and Control (CDC)*, vol. 3, pp. 2655–2660, 1999.
- [43] P. F. Orzechowski, C. Burger, M. Lauer. Decision-Making for Automated Vehicles Using a Hierarchical Behavior-Based Arbitration Scheme. In *Proc. IEEE Intelligent Vehicles Symposium (IV)*, pp. 767–774, 2020. Also *arXiv preprint arXiv:2003.01149*.
- [44] P. Spieker, N. Le Large, M. Lauer. Better Safe Than Sorry: Enhancing Arbitration Graphs for Safe and Robust Autonomous Decision-Making. In *2025 IEEE International Conference on Systems, Man, and Cybernetics (SMC)*, pp. 3921–3927, 2025. doi:10.1109/SMC58881.2025.11343055. Also *arXiv preprint arXiv:2411.10170*.

A Reproducibility

Software and evidence versions. The integration targets ROS 2 Jazzy; planned physical simulation targets Gazebo Harmonic. ROS build/test evidence is distinct from experiment provenance: R3 is the archived AMD Ryzen 5 5500GT decision-core latency measurement, not a new integrated-controller or ROS-pipeline timing result. Current R1 observer outputs were regenerated on AMD EPYC 9V74. The canonical PDF source is `paper/arxiv/main.tex`; `scripts/build_paper.sh` uses pdfLaTeX from TeX Live (including science/extra packages), Poppler and ripgrep. Its `--check` mode builds in a temporary directory, and `--write` deliberately regenerates the PDF and artifact-hash manifest; visual QA is still required. A rerun must record its actual compiler, standard library, TeX/package versions, hardware, flags and commands rather than infer them from the ROS distribution alone.

Build and run commands. Run from the repository root. The full package build below requires a sourced ROS 2 Jazzy environment and the declared Nav2/simulator dependencies; an evaluator-only build can instead use `--base-paths src --packages-up-to compass_eval`. These commands preserve the archived measurements.

```
# Full workspace, including the simulator package (not a simulator run)
colcon build --base-paths src sim --cmake-args -DBUILD_TESTING=ON
source install/setup.bash
colcon test --packages-select compass_core compass_nav2 compass_eval
colcon test-result --verbose

# Separate rerun CSV; summaries are printed to stdout
mkdir -p /tmp/compass_eval_results
./build/compass_eval/compass_eval ablation /tmp/compass_eval_results
./build/compass_eval/compass_eval latency
./build/compass_eval/compass_eval rho_sweep
```

```
# Canonical manuscript build, without replacing tracked artifacts
bash scripts/build_paper.sh --check
```

Selected legacy/shared defaults. Table 4 summarizes the manuscript’s default decision knobs and shared controller settings from `src/compass_nav2/config/compass_params.yaml`; it is not an exhaustive parameter inventory, a 1:1 list of `compass::Knobs`, or a deployment-validation claim. The retained compatibility knob `e_max_fwd` does not determine discretionary switching and is omitted. Current controller parameters are read at configuration time in `src/compass_nav2/src/compass_controller.cpp`; complete example wiring is in `sim/config/nav2_compass.yaml`.

The configure-time research defaults are:

- `use_measured_progress=false`;
- `use_candidate_trajectories=false`;
- `progress_max_gap=0.25 s`;
- `progress_max_speed=2.0 m/s`;
- in measured mode, L_{plan} is the anchored planned offset described in §4.5 (no configuration knob); legacy mode keeps $L_{\text{plan}} = 1.0 \text{ m}$.

The research profile in `src/compass_core/include/compass_core/response_profile.hpp` sets $k_p = 0.5$; it does not enable either adapter flag automatically. Their separate contracts are documented in `RESPONSIVENESS.md` and `docs/CANDIDATE_TRAJECTORIES.md`.

Table 4: Selected legacy/shared default values; research options and parameter sources are specified in the accompanying text.

Knob	Value	Meaning
<code>delta_floor</code>	0.05	Instantaneous switching margin Δ_{floor} (dimensionless)
<code>E0</code>	0.30	Baseline threshold $E_{\text{th}}(0)$ (normalized-cost seconds)
<code>k_rho</code>	1.0	Progress-hardening coefficient k_p
<code>p</code>	2	Progress-hardening exponent
<code>lambda</code>	0.97	Leak coefficient λ per update ($\tau_{\text{leak}} \approx 1.64 \text{ s}$ at $dt = 0.05 \text{ s}$)
<code>e_max_rev</code>	0.50	Evidence clip e_{max} (normalized-cost seconds)
<code>d_safe</code>	0.5	Hard safety distance (m)
<code>ttc_min</code>	2.0	Minimum TTC (s)
<code>W</code>	3.0	Thrash window length (s)
<code>n_thrash</code>	4	Thrash threshold (count)
<code>w_g/w_s/w_e/w_r</code>	1.0/1.0/0.3/0.5	Cost-term weights
<code>sigma_front/sigma_rear/sigma_s</code>	1.2/0.6/0.5	Proxemics widths (m)
<code>K_cap</code>	3	Explicit-dimension cap
<code>a_brake</code>	0.5	Acceleration bound (m/s^2); speed decrement $a_{\text{brake}} dt$
<code>ttc_stop</code>	0.8	Stop-trigger TTC threshold (s)
<code>T_safe_dwell</code>	0.6	Safety-dwell protection time (s)
<code>eps_in/eps_out</code>	0.02/0.06	Tie entry/exit hysteresis $\varepsilon_{\text{in}}/\varepsilon_{\text{out}}$
<code>controller_frequency</code>	20.0	<code>controller_server</code> cycle rate (Hz)
<code>max_linear_speed</code>	0.5	Linear-speed hard cap (m/s)
<code>cruise_speed</code>	0.45	Default cruise speed (m/s)
<code>max_angular_speed</code>	1.0	Yaw-rate cap (rad/s)
<code>goal_decel_dist</code>	0.6	Deceleration-start distance near goal (m)
<code>lookahead_dist</code>	1.0	Local-goal lookahead distance (m)
<code>k_e/k_theta/k_side</code>	3.0/3.0/0.4	Path-tracking cross-track error, heading, lateral-bias gains

Scenario and seed specification. The offline measurements of §5 are run over 5 scenarios (`near_tie`, `transient_spike`, `mid_reversal`, `clean_commit`, `intermittent`) $\times$ 50 seeds $\times$ 6 variants, with $dt = 0.05$ s (20 Hz) and a horizon of 10 s (200 cycles). Scenario scripts, variant definitions, and the observer implementation are in `src/compass_eval`.

Source and result provenance. This manuscript accompanies the reviewed integration candidate in <https://github.com/kjungmo/compass>; it does not assert that the candidate is already merged into `main`. Record the exact checked-out commit and source/configuration/input hashes for every rerun. The original results remain recoverable at `9fe495a`; the intermediate log-odds-only observer is identified by PR 12 commit `5343d457`; current R1 adds the separately declared, post-hoc 0.30 s follow-up rule. Raw CSVs of all three versions and the per-row comparison are kept in `src/compass_eval/results/observer_versions/`; the result-version record is `src/compass_eval/results/README`. Current behavioral values are in `ablation_raw.csv` and `R1_ablation.md`; `R3_latency.md` and `R5_rho_sweep.md` retain their distinct archived scope. Conceptual figures are generated from their scripts, not empirical raw trajectories. The labelled-cell `scripts/check_observer_results.py` and numeric `scripts/check_paper_number` verify their declared checks, not every scientific claim. `src/compass_eval/results/PROVENANCE.md` records the SHA-256, producing command and source revision of every committed result file, including the raw CSVs, and `scripts/check_repo_consistency.py` recomputes those hashes; `paper/arxiv/artifact_manifest` records source/PDF/figure hashes for the built manuscript snapshot; any submission tag is a separate future release action.