

SG-1 *Serial to Network Gateway*

SG-1 is a signal interface unit in order to deliver conventional serial navigational data to ship's network system. This makes it more easier to develop PC based Marine Solution such as RADAR, ECDIS, Multifunction Display, and etc. SG-1 meets SNGF (Serial to Network Gateway Function) of IEC 61162-450 maritime digital interface standard.




Serial to Network Gateway

- 9x isolated full-duplex RS-422/485 serial ports.
- 1x 10/100M Ethernet port.
- LED indicators for data transmission and reception on each serial port.
- 24V DC and 110/220V AC dual power supply.
- Fully compliant with IEC 61162-450 standard.
- Configurable SFIDs for each serial port.
- Configurable transmission groups for each sentence format on each serial listener.
- Sentence filtering.
- Ethernet-based configuration. All settings can be configured over Ethernet, including the IP address.
- Operating temperature range : -15 ~ +55 °C

SG-1 *Serial to Network Gateway*

Traditional IEC 61162-1/-2 Connections

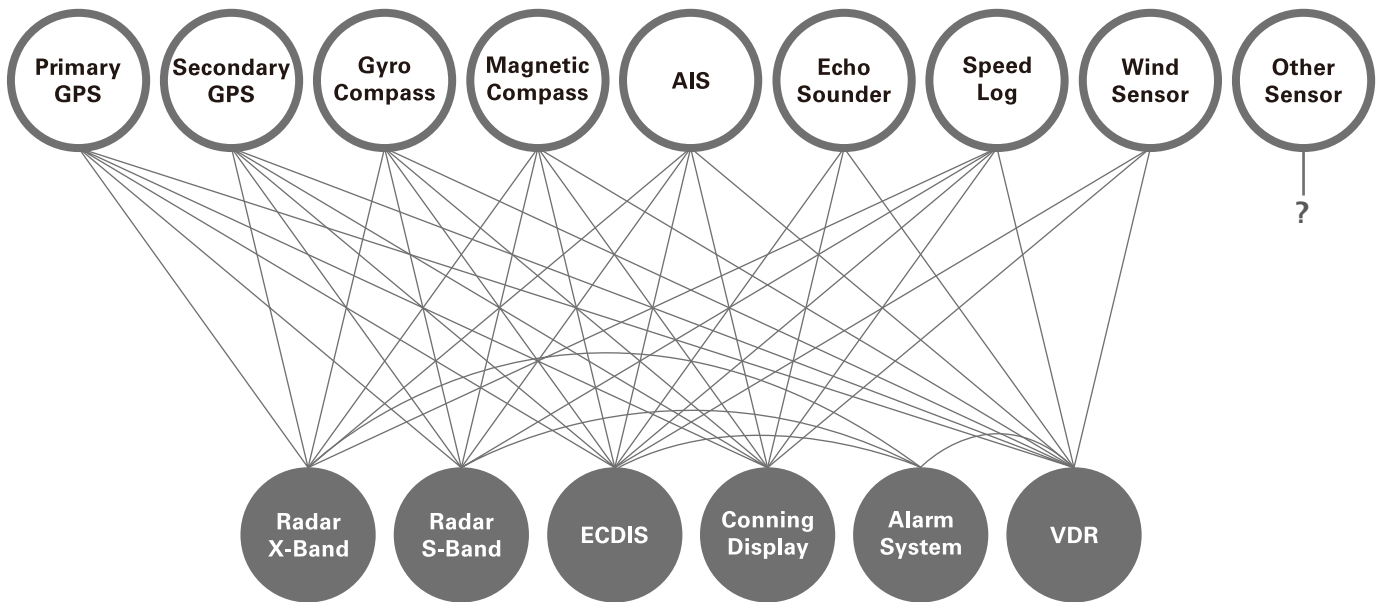

IEC 61162-450 Connections with SG-1

