


## INTERIOR FINISH SCHEDULE

SEE BWCO DRAWINGS  
FOR INTERIOR FINISHES

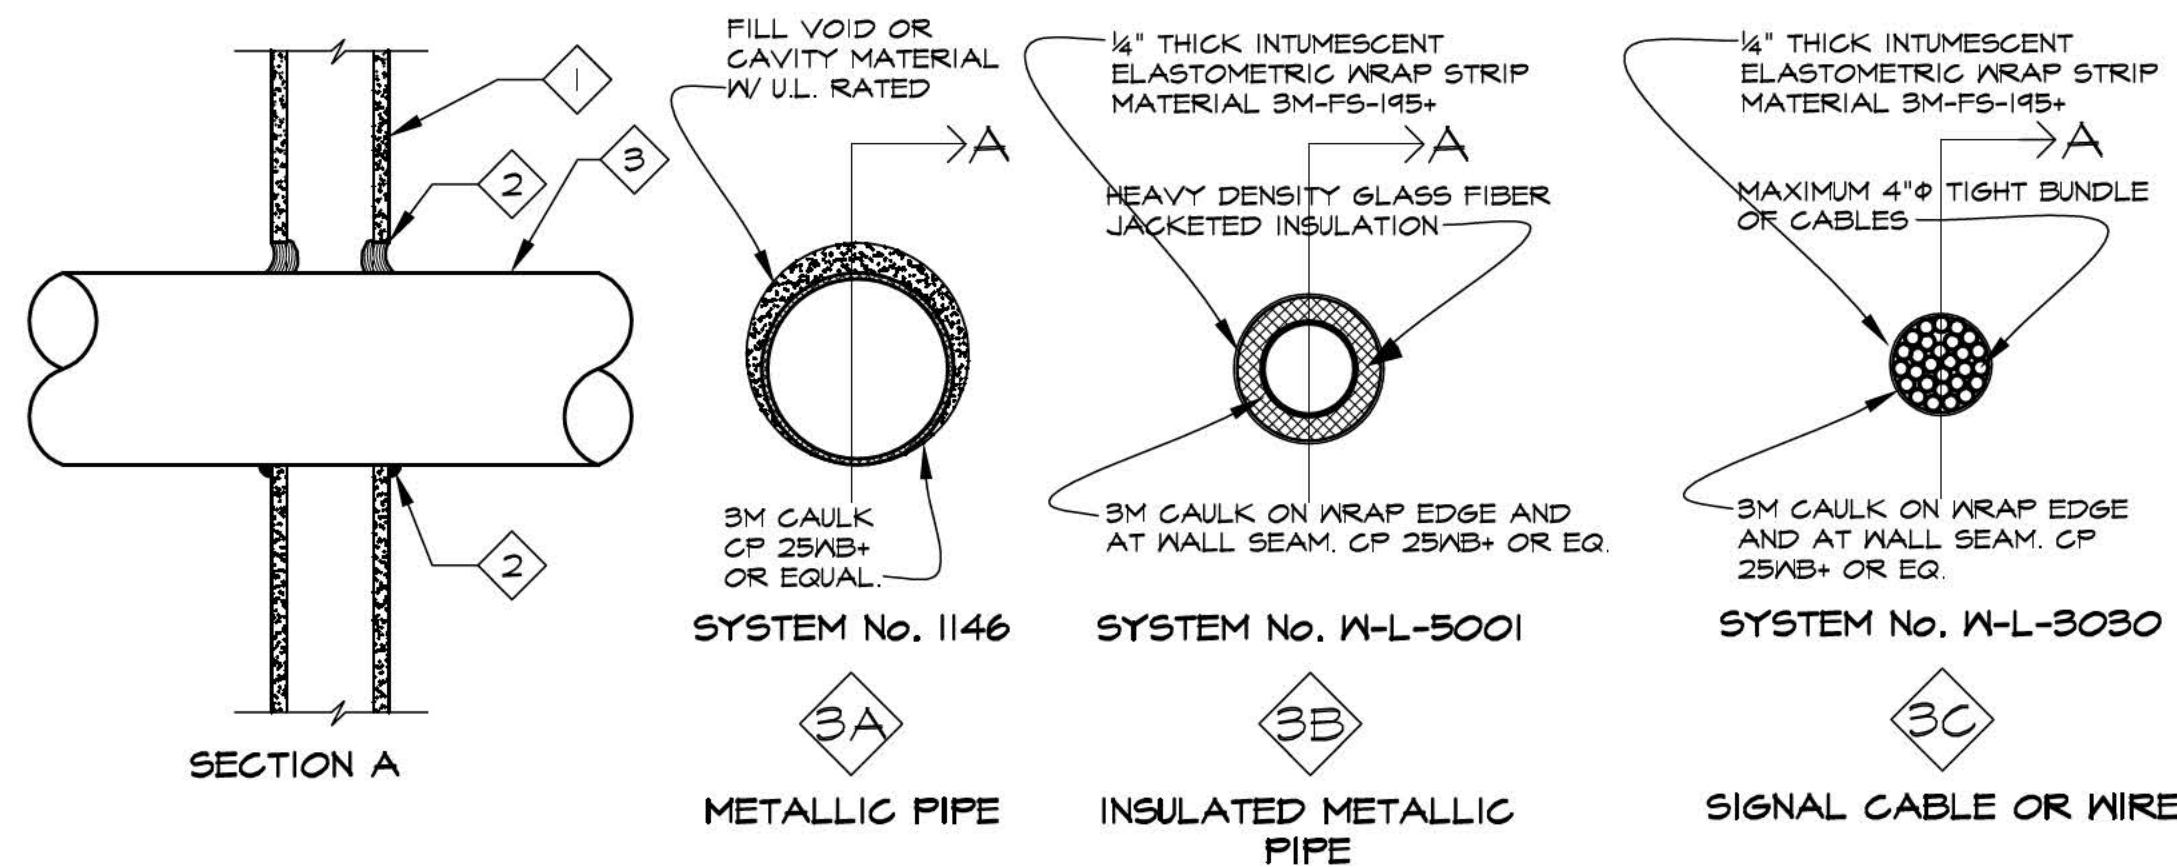

### TYPICAL DEMISING WALL PENETRANT RESTORATION DETAIL


SCALE: 1/2" = 1'-0"

#### DRAWING LEGEND NOTES

- 1 WALL ASSEMBLY
- 2 3/8" THICK MINIMUM CAULK 3M CP 25AB+ OR EQUAL
- 3 THROUGH WALL PENETRANT
- 3A METALLIC PIPE (SYSTEM W-L 1146)
1. STEEL PIPE 12" Ø (OR SMALLER) SCHED. 10 (OR HEAVIER)
2. IRON PIPE 12" Ø (OR SMALLER)
3. CONDUIT 6" Ø (OR SMALLER)

4. COPPER TUBING, 6" Ø (OR SMALLER) TYPE L (OR HEAVIER)
5. COPPER PIPE, 6" Ø (OR SMALLER) REGULAR (OR HEAVIER)
- 3B INSULATED METAL PIPE (SYSTEM W-L 5001)
1. STEEL PIPE 12" Ø (OR SMALLER) SCHED. 10 (OR HEAVIER)
2. COPPER TUBING 6" Ø (OR SMALLER) TYPE L (OR HEAVIER)
3. COPPER PIPE, 6" Ø (OR SMALLER) REGULAR (OR HEAVIER)
- 3C SIGNAL CABLE OR WIRE (SYSTEM W-L 5001)

NOTE:  
CONSULT INDIVIDUAL PENETRATION SYSTEM  
DESIGNS IN THE U.L. FIRE RESISTANCE  
DIRECTORY FOR ADDITIONAL INFO.

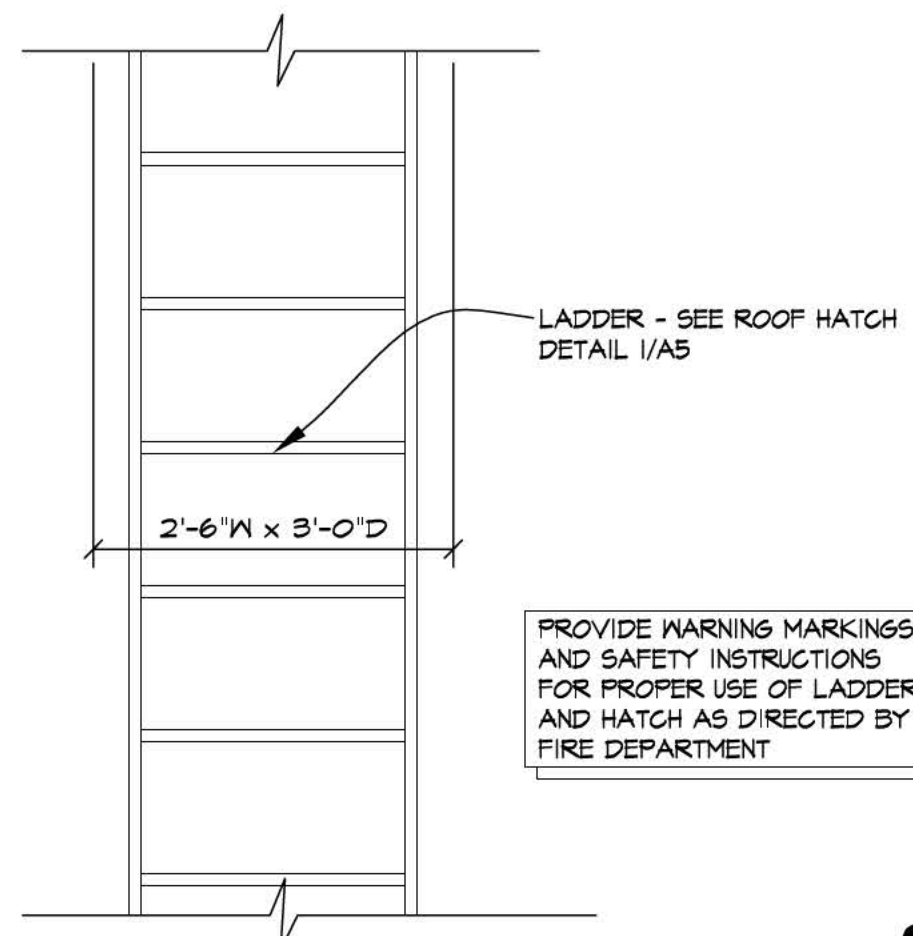


SCALE: 3/4" = 1'-0"

2

### LADDER & SCUTTLE DETAIL

SCALE: NONE

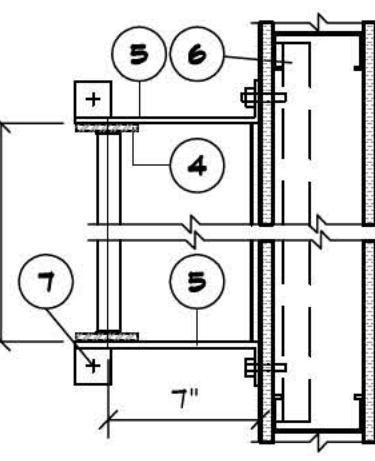

PLAN

1

## DOOR SCHEDULE

| MK                                   | DOOR   |      |                        |                    |               | DOOR<br>HARDWARE |       | FRAME                       |                    |                                     | DETAILS |             |      | FIRE<br>RATING | REMARKS<br>(REFER<br>NOTES) |
|--------------------------------------|--|------|------------------------|--------------------|---------------|------------------|-------|-----------------------------|--------------------|-------------------------------------|---------|-------------|------|----------------|-----------------------------|
|                                      | SIZE (W x H x D)   | TYPE | SWING                  | MATERIAL           | GLAZ.<br>TYPE | SET<br>#         | KEYED | TYPE                        | MATERIAL           | HEAD<br>HEIGHT                      | HEAD    | JAMB        | SILL |                |                             |
| 1                                    | 3'-0" X 7'-0" X 1-3/4"<br><small>(SHOWROOM ENTRY DOOR)</small>     | A    | REFER TO<br>FLOOR PLAN | ALUMINUM           |               | 1                | A     | 1                           | ALUMINUM           |                                     |         |             |      |                | 1, 2                        |
| 2                                    | 3'-0" X 7'-0" X 1-3/4"<br><small>(DELIVERY DOOR)</small>           | B    | REFER TO<br>FLOOR PLAN | INSULATED<br>METAL |               | 2                | A     | 2                           | INSULATED<br>METAL | 4"<br><small>(IF MANUOVERY)</small> |         | SEE<br>3/A1 |      |                | 1, 2, 3                     |
| 3                                    | 6'-0" X 8'-0"<br><small>(OVERHEAD DELIVERY DOOR)</small>           | D    | SECTIONAL<br>OVERHEAD  | INSULATED<br>METAL |               | 3                |       | MANUFACTURER'S<br>STANDARDS |                    |                                     |         | SEE<br>4/A1 |      |                | 1                           |
| SEE BWCO DRAWINGS FOR INTERIOR DOORS |  |      |                        |                    |               |                  |       |                             |                    |                                     |         |             |      |                |                             |
| 7                                    | 3'-0" X 7'-0" X 1-3/4"<br><small>(SHOWROOM EGRESS DOOR)</small>    | B    | REFER TO<br>FLOOR PLAN | INSULATED<br>METAL |               | 6                |       | 2                           | INSULATED<br>METAL | 4"<br><small>(IF MANUOVERY)</small> |         | SEE<br>3/A1 |      |                | 1, 3                        |
| 8                                    | 3'-0" X 7'-0" X 1-3/4"<br><small>(INTERIOR VESTIBULE DOOR)</small> | A    | REFER TO<br>FLOOR PLAN | ALUMINUM           |               | 7                |       | 1                           | ALUMINUM           |                                     |         |             |      |                | 1                           |

#### NOTES:

1. ALL DOORS SHALL BE SHOP PREPARED FOR HARDWARE.
2. ALL EXTERIOR DOORS TO BE KEYPED ALIKE. CONTRACTOR TO FIELD VERIFY AND MATCH CORE OF DOOR MARKED "2".
3. EXTERIOR DOOR, FRAME AND HARDWARE OWNER FURNISHED AND CONTRACTOR INSTALLED. VERIFY WITH G.C.
4. CONTRACTOR'S OPTION TO PURCHASE INTERIOR DOORS, FRAMES, AND HARDWARE THROUGH PREFERRED VENDOR. REFER TO SCOPE OF WORK SCHEDULE.

LOCKNET  
100 COURCHELLE DRIVE  
NICHOLASVILLE, KY 40358  
CONTACT: PAM PEEL  
PHONE 800-887-4307 EXT 133  
FAX 859-881-5499  
EMAIL: construction@locknet.com


SPECIAL NOTE:  
UNLESS OTHERWISE INDICATED, KNOCK  
DOWN (KD) TYPE DOOR FRAMES ARE NOT  
PERMITTED.

## GENERAL NOTES

- A N/A
- B N/A
- C REFER TO FLOOR PLAN, ELEVATIONS, AND  
SECTIONS FOR ADDITIONAL  
REQUIREMENTS.
- D REFER TO EXTERIOR SCHEDULES FOR  
COLORS. PERIMETER SEALANT COLOR TO  
MATCH FRAME COLOR UNLESS  
OTHERWISE INDICATED.

## FRAME TYPES

(SCALE 3" = 1'-0")

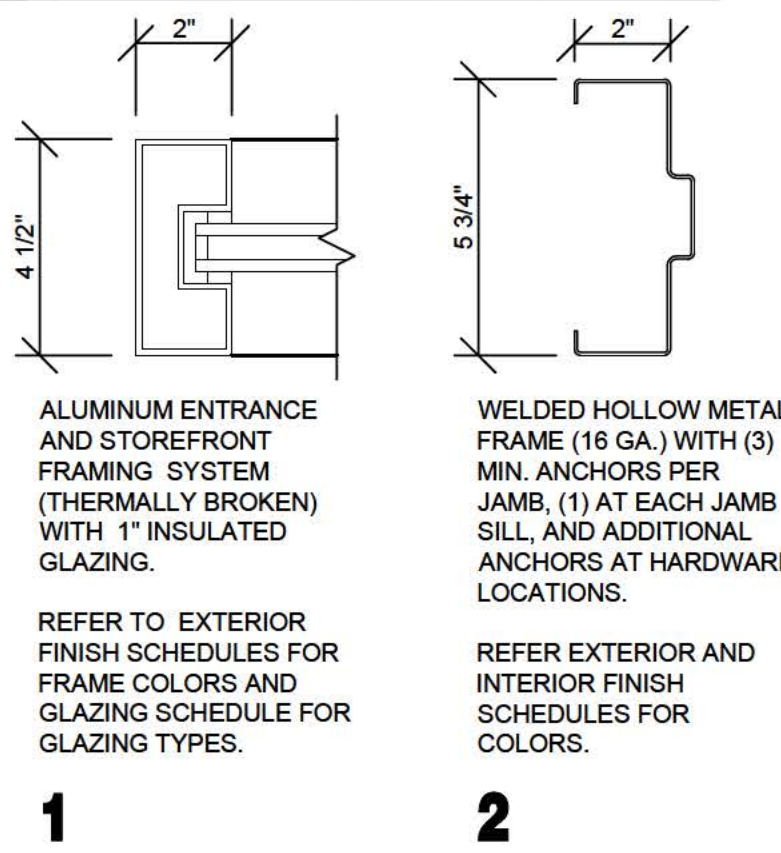


1

2



#### ROOFING SYSTEM SPECIFICATIONS:

1. BASE B/D - TYP. EPDM ROOF SYSTEM:  
FULLY-ADHERED MIN. 45 MIL BLACK EPDM ROOFING MEMBRANE OVER POLYISOCYANURATE INSULATION.
2. ALTERNATE B/D - TYP. TPO SINGLE PLY ROOFING SYSTEM: MIN. 45 MIL WHITE TPO THERMOPLASTIC POLYOLEFIN SINGLE-PLY ROOFING MEMBRANE (MEETING ASTM STANDARDS D3147, D2178, D312, D3904 FOR MATERIAL USED), OVER POLYISOCYANURATE INSULATION.
3. PROVIDE MINIMUM 2 LAYERS OF POLYISOCYANURATE INSULATION MECHANICALLY FASTENED TO 1/2" METAL ROOF DECK. MINIMUM INSULATION "R" VALUE SHALL BE 30. (SINGLE LAYER WILL NOT ACHIEVE REQUIRED R-VALUE & THICKNESS). TOTAL ROOF SYSTEM SHALL HAVE 60 MPH WIND RESISTANCE. PHYSICAL INTEGRITY AND IMPACT RESISTANCE IN ACCORDANCE WITH ASTM 653, D3746 AND D4212. ALL ROOF COMPONENTS TO BE INSTALLED PER MANUF. INSTRUCTIONS. ROOF COVERING MIN. CLASS "C" CONSTRUCTION: (WHEN TESTED IN ACCORDANCE WITH UL 790 & 1256.)
4. ROOFING SYSTEM SHALL HAVE FIFTEEN (15) YEAR WARRANTY FROM DATE OF SUBSTANTIAL COMPLETION. ROOFING SYSTEM SHALL BE INSTALLED BY A QUALIFIED CONTRACTOR, APPROVED BY ROOFING SYSTEM MANUFACTURER, TO INSTALL MANUFACTURER'S PRODUCTS. ROOFING SYSTEM TO BE INSTALLED IN STRICT ACCORDANCE WITH THE ROOFING SYSTEM MANUFACTURER'S WRITTEN TECHNICAL SPECIFICATIONS. PROVIDE ROOFING SYSTEM BY THE FOLLOWING APPROVED MANUFACTURERS OR APPROVED EQUAL:
- FIRESTONE BUILDING PRODUCTS (800)428-4442
  - CARLISLE, INC. (717)245-7000
  - JOHNS MANVILLE (800)654-3103

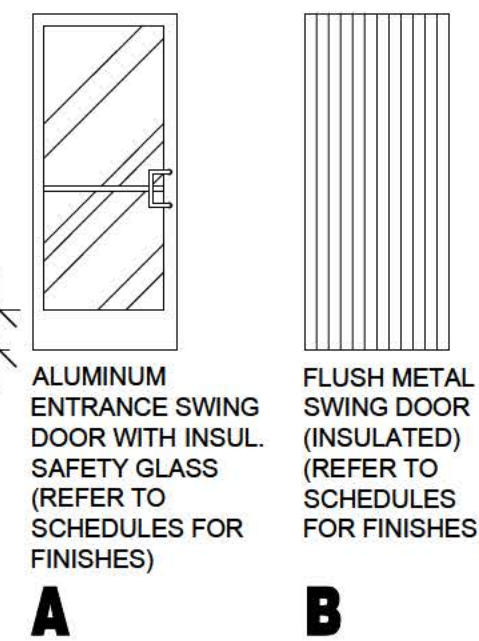

## DOOR TYPES

(SCALE 1/4" = 1'-0")

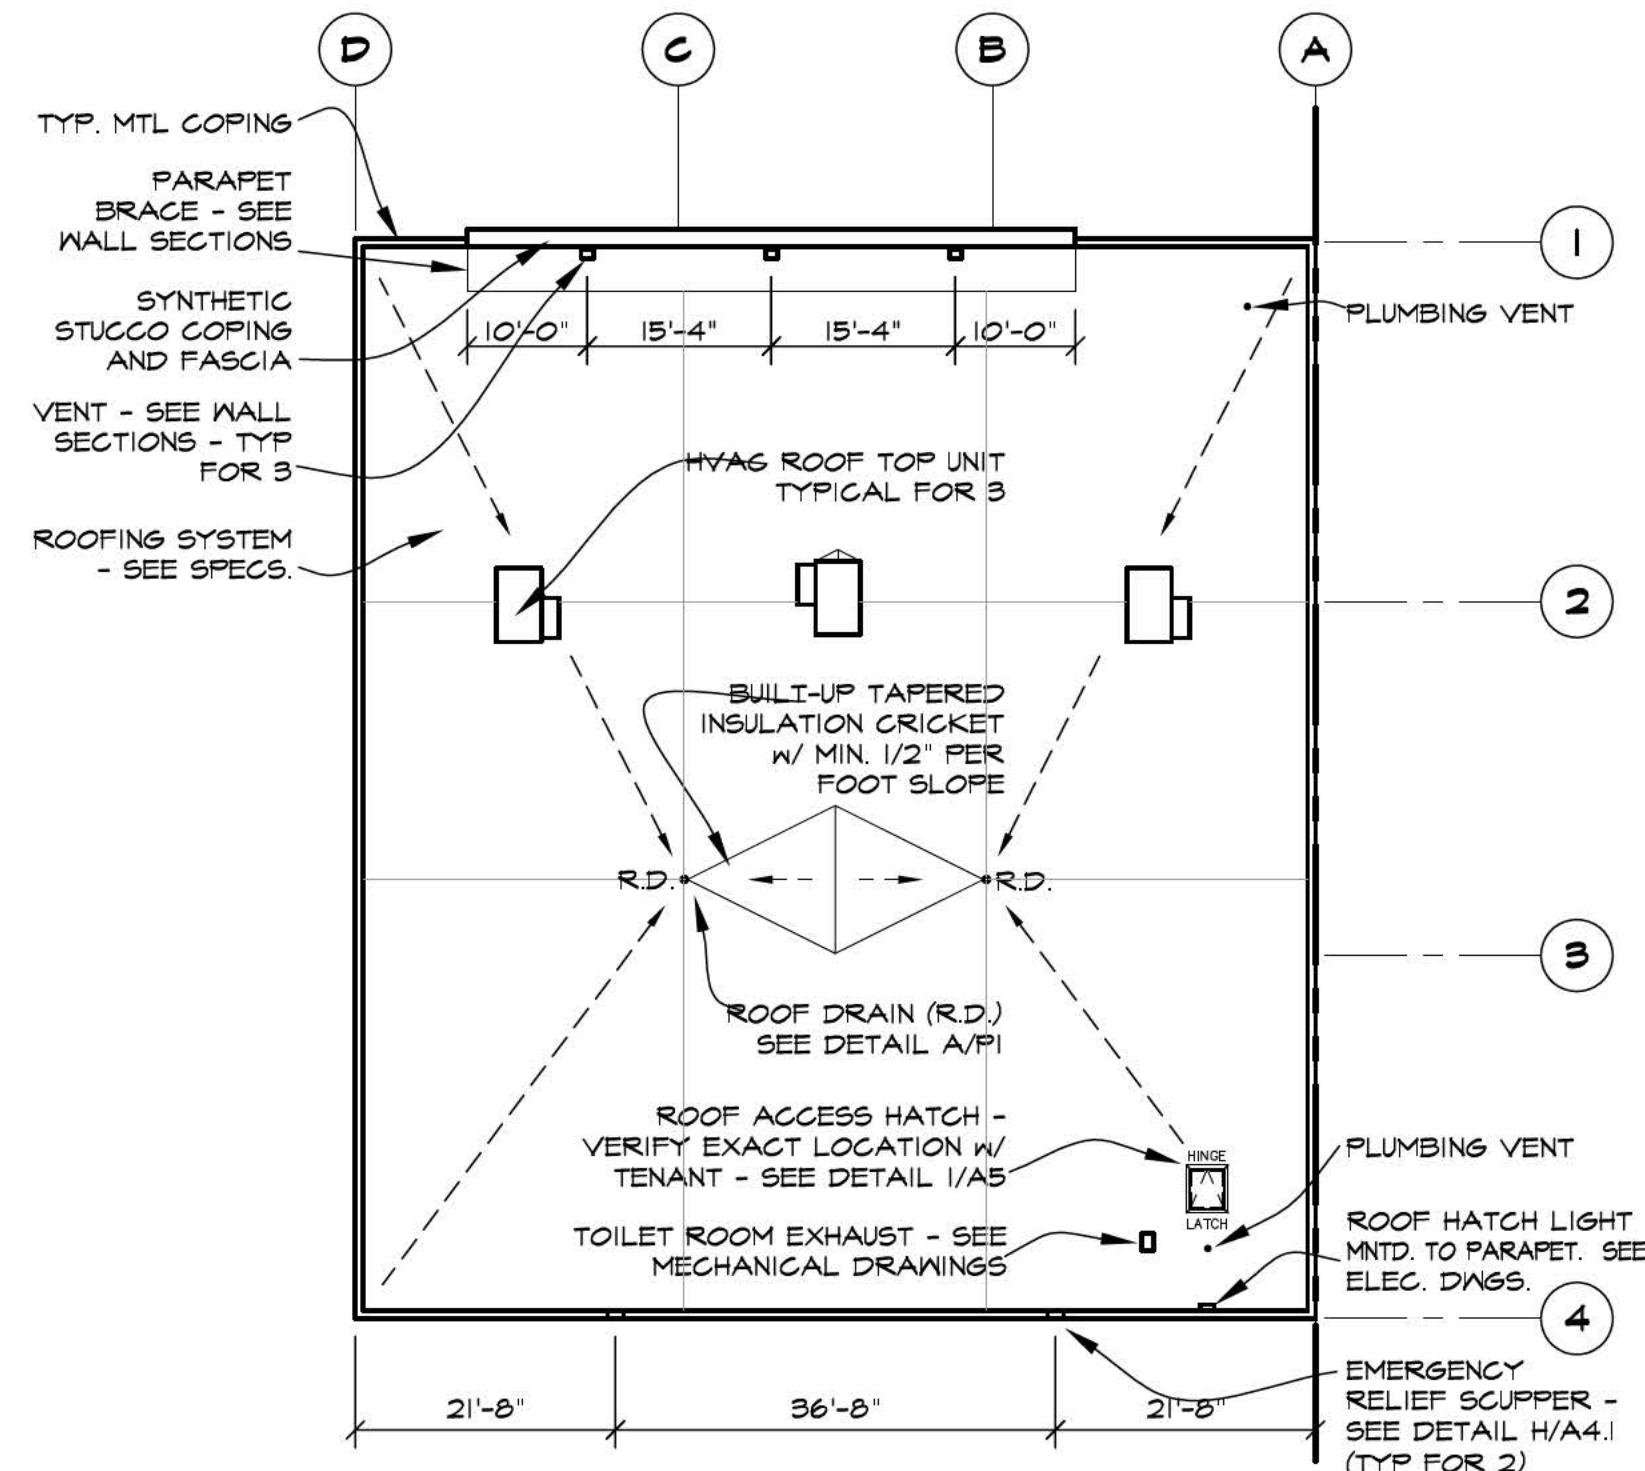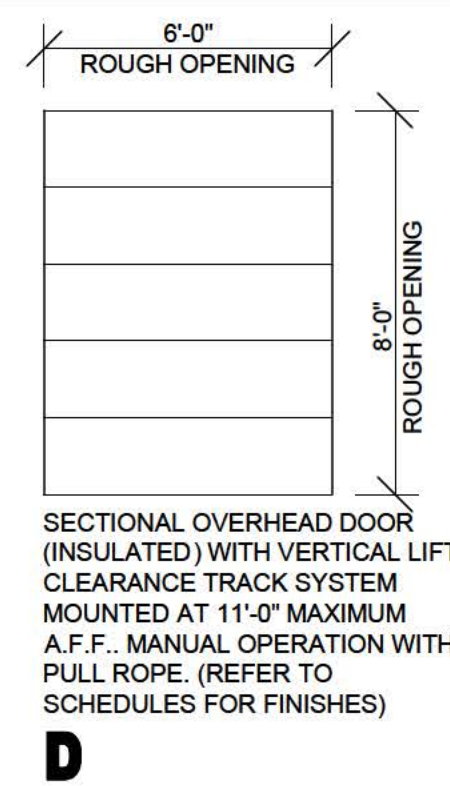

### ROOF PLAN

SCALE: 1/16" = 1'-0"

## DOOR HARDWARE SCHEDULE

#### ARE NOTES:

1. ALL HARDWARE TO BE ADA AND ANSI COMPLIANT.
2. VERIFY COMPATIBILITY OF HARDWARE SPECIFIED. NOTIFY ARCHITECT OF INCOMPATIBILITY ISSUES PRIOR TO ORDERING AND INSTALLATION.

#### SET NO. 1 (DR. 1) - EXTERIOR STOREFRONT DOOR

- 1 CYLINDER: 20-062 X US26D - "E" KEYWAY (REMOVABLE CORE)..... SCHLAGE

#### (FOLLOWING REQUIRED HARDWARE FURNISHED WITH WINDOW FRAMING DOOR SYSTEM)

- 1 PAIR OFFSET PIVOTS: 156188 X 626..... RIXON
- 1 DEADLOCK: MS1850S X 626..... ADAMS RITE
- 1 DEADLOCK LEVER: 4550 X 626..... ADAMS RITE
- 1 STRIKE: MS4002 X US28..... ADAMS RITE
- 1 SET PUSH/PULLS: 86-151 ULTRALINE W/ OFFSET PULL X 626..... EFCO
- 1 CLOSER: 4041-3077-18TJ-TB X 689 (ADJ. TO 8.5 LBS.)..... LCN
- 1 SET PERIMETER GASKETS: POLYMERIC BULB X LENGTH REQUIRED..... PEMKO
- 1 SWEEP: 345AP X LENGTH REQUIRED..... PEMKO
- 1 THRESHOLD: 270A X LENGTH REQUIRED (OFFSET PIVOT COMPATIBLE)  
(ANSI & ADA COMPLIANT)..... PEMKO

#### SET NO. 2 (DR. 2) - DELIVERY DOOR

- 1 CONTINUOUS HINGE: 780-112HD X LENGTH REQUIRED X 626..... HAGER
- 1 CYLINDER: 20-067 X 626 - "E" KEYWAY (REMOVABLE CORE)..... SCHLAGE
- 1 PROVIDE (2) SECURITY KEYS, (1) CORE KEY, (1) BITTED..... SCHLAGE
- 1 EXIT PANIC LOCK: 9300B X 486 X 689 - PRD03 X 630..... DORMA
- 1 (THROUGH SEX BOLT MOUNTING)..... DORMA
- 1 CLOSER: 8616DST X SNB1 X 689 (ADJ. TO 8.5 LBS.)..... DORMA
- 1 (THROUGH SEX BOLT MOUNTING)..... DORMA
- 1 SET PERIMETER GASKETS: QEBD-500 X LENGTH REQ'D..... SCHLEGEL
- 1 LATCH GUARD: LG100ZSF X 626 (STRAIGHT W/ PIN W/ SEX BOLTS)..... LATCHGUARD
- 1 DOOR VIEWER: 698 - 190 DEGREE X 626..... IVES
- 1 KICK PLATE: 190S X 8" X 34" X 630..... HAGAR
- 1 DOOR BOTTOM SEAL: 31321 X LENGTH REQUIRED..... GLOBAL
- 1 THRESHOLD: 31206 X LENGTH REQUIRED..... GLOBAL

#### SET NO. 3 (DR. 3) - OVERHEAD DELIVERY DOOR

- REQUIRED HARDWARE FURNISHED WITH OVERHEAD DOOR SYSTEM  
(LOCKING FROM INSIDE ONLY)

SEE BWCO DRAWINGS FOR INTERIOR DOORS

#### SET NO. 6 (DR. 7) - SHOWROOM EGRESS DOOR

- 3 HINGES: EC8B1100 X 4 1/2" X 4 1/2" X 626 X NRP..... HAGER
- 1 EXIT ONLY PANIC LOCK: 8300B X 486 X 689..... DORMA
- 1 CLOSER: 5300MLT X 689 (ADJ. TO 8.5 LBS.)..... HAGER
- 1 (THROUGH SEX BOLT MOUNTING)..... HAGER
- 1 SET PERIMETER GASKETS: QEBD-500 X LENGTH REQ'D..... SCHLEGEL
- 1 LATCH GUARD: LG100ZSF X 626 (STRAIGHT W/ PIN W/ SEX BOLTS)..... LATCHGUARD
- 1 DOOR BOTTOM SEAL: 31321 X LENGTH REQUIRED..... GLOBAL
- 1 THRESHOLD: 31206 X LENGTH REQUIRED..... GLOBAL

#### SET NO. 7 (DR. 8) - INTERIOR VESTIBULE DOOR

#### (FOLLOWING REQUIRED HARDWARE FURNISHED WITH WINDOW FRAMING DOOR SYSTEM)

- 1 PAIR OFFSET PIVOTS: 156188 X 626..... RIXON
- 1 SET PUSH/PULLS: 86-151 ULTRALINE W/ OFFSET PULL X 626..... EFCO
- 1 CLOSER: 4041-3077-18TJ-TB X AL (ADJ. TO 8.5 LBS.)..... LCN
- 1 SET PERIMETER GASKETS: POLYMERIC BULB X LENGTH REQUIRED..... PEMKO

O'REILLY AUTO PARTS  
DOLTON PLAZA  
1317 E. SIBLEY BLVD. DOLTON, IL 60419  
FOR: DEPARTMENT PROPERTY GROUP, LLC

SHEET TITLE  
DOOR SCHEDULE  
ROOF PLAN

1906

A5