



LAND MOBILE RADIO PRICE GUIDE May 2026 Edition



Updates in May 2026 Edition

[illegible]

NOTE: Pricing subject to change without prior notice. See bulletins on Dealer Tools and contact your Rep for pricing.

TABLE OF CONTENTS:

PORTABLES

[NX-5200 / 5300](#)

[NX-5400](#)

[NX-3200 / 3300](#)

[NX-3400](#)

[NX-3220 / 3320](#)

[NX-3420](#)

[NX-1200NV / NX-1300NU](#)

[NX-1200NV / NX-1300NU \(K3/K6\)](#)

[NX-1200DV / NX-1300DU](#)

[NX-1200DV / NX-1300DU \(K3/K6\)](#)

[NX-1200AV / 1300AU](#)

[NX-1202AV / 1302AU](#)

[NX-3210R](#)

[PKT-300](#)

MOBILES

[NX-5700 / 5800 / 5900](#)

[NX-5700H / 5800H](#)

[NX-5600H](#)

[NX-5000 Mobile Acc.](#)

[NX-3720HG / 3820HG](#)

[NX-3920G / 3921G](#)

[NX-1700HNV / 1800HNU](#)

[NX-1700HDV / 1800H DU](#)

[NX-1700HAV / 1800HAU](#)

SOFTWARE

[KPT-300LMC](#)

[KPG-180AP](#)




KPT-300LMC v2.0

License Management Client

Table of Contents

STANDARD

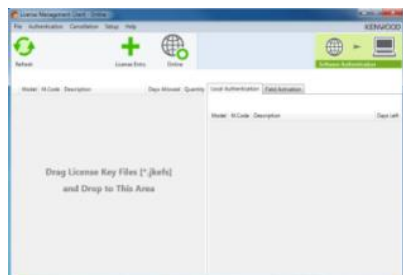

KPT-300LMC System Requirements

- Operating system: Windows 10 and 11
- CPU: Follow operating system requirement
- Memory: Follow operating system requirement
- 2GB disk storage space or more
- WXGA (1280 x 768) or larger display
- IBM PC/AT compatible
- Microsoft .NET Framework 4.5 or 4.6
- USB port necessary for USB offline authentication

• Minimum of one workstation with internet access is required to connect to Kenwood License authentication server.

GENERAL FEATURES

Kenwood Software Authentication Tool

KPT-300LMC is a mandatory software package to securely authenticate Kenwood radio programming tool, software, and radio feature licenses.

Radio Feature Activation

KPT-300LMC allows dealership driven radio function update of Kenwood digital radios at your own pace. Provides greater flexibility of dealerships' radio inventory to switch to different digital modes or expand radio capability when needed.

Account-wide Radio License Control

KPT-300LMC provides secure account control with account registration mechanism. Under same account, multiple work stations can access to the purchased Radio Feature license pool to activate licenses to radios.

Online and off the network authentication

KPT-300LMC requires online authentication but also offers off the network authentication method in case of needing field authentication where network connectivity may be difficult.

For further details, download KPT-300LMC from MyTools > Product > Software. By installing the software, you will find detailed operation and function manual of KPT-300LMC.

Applicable Radio Feature Licenses

- NX-5x00 series portable & mobile
- NX-5x00S series portable & mobile
- NX-3x00 series portable
- NX-3x20 series portable & mobile
- NX-1x00 series portable
- NX-P1x00 series portable
- NXR-1x00 series repeaters

Applicable System Software

- NXDN Type-C Gen2 Trunking System
- DMR Tier 2 & Tier 3 IP Gateway

Applicable Programming Software

- KPG-D1/D1N (NX-5x00/5x00S)
- KPG-D2/D2N (NXR-5000)
- KPG-D3/D3N (NX-3x00/3x20)
- KPG-D5 (NX-P500)
- KPG-D6/D6N (NX-1x00/NX-P1x00)
- KPG-D7 (NXR-1x00)

Applicable Software Application

- For various radio series
- KAS-20 AVL & Dispatch Software
 - KPG-1004NC Network Manager Client

- For NX-5x00/5x00S/3x00/3x20 series
- KPG-AE1 Software AES Keyloader
 - KPG-DE1 Software DES Keyloader
 - KPG-180AP OTAP Management Software

TO PLACE AN ORDER FOR SOFTWARE:

1. Complete the Software License Key Request Form.
2. Submit along with your PO to the Land Mobile Order Desk via:
 - a) E-Mail: lmrorderdesk@us.jvckenwood.com
 - b) Online ordering portal.
3. License Keys will be E-mailed to the address provided on the order form.

Note: A unique license key is required for each PC with software installed. A single license key will not authorize multiple PCs.

PC SOFTWARE VOLUME DISCOUNT

Software License Key Discount Structure

1 License Key	---
2 ~ 4 License Keys	10% OFF
5 ~ 14 License Keys	35% OFF
15 ~ 24 License Keys	40% OFF
25+ License Keys	45% OFF

LICENSING SYSTEM		LIST
KPT-300LMC	License Management Client (downloadable from MyTools website)	NC
L-5000	KPT-300LMC Account Registration Key	NC
Note: Must submit "KPT-300LMC - Account Request Form" to Land Mobile Order Desk.		
Please find and download form from KENWOOD MyTools website > Product > Forms		

KPT-300LMC v2.0

License Management Client

Table of Contents

Optional Offline Authentication Key

LIST

KWD-OFL-USB	USB License Storage Hardware key for Radio Feature License	266.80
-------------	--	--------

Note:

- Must purchase Radio Feature Licenses separately.
- Can be used with only one (1) KPT-300LMC Account Registration Key.
- Requires KPT-300LMC V1.10 or higher.
- Cancellation rule is different from standard Online/Offline Authentication. Please refer to a leaflet bundled with KWD-OFL-USB.


Warranty Information:

- Damaged USB License Storage "KWD-OFL-USB"
- a. Remaining Licenses will not be warranted.
- b. Licenses not uploaded to the License Management Server will not be warranted.

KPG-180AP

OTAP Management Software

[Table of Contents](#)

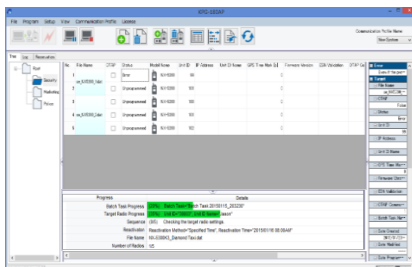

■ KPG-180AP System Requirements

- Operating system: Windows 7, 8, 8.1, & 10
 - CPU: Follow operating system requirement
 - Memory: Follow operating system requirement
 - 200MB disk storage space or more
 - WXGA (1280 x 768) or larger display
 - Microsoft .NET Framework 4.5.2 or 4.6.x
 - LAN port (supporting 10BASE-T or later standard)
 - USB port necessary for base radio setup
- Workstation is recommended to have internet access to connect to Kenwood License authentication server.
 Offline Authentication is also available.

STANDARD

■ GENERAL FEATURES

- **Over-the-air Programming**
 KPG-180AP manages Over-the-air programming procedure using various transmission methods via base radio or direct IP connection to two-way radio system.
- **Multi-system and Multi-protocol Support**
 KPG-180AP supports up to 16 unique two way radios systems from P25¹, NXDN Conventional, NXDN Trunking, DMR Tier 2 Conventional, and DMR Tier 3 Trunking systems allowing dealerships or administrators to manage fleets across multiple systems from single software tool.
- **100,000 manageable field units**
 KPG-180AP supports up to 100,000 field units and multiple programming templates.
- **Smart & Time Efficient Data Transmission**
 KPG-180AP tracks the change made to radio program data. Upon transmitting over-the-air, KPG-180AP automatically selects the changed portion of program data and minimize the transmitting data so to keep traffic low and fast.
- **ESN Validation**
- **OTAP Batch Task Scheduling**
- **Various Program File Activation Methods**
 (Auto apply, Next power on, User operation, time, etc)

■ Applicable Target Radios

- NX-5x00 series portable & mobile
- NX-5x00S series portable & mobile
- NX-3x00 series portable
- NX-3x20 series portable & mobile

■ Applicable Base Radios

- NX-5x00 series mobile
- NX-5x00S series mobile
- NX-3x20 series mobile

■ Applicable Base Radio Protocols

- NXDN Conventional
- NXDN Type-C Trunking and Gen2 Trunking
- Kenwood DMR Tier 2 Conventional
- Kairos DMR Tier 3 Trunking
- P25 Conventional (Radio to Radio)

■ Applicable direct IP connection

- NXDN Conventional system
- NXDN Type-C Trunking and Gen2 system
- Kairos DMR Tier 2 Conventional system
- Kairos DMR Tier 3 Trunked system
- Tait DMR Tier 3 Trunked system

Note: Support for encryption options depends on either the base radio configuration or the IP connection settings. Please check the Basic Operations and Function Reference Manuals to

OVER THE AIR PROGRAMMING (OTAP)

LIST

KPG-180AP	OTAP Manager Software (Windows® 7/8/8.1/10) License includes: Software manages up to fifty(50) radio program files, one communication profile for each NXDN serial connection, DMR serial connection, NXDN Type-C IP, and DMR AIS IP connection Note: For each additional serial connected base radio or IP connected RF system, one additional communication profile is required. Note: Requires KPT-300LMC for license authentication	1,049.30
-----------	---	----------

FLEET RADIO EXPANSION UPGRADES

LIST

KWD-AP5100	Additional 100 Radio Package License for 1 PC Note: License includes 100 subscriber radios OTAP License.	1,980.00
KWD-AP5250	Additional 250 Radio Package License for 1 PC Note: License includes 250 subscriber radios OTAP License.	3,465.00
KWD-AP5500	Additional 500 Radio Package License for 1 PC Note: License includes 500 subscriber radios OTAP License.	4,950.00

ADDITIONAL RADIO SYSTEM PROFILES

LIST

KWD-AP1-CA	Additional NXDN Base Radio License will allow user to add <u>One Base radio</u> for either NXDN Conventional, NXDN Type-C Trunking, or Gen2 Trunking	297.00
KWD-AP2-CP	Additional IP Connected NXDN System License will allow user to add <u>One IP connected RF system</u> for either NXDN Conventional, NXDN Type-C Trunking, or Gen2 Trunking	495.00
KWD-AP3-P25	Additional P25 Conventional Base Radio License will allow user to add <u>One Base radio</u> for P25 conventional radio to radio over-the-air reprogramming	950.30
KWD-AP4-DA	Additional DMR Base Radio License will allow user to add <u>One Base radio</u> for either Kenwood DMR Tier 2 Conventional, or Kairos DMR Tier 3 Trunking	297.00
KWD-AP5-DP	Additional IP Connected DMR System License will allow user to add <u>One IP connected RF system</u> for Kairos DMR Tier 2 Conventional, Kairos DMR Tier 3 Trunking, or Tait Tier 3, or Trunking 2.5 Systems	495.00



NX-5200/5300

VHF/UHF Digital & FM Analog Portable Radios

Table of Contents



<Standard Key Model> <Full Key Model>

All NX-5000 series portables include:

- Belt Clip (KBH-11)
- Universal Connector Cap
- User Guide
- Premium Warranty: 3 Years*

All Accessories / options: 1 Year

Purchase Battery, Charger, Antenna separately

*Note:

1. To meet IP grades and MIL, the universal connector cap or KENWOOD official accessory must be installed/connected.
2. To maintain immersion specs (IP67/68), all warranty service must be done by one of the three National Kenwood Authorized Service Centers. IP67/68 Certification is valid under the 3 year premium warranty. No re-certification is available.

Because of spurious signal (birdie), the following frequencies (and ± 10 kHz ranges) are not allowed:

- | | | |
|------------|------------|------------|
| • 144.0000 | • 384.0000 | • 460.8000 |
| • 147.4560 | • 403.2000 | • 480.0000 |
| • 153.6000 | • 422.4000 | • 499.2000 |
| • 172.0325 | • 432.0000 | • 518.4000 |
| • 172.8000 | • 441.6000 | |

Approved by CSA-us International Inc. for Classes I, II & III, Div. 1, Groups D, E, F, G and are also approved for non-Incendive use in Class I, Div. 2, Groups A, B, C hazardous locations.

Note: Environmental conditions are less than 32°F (0°C), KENWOOD carrying cases must be used.

STANDARD

■ GENERAL FEATURES

- 6 W (136-174 MHz) Models
- 5 W (380-470, 450-520 MHz) Models
- 1024 CH-GID / 128 Zones
- Standard Key Models (w/o numeric keypad)
- Full Key Models (w/ numeric keypad)
- Full Color 1.74" (240 x 180 pixels) Transflective TFT Display
- Multi-line Text Display
- Function/Status Icons
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- Transmit/Busy/Call Alert/Warn LED
- On/Off Volume Knob
- 16-Position Mechanical Selector (w/ a stopper)
- 4-way Directional-pad (D-pad)
- 2 Position Lever Switch
- Emergency/AUX Key
- 3 Side PF Keys
- 1W Speaker Audio
- Multi Digital Protocol ¹
- Emergency Call Features
- Built-in GPS Receiver / Antenna
- Built-in Bluetooth® 4.0 Module
- Built-in Motion Sensor
- Built-in 56-bit DES Encryption (4 keys programmable by KPG-D1(N)K)
- Active Noise Reduction (ANR)
- KPG-D1N Windows® FPU
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IP67/68 Immersion
- Color Housing Option
- Digital Encode/Decode Format

■ DIGITAL – P25 MODE

- P25 Conventional Option
- P25 Phase 1 Trunking Option
- P25 Phase 2 Trunking Option
- Conv/Trunking OTAR Option
- Conventional Voting Scan Option
- Packet Data Option for P25 OTAR, GPS & OTAP
- Text Data
- Radio Authentication
- Tone Paging
- ARC4 Encryption Option

1. Multi Digital Protocol can be used for two(2) of the three(3) Digital Protocols set by programming software. P25/DMR Digital Protocols are options.

OPTIONAL FEATURES

■ GENERAL FEATURES

- 4000 Channel (KWD-5000CH)
- Front Panel Programming (KWD-5001FP)
- microSD/microSDHC Memory Card Slot (KWD-5002SD)
- Built-in Bluetooth® Module for Data (KWD-5003BT)
- Remote Control Commands by Subscriber Units (KWD-5007RC)
- 256-bit AES Encryption (KWD-AE30K/31K Encryption Module required)
- Battery Management Solution (KSC-Y32K Charger & KAS-12K Software License Key required)

■ DIGITAL – P25 MODE

- Conventional Features (KWD-5100CV)
- Phase 1 Trunking Features (KWD-5100CV & 5101TR)
- Phase 2 Trunking Features (KWD-5100CV & 5101TR & 5102TR)
- Conventional OTAR (KWD-5103RK)
- Trunking OTAR (KWD-5103RK & 5106DT)
- Conventional Voting Scan (KWD-5105VT)
- Packet Data required for Trunked OTAR/GPS/OTAP (KWD-5106DT)
- P25 ARC4 Encryption (KWD-5107EE)
- Link Layer Authentication (KWD-5100CV & KWD-5101TR & KWD-AE3x Encryption Board Required)
- One active key per system, up to 32 systems

■ DIGITAL – DMR MODE

- DMR Tier 2 Conventional and Trunking 2.5 Features (KWD-5300CV)
- DMR Tier 3 Trunking Features (KWD-5300CV & KWD-5301TR)

■ DIGITAL – NXDN® MODE

- NXDN® Conventional / TYPE-C (Gen1/Gen2) Trunking
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Paging Call
- Emergency Call
- All Group Call
- Digital Two-Tone
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

■ DIGITAL – DMR MODE

- DMR Tier 2 Conventional Option
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Optional
- Site Roaming

■ ANALOG MODE

- Conventional Zones
- LTR® Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF
- Built-in Voice Inversion Scrambler

NEXEDGE® P25 DMR			NX-5200/5300 VHF/UHF Digital & FM Analog Portable Radios		Table of Contents
RADIO					LIST
Standard Key Models					
NX-5200K2	VHF (136-174MHz), 6.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1094.50
NX-5300K2	UHF (450-520MHz), 5.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1094.50
NX-5300K5	UHF (380-470MHz), 5.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1094.50
Full Key Models					LIST
NX-5200K3	VHF (136-174MHz), 6.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1162.00
NX-5300K3	UHF (450-520MHz), 5.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1162.00
NX-5300K6	UHF (380-470MHz), 5.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1162.00
CSA US APPROVED MODELS					LIST
Must Order L-5039 & "KNB-LS5CU or KNB-LS7M" Intrinsically Safe Battery per radio <i>*Note: microSD card is not allowed to use as Intrinsically Safe Option.</i>					
NX-5200-ISCK2	VHF (136-174MHz), 6.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1094.50
NX-5200-ISCK3	VHF (136-174MHz), 6.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1162.00
NX-5300-ISCK2	UHF (450-520MHz), 5.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1094.50
NX-5300-ISCK3	UHF (450-520MHz), 5.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1162.00
NX-5300-ISCK5	UHF (380-470MHz), 5.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1094.50
NX-5300-ISCK6	UHF (380-470MHz), 5.0 Watts	NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking			1162.00
SOFTWARE LICENSING & RADIO FEATURE OPTIONS					
IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires KPT-300LMC & L-5000 for activation of Radio Feature licenses. Submit completed form to LMR Order Desk for all Software license and Radio Feature license options. License Keys will be E-mailed to the address provided on the order form. Form is available on MyTools website > Product > Forms - <u>FPU & Software Applications:</u> Software License Key Request Form - <u>Radio Feature Licenses:</u> Radio Feature License Keys Request Form <i>Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.</i>					
General Radio Features					LIST
KWD-5000CH	License Key for 4000 Channel Expansion				499.00
KWD-5001FP	License Key for Front Panel Programming				356.30
KWD-5002SD	License Key for microSD Memory Card Slot Activation				124.70
KWD-5003BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-5003BT. You can pair with any Bluetooth audio device without this option.				41.70
KWD-5007RC	License Key for Remote Control by Subscriber Units Note: - P25 Mode is <u>NOT</u> available. - This license may be used by Administrator due to Stun/Revive/Kill. - The license is required for only Transmitting of Remote Control. - PC command for Remote Control does <u>NOT</u> require the license.				47.50
P25 Radio Features					LIST
KWD-5100CV	License Key for P25 Conventional				683.20
KWD-5101TR	License Key for P25 Phase 1 Trunking (requires KWD-5100CV) Note: Required for Link Layer Authentication				617.80
KWD-5102TR	License Key for P25 Phase 2 Trunking (requires KWD-5100CV & KWD-5101TR)				475.20
KWD-5103RK	License Key for P25 OTAR (requires KWD-5106DT for a Trunking Operation)				831.70
KWD-5105VT	License Key for P25 Conventional Voting Scan				142.70
KWD-5106DT	License Key for P25 Trunking OTAR / GPS / OTAP Note: Conventional (OTAR/GPS/OTAP) does NOT require KWD-5106DT.				213.80
KWD-5107EE	License Key for P25 ARC4 Enhanced Encryption				NC
DMR Radio Features					LIST
KWD-5300CV	License Key for DMR Tier 2 Conventional and Trunking 2.5				71.30
KWD-5301TR	License Key for DMR Tier 3 Trunking (requires KWD-5300CV)				158.30
KWD-5500EE	License Key for DMR ARC4 Enhanced Encryption				47.50

NX-5200/5300

VHF/UHF Digital & FM Analog Portable Radios

[Table of Contents](#)

ANTENNAS		LIST
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00
KRA-27M3	UHF whip antenna 400-450 MHz	22.00
KRA-22M	VHF low-profile helical antenna 148-162 MHz	22.00
KRA-22M2	VHF low-profile helical antenna 162-174 MHz	22.00
KRA-22M3	VHF low-profile helical antenna 136-150 MHz	22.00
KRA-23M	UHF low-profile helical antenna 450-490 MHz	22.00
KRA-23M2	UHF low-profile helical antenna 470-520 MHz	22.00
KRA-23M3	UHF low-profile helical antenna 403-430 MHz	22.00
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30
KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-42M3	UHF stubby antenna 403-430 MHz	18.30
KRA-25	High gain VHF helically loaded whip antenna 148-162 MHz	46.00
KRA-28	Broad-band VHF helically loaded whip antenna 140-170 MHz	56.30
KRA-29	Broad Band UHF Whip Antenna 380-430 MHz	49.30
BATTERIES AND CHARGERS		LIST
<i>*All of batteries listed below except KBP-10 is compatible with IP67/68 when it is used with a radio.</i>		
KNB-L1M	Li-ion 2000mAh (Compact Slim)	158.30
KNB-L2M	Li-ion 2600mAh (Standard)	185.80
KNB-L11M	Li-ion 3900mAh (High Capacity)	240.50
	Note: The KNB-L11 battery requires NX-5x00 firmware 5.12 or newer	
KNB-L12M	Laminated Li-ion 3000mAh (High Capacity)	210.00
KNB-L13M	Laminated Li-ion 4000mAh (High Capacity)	266.00
KNB-LS5CU	CSA US Intrinsically Safe Battery Li-ion 2000mAh	280.00
	Note: Due to the I.S. circuitry on the KNB-LS5CU, the cells may lose charge during storage. To prevent loss of capacity during storage, charge the battery for 10 minutes at least every 4 months with the KSC-32, KSC-Y32K, KSC-52BK, KSC-326K, KSC-326AK or KSC-526K. [Intrinsically Safe Option]	
KNB-LS7M	CSA US Intrinsically Safe Battery Li-ion 3800mAh	402.70
	Note: Due to the I.S. circuitry on the KNB-LS7M, the cells may lose charge during storage. To prevent loss of capacity during storage, charge the battery for 10 minutes at least every 4 months with the KSC-32, KSC-Y32K, KSC-52BK, KSC-326K, KSC-326AK or KSC-526K. [Intrinsically Safe Option]	
KBP-10	AA Alkaline Refillable Battery Pack (12 AA: 9V). Cells not included.	157.50
	Note: The color of the case is Orange.	
Single Unit Desk Chargers		
KSC-52BK	Rapid rate single unit charger for KNB-L1/KNB-L2/KNB-L3/KNB-LS5/KNB-LS7/KNB-33L/PB-45L/KNB-47L/KNB-48L/KNB-72LC/KNB-70LEX/KNB-41NC/KNB-50NC/KNB-54N	107.00
KSC-52AK	Rapid rate single unit charger for the KNB-L11/L12/L13 high capacity battery	107.00
6 Unit Chargers		
KSC-526K	Rapid rate 6-unit charger CEC Compliant	906.20
	Note: Requires charging pocket KSC-52PBW and/or KSC-52PCW, and/or KSC-52PAW	
KSC-52PBW	Charging pocket for KSC-526K and/or to convert the pocket style of a KSC-52 Single unit charger compatible with the KNB-L1, L2, L3, LS5 and LS7 batteries, and NX-205/305 and NX-210 series	12.00

	NX-5200/5300 VHF/UHF Digital & FM Analog Portable Radios	Table of Contents
---	--	--

KSC-52PAW	Charging pocket for KSC-526K and/or to convert the pocket style of a KSC-52 Single unit charger compatible with the KNB-L11/L12/L13 battery	12.00
KMB-526K	Wall Mount Bracket for KSC-526K	91.50

Vehicle Chargers/Adapters

KVC-52	Rapid rate DC vehicular charger adapter for the KSC-52BK/52AK chargers (chargers not included; includes steel mounting base & locking bracket, and DC cable with a fused cigarette lighter plug)	208.30
KVC-23A	Rapid rate DC vehicular charger for TK-5x10/5x20, NX-5x00/x00/x10/x20, TK-x180, TK-x170, & TK-x360 portables with Lithium Ion /Lithium Polymer/NiMH packs only Note: Compatible with KNB-L11 battery	402.70

CARRYING ACCESSORIES

		<i>LIST</i>
KBH-11	Spring action belt clip (2.5")	19.70
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-6SW	Leather swivel belt loop / detachable swivel D-Ring back	29.50
KLH-137ST	Firemen's Heavy-Duty Leather Shoulder Strap for a Heavy-Duty Leather Case	49.30
KLH-200K3	Heavy duty leather carrying case for NX-5000 series with KNB-L1/L2/L3/LS5CU (for both keypad models)	59.20
KLH-201K3	Nylon carrying case for NX-5000-series with KNB-L1/L2/L3/LS5CU (for both keypad models)	35.20
KW9170-LF	Heavy Duty Leather Carrying Case for NX-5x00 portables with KBP-10, Non-swivel, D-rings	90.00

SPECIAL COLOR HOUSING

		<i>LIST</i>
KWD-YH-5000	Yellow Housing Kit for NX-5000 series Portables (Standard Key Model K2/K5 Only) Order L-5024 for Factory Install. (Eligible for warranty of IP67/68 immersion / Intrinsically Safe Option must be installed by Kenwood.) Note: If you order only housing and perform Dealer Installation, IP67/68 Warranty Claim will not be eligible.	53.70

MICROPHONES & AUDIO ACCESSORIES

***IP grades for microphones and audio accessories are decided by each item.**

		<i>LIST</i>
KMC-70M	MIL-SPEC, IP54/55/67/68* Speaker Mic with Active Noise Reduction Note: IP68 is available only when used with NX-5000 series portable [Intrinsically Safe Option]	174.20
KMC-72W	MIL-SPEC, IP54/55/67 Noise-cancelling Speaker Mic [Intrinsically Safe Option]	133.80
KMC-49	MIL-SPEC, Speaker Mic. with Antenna Connector Note: 5/16" Coax cable hex wrench included (antenna is not included). [Intrinsically Safe Option]	495.00
KEP-1	3.5mm earphone kit for KMC-41/42W/54W/70M/72W Speaker Mics [Intrinsically Safe Option]	74.50
KEP-2	2.5mm earphone kit for KMC-49 Speaker Mic [Intrinsically Safe Option]	74.50
KCT-51	Hirose 6-pin Adapter (adapts KVL/aftermarket audio acc. to portable connector) [Intrinsically Safe Option]	306.70
KHS-11BL	2-wire palm mic w/earphone, universal connector (Black) [Intrinsically Safe Option]	223.20
KHS-12BL	3-wire mini lapel mic w/earphone, universal connector (Black) Note: NOT compatible with TDMA operations [Intrinsically Safe Option]	283.70
KHS-14C	Lt. Wt. Single muff headset w/boom mic & In-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	155.80
KHS-15DC-BH	Hvy-duty behind-the-headset w/boom mic & earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	611.00
KHS-15D-OH	Hvy-duty noise reduction over-the-headset w/noise cancelling boom mic & PTT [Intrinsically Safe Option]	522.80

NX-5200/5300

VHF/UHF Digital & FM Analog Portable Radios

[Table of Contents](#)

Sensear Bluetooth® Headsets Non-IS Models (SENS® Technology)

SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB	775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	775.00

Sensear Bluetooth® Headsets IS Rated Models (SENS® Technology)

SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB	940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB	1150.00

*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety:

IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4 -20°C to +40°C, T3C -20°C to +50°C

ENCRIPTION & OPTION MODULES LIST

KWD-AE30K	AES FIPS140-2 Level 1 & DES Encryption Module (Multi-Key) Order a Labor Code L-5003 if installation is required. (Eligible for warranty of IP67/68 immersion / Intrinsically Safe Option must be installed by Kenwood. If you order only a Module and perform Dealer Installation, IP67/68 Warranty Claim will not be eligible.) KWD-AE30K requires: a Motorola KVL3000 Plus/4000 key loader device. KWD-AE30K is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1). Note: Required for Link Layer Authentication [Intrinsically Safe Option]- Must be Kenwood installed for I.S.	1137.30
KWD-AE31K	AES & DES Encryption Module (Multi-Key) Order a Labor Code L-5004 if installation is required. (Eligible for warranty of IP67/68 immersion / Intrinsically Safe Option must be installed by Kenwood. If you order only a Module and perform Dealer Installation, IP67/68 Warranty Claim will not be eligible.) Note: Requires KPG-AE1/DE1 software key loader or Motorola KVL3000 Plus/4000 key loader device. KWD-AE31K is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Note: Required for Link Layer Authentication [Intrinsically Safe Option]- Must be Kenwood installed for I.S.	737.20
KCT-48VU	External Vibration Unit Note: Audio accessories cannot be used when this option installed. KCT-48VU does not support the P25 digital mode calling or paging features [Intrinsically Safe Option]	114.00
KPG-AE1K	AES/DES Encryption Software Key Loader for KWD-AE31K Authentication by KPT-300LMC is required Note: KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A).	649.10
KPG-DE1K	DES Encryption Software Key Loader for KWD-AE31K Authentication by KPT-300LMC is required	436.50

SERVICE RELATED ACCESSORIES LIST

KPG-D1NK	License Key for KPG-D1NK Programming Software for NX-5000 Portable/Mobile (Windows® Vista/7/8/8.1/10) Note: Requires KPT-300LMC for authentication	184.00
----------	--	--------

P25 Trunked Programming Capability:

USB Key Type: Advanced System Key (ASK)- See KWD-ASK-MK and AK

- For NX-5000 series radios.
- KWD-ASK-MK (Master Key): For trunked system operator (SYSOP). Required for activating KWD-ASK-AK Access keys. Securely embeds/encrypts the HSID.
- KWD-ASK-AK (Access Key): For Dealers/contractors. Activated by KWD-ASK-MK Master Key.
- KPG-D1NK supports up to 16 KWD-ASK-AK Access Keys (16 trunked networks).

KPG-36XM	Full Speed USB Programming interface cable Note: This cable with USB mode may used for SD Card Direct Access.	212.30
KPG-93	Encryption Key Loader Interface Cable for Motorola KVL-3000/3000 Plus/4000	374.20
KPG-93AUT	KVL-4000 Radio Authentication Cable Note: Only capable for P25 Radio Authentication. Not available for Encryption Key Loading.	469.50

 NX-5200/5300 VHF/UHF Digital & FM Analog Portable Radios Table of Contents		
KWD-ASK-AK	Access Key for KPG-D1NK P25 trunked programming Notes: Enables P25 Trunked system programming privileges in a KPG-D1NK. - For NX-5000 series only. - Must be activated by trunked system operator (SYSOP) with KWD-ASK-MK Master Key. - Must have KPG-D1NK. - Configurable expiration period of KWD-ASK-AK set by KWD-ASK-MK is available for 3 years for built in battery. USB Key must be replaced since the expiration set up dose not work after 3 years.	280.00
KWD-ASK-MK	Master Key for activating KWD-ASK-AK Access Keys - Restricted Purchase Requirements - Notes: - For NX-5000 series only. - Sold to trunked system operator (SYSOP) or SYSOP authorized entities only - Must have KPG-D1NK. - SYSOP must provide 3-digit HEX HSID to Kenwood with P25 Trunking System Keys Request Form placed on Kenwood Tools. - Purchase KWD-ASK-AK Access Keys if needed.	668.50
OPTIONAL CABLE FOR FOREST/FIRE SERVICES FEATURE SET (FSFS) OPTION		
KPG-CLN-14P	Portable-to-Portable Cloning Cable (14P:14P), 1m	301.80
INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-5002	NX-5200/5300/5400 Programming (with basic TX/RX check) Must submit <u>NX-x000 Series Programming Order Form</u> upon placing order for any programming services.	40.50
L-5003	Install KWD-AE30K in NX-5000 series Portable (Must purchase module separately)	81.00
L-5004	Install KWD-AE31K in NX-5000 series Portable (Must purchase module separately)	81.00
L-5005	KPG-D1NK System Key File (SKF) Note: Enables P25 Trunked system programming privileges in a KPG-D1NK. - Restricted Purchase Requirements - - Trunked system operator (SYSOP) must provide 3-digit HEX HSID to Kenwood with P25 Trunking System Keys Request Form placed on Kenwood Tools. - Must have KPG-D1NK. - Kenwood ships an encrypted *.SKF file via E-Mail to the address provided on the P25 Trunking System Keys Request Form placed on Kenwood Tools. - Non-SYSOP entities ordering L-5005 must provide verifiable written authorization from SYSOP to receive an *.SKF file. 3-digit HEX HSID are securely encrypted & embedded in the *.SKF file.	142.20
L-5024	Assemble Yellow Housing KWD-YH-5000 with NX-5000 series Portable	28.80
L-5039	Configure NX-5200/5300/5400 for CSA US Intrinsically Safe Must order <u>KNB-LS5CU or KNB-LS7M I.S. battery</u>	36.00
L-5051	P25 CAP Compliance of Non-Encrypted Radio - Disable Built-in DES	54.00
L-5077	FSFS++ Forest Service Feature Set - Factory Installation Adds Tactical Zone improvements and Analog Conv & P25 Conv Zone Cloning Note: Must purchase <u>per Radio</u> - This feature set is provided by custom firmware based on V4.21.00 firmware. - Feature set is applicable for analog conventional / P25 conventional modes only. - Feature set does not support mobile multi-deck configuration. - Feature set will not work with any other firmware options or customized firmware. - Custom firmware is not eligible for warranty compensation.	64.80

	NX-5200/5300 VHF/UHF Digital & FM Analog Portable Radios	Table of Contents
---	--	-----------------------------------

L-1849	FSFS++ Forest Service Feature Set - Field Installation Adds Tactical Zone improvements and Analog Conv & P25 Conv Zone Cloning Note: Purchase per application - <u>provided as Custom FW for unlimited radios</u> <u>To PLACE AN ORDER</u> , submit "Kenwood LMR Customization Application" form along with your PO via email (lmr-customs@us.jvckenwood.com) • This feature set is provided as custom firmware based on V4.21.00 firmware. • Feature set is applicable for analog conventional / P25 conventional modes only. • Feature set does not support Mobile multi-deck configuration. • Feature set will not work with any other firmware options or customized firmware. • Custom firmware is not eligible for warranty compensation.	1512.00
--------	--	---------

-- IMPORTANT NOTES regarding ENCRYPTION MODULES--

Encryption modules, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

Kenwood may request the following information to be submitted at time of order (this information must meet Kenwood internal approvals prior to shipment even if being returned to Kenwood later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination (customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

c) Intended Use of Radios: Law enforcement, security, operations, etc.

KWD-AE30 AES FIPS140-2 SCM , NIST Validation & Customer Shipping

A secure delivery method direct to the end user customer is required by the NIST AES FIPS 140-2 validation rules. For U.S. Federal Government entities the SCM must ship from Kenwood USA Corporation directly to the end user customer by a trusted carrier (FEDEX, UPS or a designated Kenwood USA Corporation employee); shipping/handling by a dealer or other entity is not acceptable. This may or may not be required by local/state government agencies or business/industrial users. Please check with the end use customer about their AES encryption handling requirements before ordering. Kenwood will not be responsible for shipments of KWD-AE30K modules to erroneous destinations specified on an order.



NX-5400

Table of Contents

700/800MHz Digital & FM Analog Portable Radio



<Standard Key Model >

<Full Key Model >

All NX-5400 series portables include:

- Belt Clip (KBH-11)
- Universal Connector Cap
- User Guide
- Premium Warranty: 3 Years*

All Accessories / options: 1 Year

Purchase Battery, Charger, Antenna separately

*Note:

1. To meet IP grades and MIL, the universal connector cap or KENWOOD official accessory must be installed/connected.
2. To maintain immersion specs (IP67/68), all warranty service must be done by one of the three National Kenwood Authorized Service Centers. IP67/68 Certification is valid under the 3 year premium warranty. No re-certification is available.

Due to spurious signal (birdie), the following frequencies (and ± 10 kHz ranges) are not allowed:

- 864.000

Approved by CSA-us International Inc. for Classes I, II & III, Div. 1, Groups D, E, F, G and are also approved for non-incendive use in Class I, Div. 2, Groups A, B, C hazardous locations.

Note: Environmental conditions are less than 32°F (0°C), KENWOOD carrying cases must be used.

STANDARD

■ GENERAL FEATURES

- 3 W (700/800 MHz) Models
- 1024 CH-GID / 128 Zones
- Standard Key Models (w/o numeric keypad)
- Full Key Models (w/ numeric keypad)
- Full Color 1.74" (240 x 180 pixels) Transflective TFT Display
- Multi-line Text Display
- Function/Status Icons
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- Transmit/Busy/Call Alert/Warn LED
- On/Off Volume Knob
- 16-Position Mechanical Selector (w/ a stopper)
- 4-way Directional-pad (D-pad)
- 2 Position Lever Switch
- Emergency/AUX Key
- 3 Side PF Keys
- 1W Speaker Audio
- Multi Digital Protocol 1
- Emergency Call Features
- Built-in GPS Receiver / Antenna
- Built-in Bluetooth® 4.0 Module
- Built-in Motion Sensor
- Built-in 56-bit DES Encryption (4 keys programmable by KPG-D1(N)K)
- Active Noise Reduction (ANR)
- KPG-D1N Windows® FPU
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IP67/68 Immersion
- Color Housing Option
- Digital Encode/Decode Format

■ DIGITAL – P25 MODE

- P25 Conventional Option
- P25 Phase 1 Trunking Option
- P25 Phase 2 Trunking Option
- Conv/Trunking OTAR Option
- Conventional Voting Scan Option
- Packet Data Option for P25 OTAR, GPS & OTAP
- Text Data
- Radio Authentication
- Tone Paging
- ARC4 Encryption Option

1. Multi Digital Protocol can be used for two(2) of the three(3) Digital Protocols set by programming software. P25/DMR Digital Protocols are options.

OPTIONAL FEATURES

■ GENERAL FEATURES

- 4000 Channel (KWD-5000CH)
- Front Panel Programming (KWD-5001FP)
- microSD/microSDHC Memory Card Slot (KWD-5002SD)
- Built-in Bluetooth® Module for Data (KWD-5003BT)
- Remote Control Commands by Subscriber Units (KWD-5007RC)
- 256-bit AES Encryption (KWD-AE30K/31K Encryption Module required)
- Battery Management Solution (KSC-Y32K Charger & KAS-12K Software License Key required)

■ DIGITAL – P25 MODE

- Conventional Features (KWD-5100CV)
- Phase 1 Trunking Features (KWD-5100CV & 5101TR)
- Phase 2 Trunking Features (KWD-5100CV & 5101TR & 5102TR)
- Conventional OTAR (KWD-5103RK)
- Trunking OTAR (KWD-5103RK & 5106DT)
- Conventional Voting Scan (KWD-5105VT)
- Packet Data required for Trunked OTAR/GPS/OTAP (KWD-5106DT)
- P25 ARC4 Encryption (KWD-5107EE)
- Link Layer Authentication (KWD-5100CV & KWD-5101TR & KWD-AE3x Encryption Board Required)
- One active key per system, up to 32 systems

■ DIGITAL – DMR MODE

- DMR Tier 2 Conventional Features (KWD-5300CV)
- DMR Tier 3 Trunking Features (KWD-5300CV & KWD-5301TR)

■ DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking (only in 800MHz)
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Paging Call
- Emergency Call
- All Group Call
- Digital Two-Tone
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

■ DIGITAL – DMR MODE

- DMR Tier 2 Conventional Option
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Optional
- Site Roaming

■ ANALOG MODE

- NPSPAC Channels
- Conventional Zones
- LTR® Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)

	NX-5400 700/800MHz Digital & FM Analog Portable Radio	Table of Contents
---	---	--

RADIO		LIST
NX-5400K2	700 / 800 MHz, 3.0 Watts NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking Standard Key Model	1094.50
NX-5400K3	700 / 800 MHz, 3.0 Watts NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking Full Key Model	1162.00

CSA US APPROVED MODELS		LIST
Must Order L-5039 & "KNB-LS5CU or KNB-LS7M" Intrinsically Safe Battery per radio <i>*Note: microSD card is not allowed to use as Intrinsically Safe Option.</i>		
NX-5400-ISCK2	700 / 800 MHz, 3.0 Watts NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking Standard Key Model	1094.50
NX-5400-ISCK3	700 / 800 MHz, 3.0 Watts NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking Full Key Model	1162.00

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

General Radio Features		LIST
KWD-5000CH	License Key for 4000 Channel Expansion	499.00
KWD-5001FP	License Key for Front Panel Programming	356.30
KWD-5002SD	License Key for microSD Memory Card Slot Activation	124.70
KWD-5003BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-5003BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-5007RC	License Key for Remote Control by Subscriber Units Note: - P25 Mode is <u>NOT</u> available. - This license may be used by Administrator due to Stun/Revive/Kill. - The license is required for only Transmitting of Remote Control. - PC command for Remote Control does <u>NOT</u> require the license.	47.50

P25 Radio Features		LIST
KWD-5100CV	License Key for P25 Conventional	683.20
KWD-5101TR	License Key for P25 Phase 1 Trunking (requires KWD-5100CV) Note: Required for Link Layer Authentication	617.80
KWD-5102TR	License Key for P25 Phase 2 Trunking (requires KWD-5100CV & KWD-5101TR)	475.20
KWD-5103RK	License Key for P25 OTAR (requires KWD-5106DT for a Trunking Operation)	831.70
KWD-5105VT	License Key for P25 Conventional Voting Scan	142.70
KWD-5106DT	License Key for P25 Trunking OTAR / GPS / OTAP Note: Conventional (OTAR/GPS/OTAP) does NOT require KWD-5106DT.	213.80
KWD-5107EE	License Key for P25 ARC4 Enhanced Encryption	NC

DMR Radio Features		LIST
KWD-5300CV	License Key for DMR Tier 2 Conventional	71.30
KWD-5301TR	License Key for DMR Tier 3 Trunking (requires KWD-5300CV)	158.30
KWD-5500EE	License Key for DMR ARC4 Enhanced Encryption	47.50

ANTENNAS		LIST
KRA-32K	700/800 MHz Whip Antenna	46.80
KRA-36	700/800 MHz Stubby Antenna	33.50

	NX-5400 700/800MHz Digital & FM Analog Portable Radio	Table of Contents
---	---	--

BATTERIES AND CHARGERS	LIST
------------------------	------

***All of batteries listed below except KBP-10 is compatible with IP67/68 when it is used with a radio.**

KNB-L1M	Li-ion 2000mAh (Compact Slim)	158.30
KNB-L2M	Li-ion 2600mAh (Standard)	185.80
KNB-L11M	Li-ion 3900mAh (High Capacity)	240.50
	Note: The KNB-L11 battery requires NX-5x00 firmware 5.12 or newer	
KNB-L12M	Laminated Li-ion 3000mAh (High Capacity)	210.00
KNB-L13M	Laminated Li-ion 4000mAh (High Capacity)	266.00
KNB-LS5CU	CSA US Intrinsically Safe Battery Li-ion 2000mAh	280.00
	Note: Due to the I.S. circuitry on the KNB-LS5CU, the cells may lose charge during storage. To prevent loss of capacity during storage, charge the battery for 10 minutes at least every 4 months with the KSC-32, KSC-Y32K, KSC-52BK, KSC-326K, KSC-326AK or KSC-526K. [Intrinsically Safe Option]	
KNB-LS7M	CSA US Intrinsically Safe Battery Li-ion 3800mAh	402.70
	Note: Due to the I.S. circuitry on the KNB-LS7M, the cells may lose charge during storage. To prevent loss of capacity during storage, charge the battery for 10 minutes at least every 4 months with the KSC-32, KSC-Y32K, KSC-52BK, KSC-326K, KSC-326AK or KSC-526K. [Intrinsically Safe Option]	
KBP-10	AA Alkaline Refillable Battery Pack (12 AA: 9V). Cells not included.	157.50
	Note: The color of the case is Orange.	

Single Unit Desk Chargers	
---------------------------	--

KSC-52BK	Rapid rate single unit charger for KNB-L1/KNB-L2/KNB-L3/KNB-LS5/KNB-LS7/KNB-33L/PB-45L/KNB-47L/KNB-48L/KNB-72LC/KNB-70LEX/KNB-41NC/KNB-50NC/KNB-54N	107.00
KSC-52AK	Rapid rate single unit charger for the KNB-L11/L12/L13 high capacity battery	107.00

6 Unit Chargers	
-----------------	--

KSC-526K	Rapid rate 6-unit charger CEC Compliant Note: Requires charging pocket KSC-52PBW and/or KSC-52PCW, and/or KSC-52PAW	906.20
KSC-52PBW	Charging pocket for KSC-526K and/or to convert the pocket style of a KSC-52 Single unit charger compatible with the KNB-L1, L2, L3, LS5 and LS7 batteries, and NX-205/305 and NX-210 series	12.00
KSC-52PAW	Charging pocket for KSC-526K and/or to convert the pocket style of a KSC-52 Single unit charger compatible with the KNB-L11/L12/L13 battery	12.00
KMB-526K	Wall Mount Bracket for KSC-526K	91.50

Vehicle Chargers/Adapters	
---------------------------	--

KVC-52	Rapid rate DC vehicular charger adapter for the KSC-52BK/52AK chargers (chargers not included; includes steel mounting base & locking bracket, and DC cable with a fused cigarette lighter plug)	208.30
KVC-23A	Rapid rate DC vehicular charger for TK-5x10/5x20, NX-5x00/x00/x10/x20, TK-x180, TK-x170, & TK-x360 portables with Lithium Ion /Lithium Polymer/NiMH packs only. Note: Compatible with KNB-L11 battery	402.70

CARRYING ACCESSORIES	LIST
----------------------	------

KBH-11	Spring action belt clip (2.5")	19.70
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-6SW	Leather swivel belt loop / detachable swivel D-Ring back	29.50
KLH-137ST	Firemen's Heavy-Duty Leather Shoulder Strap for a Heavy-Duty Leather Case	49.30
KLH-200K3	Heavy duty leather carrying case for NX-5000 series with KNB-L1/L2/L3/LS5CU (for both keypad models)	59.20
KLH-201K3	Nylon carrying case for NX-5000-series with KNB-L1/L2/L3/LS5CU (for both keypad models)	35.20
KW9170-LF	Heavy Duty Leather Carrying Case for NX-5x00 portables with KBP-10, Non-swivel, D-rings	90.00

 NX-5400 700/800MHz Digital & FM Analog Portable Radio Table of Contents	
SPECIAL COLOR HOUSING	
	LIST
KWD-YH-5000 Yellow Housing Kit for NX-5000 series Portables (Standard Key Model K2/K5 Only) Order L-5024 for Factory Install. (Eligible for warranty of IP67/68 immersion / Intrinsically Safe Option must be installed by Kenwood.) Note: If you order only housing and perform Dealer Installation, IP67/68 Warranty Claim will not be eligible.	53.70
MICROPHONES & AUDIO ACCESSORIES	
*IP grades for microphones and audio accessories are decided by each item.	
	LIST
KMC-70M MIL-SPEC, IP54/55/67/68* Speaker Mic with Active Noise Reduction Note: IP68 is available only when used with NX-5000 series portable [Intrinsically Safe Option]	174.20
KMC-72W MIL-SPEC, IP54/55/67 Noise-cancelling Speaker Mic [Intrinsically Safe Option]	133.80
KMC-49 MIL-SPEC, Speaker Mic. with Antenna Connector Note: 5/16" Coax cable hex wrench included (antenna is not included). [Intrinsically Safe Option]	495.00
KEP-1 3.5mm earphone kit for KMC-41/42W/54W/70M/72W Speaker Mics [Intrinsically Safe Option]	74.50
KEP-2 2.5mm earphone kit for KMC-49 Speaker Mic [Intrinsically Safe Option]	74.50
KCT-51 Hirose 6-pin Adapter (adapts KVL/aftermarket audio acc. to portable connector) [Intrinsically Safe Option]	306.70
KHS-11BL 2-wire palm mic w/earphone, universal connector (Black) [Intrinsically Safe Option]	223.20
KHS-12BL 3-wire mini lapel mic w/earphone, universal connector (Black) Note: NOT compatible with TDMA operations [Intrinsically Safe Option]	283.70
KHS-14C Lt. Wt. Single muff headset w/boom mic & In-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	155.80
KHS-15DC-BH Hvy-duty behind-the-headset w/boom mic & earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	611.00
KHS-15D-OH Hvy-duty noise reduction over-the-headset w/noise cancelling boom mic & PTT [Intrinsically Safe Option]	522.80
Sensear Bluetooth® Headsets Non-IS Models (SENS® Technology)	
SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB 775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB 775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB 775.00
Sensear Bluetooth® Headsets IS Rated Models (SENS® Technology)	
SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB 940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB 940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB 940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB 1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB 1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB 1150.00
*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety: IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4 -20°C to +40°C, T3C -20°C to +50°C	
ENCRYPTION & OPTION MODULES	
	LIST
KWD-AE30K AES FIPS140-2 Level 1 & DES Encryption Module (Multi-Key) Order a Labor Code L-5003 if installation is required. (Eligible for warranty of IP67/68 immersion / Intrinsically Safe Option must be installed by Kenwood. If you order only a Module and perform Dealer Installation, IP67/68 Warranty Claim will not be eligible.) KWD-AE30K requires: a Motorola KVL3000 Plus/4000 key loader device. KWD-AE30K is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1). Note: Required for Link Layer Authentication [Intrinsically Safe Option]- Must be Kenwood installed for I.S.	1137.30

 NX-5400 700/800MHz Digital & FM Analog Portable Radio		Table of Contents
KWD-AE31K	AES & DES Encryption Module (Multi-Key) Order a Labor Code L-5004 if installation is required. (Eligible for warranty of IP67/68 immersion / Intrinsically Safe Option must be installed by Kenwood. If you order only a Module and perform Dealer Installation, IP67/68 Warranty Claim will not be eligible.) Note: Requires KPG-AE1/DE1 software key loader or Motorola KVL3000 Plus/4000 key loader device. KWD-AE31K is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Note: Required for Link Layer Authentication [Intrinsically Safe Option]- Must be Kenwood installed for I.S.	737.20
KCT-48VU	External Vibration Unit Note: Audio accessories cannot be used when this option installed. KCT-48VU does not support the P25 digital mode calling or paging features [Intrinsically Safe Option]	114.00
KPG-AE1K	AES/DES Encryption Software Key Loader for KWD-AE31K Authentication by KPT-300LMC is required Note: KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A)	649.10
KPG-DE1K	DES Encryption Software Key Loader for KWD-AE31K Authentication by KPT-300LMC is required	436.50
SERVICE RELATED ACCESSORIES		LIST
KPG-D1NK	License Key for KPG-D1NK Programming Software for NX-5000 Portable/Mobile (Windows® Vista/7/8/8.1/10) Note: Requires KPT-300LMC for authentication P25 Trunked Programming Capability: USB Key Type: Advanced System Key (ASK)- See KWD-ASK-MK and AK • For NX-5000 series radios. • KWD-ASK-MK (Master Key): For trunked system operator (SYSOP). Required for activating KWD-ASK-AK Access keys. Securely embeds/encrypts the HSID. • KWD-ASK-AK (Access Key): For Dealers/contractors. Activated by KWD-ASK-MK Master Key. • KPG-D1NK supports up to 16 KWD-ASK-AK Access Keys (16 trunked networks).	184.00
KPG-36XM	Full Speed USB Programming interface cable Note: This cable with USB mode may be used for SD Card Direct Access.	212.30
KPG-93	Encryption Key Loader Interface Cable for Motorola KVL-3000/3000 Plus/4000	374.20
KPG-93AUT	KVL-4000 Radio Authentication Cable Note: Only capable for P25 Radio Authentication. Not available for Encryption Key Loading.	469.50
KWD-ASK-AK	Access Key for KPG-D1NK P25 trunked programming Notes: Enables P25 Trunked system programming privileges in a KPG-D1NK. • For NX-5000 series only • Must be activated by trunked system operator (SYSOP) with KWD-ASK-MK Master Key • Must have KPG-D1NK • Configurable expiration period of KWD-ASK-AK set by KWD-ASK-MK is available for 3 years for built in battery. USB Key must be replaced since the expiration set up dose not work after 3 years.	280.00
KWD-ASK-MK	Master Key for activating KWD-ASK-AK Access Keys - Restricted Purchase Requirements - Notes: • For NX-5000 series only. • Sold to trunked system operator (SYSOP) or SYSOP authorized entities only • Must have KPG-D1NK • SYSOP must provide 3-digit HEX HSID to Kenwood with P25 Trunking System Keys Request Form placed on Kenwood Tools. • Purchase KWD-ASK-AK Access Keys if needed.	668.50
OPTIONAL CABLE FOR FOREST/FIRE SERVICES FEATURE SET (FSFS) OPTION		
KPG-CLN-14P	Portable-to-Portable Cloning Cable (14P:14P), 1m	301.80

	NX-5400 700/800MHz Digital & FM Analog Portable Radio	Table of Contents
---	---	-----------------------------------

INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) <u>Note:</u> Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-5002	NX-5200/5300/5400 Programming (with basic TX/RX check) Must submit <u>NX-x000 Series Programming Order Form</u> upon placing order for any programming services.	40.50
L-5003	Install KWD-AE30K in NX-5000 series Portable (Must purchase module separately)	81.00
L-5004	Install KWD-AE31K in NX-5000 series Portable (Must purchase module separately)	81.00
L-5005	KPG-D1NK System Key File (SKF) <u>Note:</u> Enables P25 Trunked system programming privileges in a KPG-D1NK. - Restricted Purchase Requirements - • Trunked system operator (SYSOP) must provide 3-digit HEX HSID to Kenwood with P25 Trunking System Keys Request Form placed on Kenwood Tools. • Must have KPG-D1NK. • Kenwood ships an encrypted *.SKF file via E-Mail to the address provided on the P25 Trunking System Keys Request Form placed on Kenwood Tools. • Non-SYSOP entities ordering L-5005 must provide verifiable written authorization from SYSOP to receive an *.SKF file. • 3-digit HEX HSID are securely encrypted & embedded in the *.SKF file.	142.20
L-5024	Assemble Yellow Housing KWD-YH-5000 with NX-5000 series Portable	28.80
L-5039	Configure NX-5200/5300/5400 for CSA US Intrinsically Safe Must order KNB-LS5CU or KNB-LS7M I.S. battery	36.00
L-5051	P25 CAP Compliance of Non-Encrypted Radio - Disable Built-in DES	54.00
L-5077	FSFS++ Forest Service Feature Set - Factory Installation Adds Tactical Zone improvements and Analog Conv & P25 Conv Zone Cloning <u>Note:</u> Must purchase <u>per Radio</u> • This feature set is provided by custom firmware based on V4.21.00 firmware. • Feature set is applicable for analog conventional / P25 conventional modes only. • Feature set does not support mobile multi-deck configuration. • Feature set will not work with any other firmware options or customized firmware. • Custom firmware is not eligible for warranty compensation.	64.80
L-1849	FSFS++ Forest Service Feature Set - Field Installation Adds Tactical Zone improvements and Analog Conv & P25 Conv Zone Cloning <u>Note:</u> Purchase per application - <u>provided as Custom FW for unlimited radios</u> <u>To PLACE AN ORDER,</u> submit "Kenwood LMR Customization Application" form along with your PO via email (lmr-customs@us.jvckenwood.com) • This feature set is provided as custom firmware based on V4.21.00 firmware. • Feature set is applicable for analog conventional / P25 conventional modes only. • Feature set does not support Mobile multi-deck configuration. • Feature set will not work with any other firmware options or customized firmware. • Custom firmware is not eligible for warranty compensation.	1512.00

-- IMPORTANT NOTES regarding ENCRYPTION MODULES--

Encryption modules, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

Kenwood may request the following information to be submitted at time of order (this information must meet Kenwood internal approvals prior to shipment even if being returned to Kenwood later:
KWD-AE30 AES FIPS140-2 SCM , NIST Validation & Customer Shipping

A secure delivery method direct to the end user customer is required by the NIST AES FIPS 140-2 validation rules. For U.S. Federal Government entities the SCM must ship from Kenwood USA Corporation directly to the end user customer by a trusted carrier (FEDEX, UPS or a designated Kenwood USA Corporation employee); shipping/handling by a dealer or other entity is not acceptable. This may or may not be required by local/state government agencies or business/industrial users. Please check with the end use customer about their AES encryption handling requirements before ordering. Kenwood will not be responsible for shipments of KWD-AE30K modules to erroneous destinations specified on an order.



NX-3200/3300

VHF/UHF Digital & FM Analog Portable Radios

Table of Contents



Basic Standard Key Full Key

All NX-3000 series portables include:

- Belt Clip (KBH-11)
- Accessory Cover
- Channel Stopper
- User Guide
- Premium Warranty: 3 Years*

All Accessories / options: 1 Year

Purchase Battery, Charger, Antenna separately

*Note:

1. To meet IP grades and MIL, the universal connector cap or KENWOOD official accessory must be installed/connected.
2. To maintain immersion specs (IP67), all warranty service must be done by National Kenwood Authorized Service Centers. IP67 Certification is valid under the 3 year premium warranty. No re-certification is available.

Because of spurious signal (birdie), the following frequencies (and ± 7.5 kHz ranges) are not allowed:

- | | | |
|------------|------------|------------|
| • 139.2000 | • 403.2000 | • 460.8000 |
| • 144.0000 | • 408.0000 | • 465.6000 |
| • 148.8000 | • 412.8000 | • 470.4000 |
| • 153.6000 | • 417.6000 | • 475.2000 |
| • 158.4000 | • 422.4000 | • 480.0000 |
| • 160.0000 | • 427.2000 | • 484.8000 |
| • 163.2000 | • 432.0000 | • 489.6000 |
| • 168.0000 | • 436.8000 | • 494.4000 |
| • 172.8000 | • 441.6000 | • 499.2000 |
| | • 446.4000 | • 504.0000 |
| | • 451.2000 | • 508.8000 |
| | • 456.0000 | • 513.6000 |
| | | • 518.4000 |

STANDARD

GENERAL FEATURES

- 5 W (136-174 MHz) Models
- 5 W (400-520 MHz) Models
- 512 CH-GID / 128 Zones
- 64 CH-GID / 4 Zones (For Basic Models)
- Basic Models (w/o LCD and keypad)
- Standard Keypad Models (w/ LCD and D-pad/4key)
- Full Keypad Models (w/ LCD and D-pad/12 key)
- 4-Line Basic Frame (2-Line Main/Sub-LCD, icon & key guide)
- 5-Line Text Message Frame (3 Lines of Text, icon & key guide)
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- 7-color Light Bar Indicator
- Transmit/Busy/Call Alert/Warn LED
- Remote Stun/Kill/Check
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 4-way Directional-pad (For Standard/Full Keypad)
- Emergency Key
- 2 Side PF Keys
- 1W Speaker Audio
- Dual Digital Protocol¹
- Emergency Call Features
- Built-in GPS Receiver / Antenna
- Built-in Bluetooth® 4.0 Module
- Built-in Motion Sensor
- Active Noise Reduction (ANR)
- KPG-D3N Windows® FPU
- Flash Firmware Upgrading
- Optional Software-based DES and AES . Encryptions (Digital Only)
- MIL-STD-810 C/D/E/F/G
- IP54/55² Water & Dust Intrusion
- IP67² Immersion
- Digital Encode/Decode Format
- Color Housing Option

1. Designed to operate digital, DMR OR NXDN, along with analog FM; a single FM digital protocol is selected with programming software.
2. Must equip **Accessory Cover** included with a Radio. Speaker Microphone does not cover IPs.

DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking Option
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Paging Call
- Emergency Call
- All Group Call
- Digital Two-Tone
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

DIGITAL – DMR MODE

- DMR Tier 2 Conventional
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Site Roaming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Option

ANALOG MODE

- Conventional Zones
- LTR® Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF
- Built-in Voice Inversion Scrambler

OPTIONAL FEATURES

- 1000 Channel (**KWD-3000CH**)
- Front Panel Programming (**KWD-3001FP**)
- Built-in Bluetooth® Module for Data (**KWD-3002BT**)
- Digital NXDN Trunking and Trunking 2.5 (**KWD-3501TR**)
- DMR Tier 2 Conventional (**Factory Installed**)
- DMR Tier 3 Trunking and Trunking 2.5 (**KWD-3302TR**)
- DMR ARC4 Enhanced Encryption (**KWD-3502EE**)
- AES/DES Encryption (**KWD-3503AE**)
- Remote Control Command by Subscriber Units (**KWD-3504RC**)

Approved by CSA-US International Inc. for Classes I, II & III, Div. 1, Groups C, D, E, F, G and are also approved for non-incendive use in Class I, Div. 2, Groups A, B hazardous locations.

RADIO		LIST
NX-3200K	VHF (136-174MHz), 5.0 Watts, 64 CH, Basic Model	781.20
NX-3200K2	VHF (136-174MHz), 5.0 Watts, 512 CH, Standard Key Model	847.70
NX-3200K3	VHF (136-174MHz), 5.0 Watts, 512 CH, Full Key Model	912.70
NX-3300K	UHF (400-520MHz), 5.0 Watts, 64 CH, Basic Model	781.20
NX-3300K2	UHF (400-520MHz), 5.0 Watts, 512 CH, Standard Key Model	847.70
NX-3300K3	UHF (400-520MHz), 5.0 Watts, 512 CH, Full Key Model	912.70

NX-3200/3300

VHF/UHF Digital & FM Analog Portable Radios

[Table of Contents](#)

Li-ion VALUE PACKAGES (Preferred for Trunked Mode Usage) LIST

NX-3200K2-XLKVP	VHF Extra-Cap Li-Ion Value Pack : NX-3200K2+KNB-78L(2860mAh)+KSC-25LSK+KRA-26M	1,110.60
NX-3300K2-XLKVP	UHF Extra-Cap Li-Ion Value Pack : NX-3300K2+KNB-78L(2860mAh)+KSC-25LSK+KRA-27M	1,110.60

Li-ion VALUE PACKAGES (Preferred for Conventional Mode Usage) LIST

NX-3200K2LAKVP	VHF Hi-Cap Li-Ion Value Pack : NX-3200K2+KNB-57LAM(2000mAh)+KSC-25LSK+KRA-26M	1,067.90
NX-3300K2LAKVP	UHF Hi-Cap Li-Ion Value Pack : NX-3300K2+KNB-57LAM(2000mAh)+KSC-25LSK+KRA-27M	1,067.90
NX-3200K2SLAKVP	VHF Li-Ion Value Pack : NX-3200K2+KNB-55LAM(1480mAh)+KSC-25LSK+KRA-26M	1,019.10
NX-3300K2SLAKVP	UHF Li-Ion Value Pack : NX-3300K2+KNB-55LAM(1480mAh)+KSC-25LSK+KRA-27M	1,019.10

CSA US APPROVED MODELS LIST

Must Order L-5062 & KNB-79LCM Intrinsically Safe Battery per radio

NX-3200-ISCK	VHF (136-174MHz), 5.0 Watts, 64 CH, Basic Model	781.20
NX-3200-ISCK2	VHF (136-174MHz), 5.0 Watts, 512 CH, Standard Key Model	847.70
NX-3200-ISCK3	VHF (136-174MHz), 5.0 Watts, 512 CH, Full Key Model	912.70
NX-3300-ISCK	UHF (400-520MHz), 5.0 Watts, 64 CH, Basic Model	781.20
NX-3300-ISCK2	UHF (400-520MHz), 5.0 Watts, 512 CH, Standard Key Model	847.70
NX-3300-ISCK3	UHF (400-520MHz), 5.0 Watts, 512 CH, Full Key Model	912.70

Note: KNB-68LC is NOT compatible for NX-3000 Intrinsically Safe usage.

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features	LIST
KWD-3000CH	License Key for 1000 Channel Expansion 190.20
KWD-3001FP	License Key for Front Panel Programming 148.50
KWD-3002BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-3002BT. You can pair with any Bluetooth audio device without this option. 41.70
KWD-3302TR	License Key for DMR Tier 3 Trunking 118.80
KWD-3501TR	License Key for Digital Trunking (Includes NXDN Type-C and Type-C Gen2, and Trunking 2.5) 49.50
KWD-3502EE	License Key for DMR ARC4 Enhanced Encryption 47.50
KWD-3503AE	License Key for AES/DES Encryption Note: 1. Factory Installation only. Must order L-5054. 2. Requires KPG-AE1/DE1 software key loader to encrypt. 3. KWD-3503AE is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Please see descriptions at the bottom. 534.70
KWD-3504RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license. 47.50
KWD-3505DE	License Key for DES Encryption Note: Requires KPG-AE1/DE1 software key loader to load encryption keys 118.80



NX-3200/3300

VHF/UHF Digital & FM Analog Portable Radios

Table of Contents

ANTENNAS		LIST
KRA-22M	VHF Low-profile helical antenna 148-162 MHz	22.00
KRA-22M2	VHF Low -profile helical antenna 162-174 MHz	22.00
ANTENNAS CONT		LIST
KRA-22M3	VHF Low-profile helical antenna 136-150 MHz	22.00
KRA-23M	UHF Low-profile helical antenna 450-490 MHz	22.00
KRA-23M2	UHF Low-profile helical antenna 470-520 MHz	22.00
KRA-23M3	UHF Low-profile helical antenna 403-430 MHz	22.00
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00
KRA-27M3	UHF whip antenna 400-450 MHz	22.00
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30
KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-42M3	UHF stubby antenna 403-430 MHz	18.30
KRA-25	High gain VHF helically loaded whip antenna 148-162 MHz	46.00
KRA-28	Broad-band VHF helically loaded whip antenna 140-170 MHz	56.30
BATTERIES AND CHARGERS		LIST
KNB-78LM	2860 mAh, Li-ion battery, IP67, battery only, best for trunked mode operation	176.20
KNB-57LAM	2000 mAh, Li-ion battery, IP67, battery only, best for conventional mode operation	133.50
KNB-55LAM	1480 mAh, Li-ion battery, IP67, battery only	84.70
KNB-56N	1400 mAh, Ni-MH battery, IP67, battery only	107.00
KNB-79LCM	CSA US Intrinsically Safe Battery Li-ion 2860mAh, IP67, battery only [Intrinsically Safe Option]	216.70
KBP-5	AA Alkaline Refillable Battery Pack (6 AA; 9V) cells not included	72.20
Single Unit Desk Chargers		
KSC-25LSK	100~240 volt rapid rate single unit charger for KNB-40LC(V)/55L/57L/68LC/78LM/79LCM Li-ion Battery	64.70
KSC-25SK	110 volt Rapid rate single unit charger for KNB-26N/40LC(V)/55L/56N/57L/68LC/78LM/79LCM	83.20
6 Unit Chargers		
KMB-16	Six Unit Charger Adapter for the KSC-16/20/24/25/25L chargers (chargers not included)	249.50
KMB-23	Six Unit Charger Adapter for the KSC-16/20/24/25/25L/32 chargers (chargers not included)	381.30
KSC-526K	Rapid rate 6-unit charger CEC Compliant Note: Requires charging pocket KSC-52PBW and/or KSC-52PCW, and/or KSC-52PAW	906.20
KSC-52PCW	Charging pocket for KSC-526K compatible with NX-3000 series	12.00
KMB-526K	Wall Mount Bracket for KSC-526K	91.50
Vehicle Chargers/Adapters		
KVC-4	Vehicular charger adapter for the KSC-16/18/20/24/25SK chargers (chargers not included) *KSC-25LSK is not compatible with KVC-4.	156.20
KVC-23A	Rapid rate DC vehicular charger for TK-5x10/5x20, NX-5x00/NX-3x00/x00/x10/x20, TK-x180, TK-x170, & TK-x360 portables with Lithium Ion /Lithium Polymer/NiMH packs only. Note: Compatible with KNB-L11 battery	402.70



NX-3200/3300

Table of Contents

VHF/UHF Digital & FM Analog Portable Radios

CARRYING ACCESSORIES		LIST
KBH-11	Spring action belt clip (2.5")	19.70
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-206K	Heavy-Duty Leather Case w/Swivel Belt Loop for Basic Model	65.50
KLH-206K2	Heavy-Duty Leather Case w/Swivel Belt Loop for Standard Keypad Model	65.50
KLH-206K3	Heavy-Duty Leather Case w/Swivel Belt Loop for Full Keypad Model	65.50
KLH-207K	Nylon carrying case for Basic Model	35.20
KLH-207K2	Nylon carrying case for Standard Keypad Model	35.20
KLH-207K3	Nylon carrying case for Full Keypad Model	35.20

SPECIAL COLOR HOUSING		LIST
KWD-YH-3000U	High Visibility Green Housing Kit for NX-3x00 series Standard Key Portables Must order L-5068 for Factory Install. Eligible for warranty of IP67 immersion only when factory installed with L-5068. Note: If you order only housing and perform Dealer Installation, IP67 Warranty Claim will not be eligible. Note: Coloring of housing changed to High Visibility Green after Nov 2021 production. Original yellow is no longer available.	53.70

MICROPHONES & AUDIO ACCESSORIES		LIST
*IP grades for microphones and audio accessories are decided by each item.		
KMC-40	MIL-SPEC, Speaker Mic. with Antenna Connector Note: 5/16" Coax cable hex wrench included (antenna is not included). [Intrinsically Safe Option]	495.00
KMC-70M	MIL-SPEC, IP54/55/67/68* Speaker Mic with Active Noise Reduction Note: IP68 is available only when used with NX-5000 series portable [Intrinsically Safe Option]	174.20
KMC-72W	MIL-SPEC, IP54/55/67 Noise-cancelling Speaker Mic [Intrinsically Safe Option]	133.80
KEP-1	3.5mm earphone kit for KMC-41/42W/54W/70M/72W Speaker Mics [Intrinsically Safe Option]	74.50
KHS-11BL	2-wire palm mic w/earphone, universal connector (Black) [Intrinsically Safe Option]	223.20
KHS-12BL	3-wire mini lapel mic w/earphone, universal connector (Black) Note: Not compatible with TDMA operations [Intrinsically Safe Option]	283.70
KHS-14C	Lt. Wt. Single muff headset w/boom mic & In-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	155.80
KHS-15DC-BH	Hvy-duty behind-the-headset w/boom mic & earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	611.00
KHS-15D-OH	Hvy-duty noise reduction over-the-headset w/noise cancelling boom mic & PTT [Intrinsically Safe Option]	522.80

Sensear Bluetooth® Headsets Non-IS Models (SENSE® Technology)		
SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB	775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	775.00

Sensear Bluetooth® Headsets IS Rated Models (SENSE® Technology)		
SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB	940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB	1150.00

*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety:

IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4
-20°C to +40°C, T3C -20°C to +50°C

OPTION MODULES		LIST
KCT-48VU	External Vibration Unit Note: Audio accessories cannot be used when this option installed.	114.00



NX-3200/3300

VHF/UHF Digital & FM Analog Portable Radios

[Table of Contents](#)

SERVICE RELATED ACCESSORIES		LIST
KPG-D3NK	License Key for KPG-D3NK Programming Software for NX-3000 Portable/Mobile Note: Requires KPT-300LMC for authentication	184.00
KPG-AE1K	License Key for AES/DES Encryption Software Key Loader for KWD-3503AE Note: - Requires KPT-300LMC for authentication - KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A).	649.10
KPG-DE1K	License Key for DES Encryption Software Key Loader for KWD-3505DE Note: - Requires KPT-300LMC for authentication	436.50
KPG-36XM	Full Speed USB Programming interface cable	212.30
INSTALLATION / TUNING CHARGES		LIST
L-836	Assemble KMB-16 with six KSC-25/25L	16.20
L-961	Assemble KMB-23 with six KSC-24/25/25L/32 (Rapid Rate, 120 Volt versions only)	18.00
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. <u>KPT-300LMC's History Menu will not display the Radio Features activated by Factory.</u>	129.70
L-5052	NX-3000 Series Portables Programming (with basic TX/RX check) Must submit NX-x000 Series Programming Order Form upon placing order for any programming services.	40.50
L-5054	Installation AES/DES for NX-3000 Portable/Mobile	27.00
L-5062	Configure NX-3000 series for CSA US Intrinsically Safe Note: NX-3000 series I.S. radios must be used with matching I.S. battery KNB-79LCM.	36.00
L-5068	Assemble Color Housing KWD-YH-3000U/P with NX-3000 series Portable	28.80

-- IMPORTANT NOTES regarding ENCRYPTION SOFTWARE OPTION--

Encryption Software Option, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

JVCKENWOOD may request the following information to be submitted at time of order (this information must meet JVCKENWOOD internal approvals prior to shipment even if being returned to JVCKENWOOD later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination
(customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

c) Intended Use of Radios: Law enforcement, security, operations, etc.



NX-3400

800/900MHz Digital & FM Analog Portable Radio

Table of Contents



All NX-3000 series portables include:

- Belt Clip (KBH-11)
- Antenna (KRA-38K)
- Accessory Cover
- Channel Stopper
- User Guide
- Premium Warranty: 3 Years*

All Accessories / options: 1 Year

Purchase Battery and Charger separately

*Note:

1. To meet IP grades and MIL, the universal connector cap or KENWOOD official accessory must be installed/connected.
2. To maintain immersion specs (IP67), all warranty service must be done by National Kenwood Authorized Service Centers. IP67 Certification is valid under the 3 year premium warranty. No re-certification is available.

Because of spurious signal (birdie), the following frequencies (and $\pm 6.25\text{kHz}$ ranges) are not allowed:

- 854.4000 • 936.0000
- 859.2000 • 940.8000
- 864.0000
- 868.8000

STANDARD

■ GENERAL FEATURES

- 3 W (806-941 MHz) Model
- 512 CH-GID / 128 Zones
- Full Keypad Model (w/ LCD and D-pad/12 key)
- 4-Line Basic Frame (2-Line Main/Sub-LCD, icon & key guide)
- 5-Line Text Message Frame (3 Lines of Text, icon & key guide)
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- 7-color Light Bar Indicator
- Transmit/Busy/Call Alert/Warn LED
- Remote Stun/Kill/Check
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 4-way Directional-pad (For Standard/Full Keypad)
- Emergency Key
- 2 Side PF Keys
- 1W Speaker Audio
- Dual Digital Protocol¹
- Emergency Call Features
- Built-in GPS Receiver / Antenna
- Built-in Bluetooth® 4.0 Module
- Built-in Motion Sensor
- Active Noise Reduction (ANR)
- KPG-D3N Windows® FPU
- Flash Firmware Upgrading
- Optional Software-based DES and AES . Encryptions (Digital Only)
- MIL-STD-810 C/D/E/F/G
- IP54/55² Water & Dust Intrusion
- IP67² Immersion
- Digital Encode/Decode Format

1. Designed to operate digital, DMR OR NXDN, along with analog FM; a single FM digital protocol is selected with programming software.

2. Must equip Accessory Cover included with a Radio. Speaker Microphone does not cover IPs.

■ DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Paging Call
- Emergency Call
- All Group Call
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

■ DIGITAL – DMR MODE

- DMR Tier 2 Conventional Option
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Site Roaming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Option

■ ANALOG MODE

- Conventional Zones
- LTR® Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF

OPTIONAL FEATURES

- 1000 Channel (**KWD-3000CH**)
- Front Panel Programming (**KWD-3001FP**)
- Built-in Bluetooth® Module for Data (**KWD-3002BT**)
- Digital NXDN Trunking (**Factory Installed**)
- DMR Tier 2 Conventional (**KWD-3301CV**)
- DMR Tier 3 Trunking (**KWD-3301CV & KWD-3302TR**)
- DMR ARC4 Enhanced Encryption (**KWD-3502EE**)
- AES/DES Encryption (**KWD-3503AE**)
- Remote Control Command by Subscriber Units (**KWD-3504RC**)

Approved by CSA-us International Inc. for Classes I, II & III, Div. 1, Groups C, D, E, F, G and are also approved for non-Incendive use in Class I, Div. 2, Groups A, B hazardous locations.

RADIO		LIST
NX-3400K3	800/900MHz, 3.0 Watts, 512 CH, Full Key Model, NXDN Conv & Trunking	1121.80
Li-ion VALUE PACKAGES (Preferred for Trunked Mode Usage)		LIST
NX-3400K3-XLKVP	Extra-Cap Li-Ion Value Pack : NX-3400K3+KNB-78L(2860mAh)+KSC-25LSK	1362.70



NX-3400

800/900MHz Digital & FM Analog Portable Radio

Table of Contents

CSA US APPROVED MODELS

LIST

Must Order L-5062 & KNB-79LCM Intrinsically Safe Battery per radio

NX-3400-ISCK3	800/900MHz, 3.0 Watts, 512 CH, Full Key Model, NXDN Conv & Trunking	1121.80
---------------	---	---------

Note: KNB-68LC is NOT compatible for NX-3000 Intrinsically Safe usage.

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- **FPU & Software Applications:** Software License Key Request Form
- **Radio Feature Licenses:** Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features		LIST
KWD-3000CH	License Key for 1000 Channel Expansion	190.20
KWD-3001FP	License Key for Front Panel Programming	148.50
KWD-3002BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-3002BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-3301CV	License Key for DMR Tier 2 Conventional	49.50
KWD-3302TR	License Key for DMR Tier 3 Trunking (Requires KWD-3301CV)	118.80
KWD-3502EE	License Key for DMR ARC4 Enhanced Encryption	47.50
KWD-3503AE	License Key for AES/DES Encryption Note: 1. Factory Installation only. Must order L-5054. 2. Requires KPG-AE1/DE1 software key loader to encrypt. 3. KWD-3503AE is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Please see descriptions at the bottom.	534.70
KWD-3504RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	47.50
KWD-3505DE	License Key for DES Encryption Note: Requires KPG-AE1/DE1 software key loader to load encryption keys	118.80

ANTENNAS

LIST

KRA-32K	700/800 MHz Whip Antenna	46.80
KRA-36	700/800 MHz Stubby Antenna	33.50
KRA-38K	800/900 MHz Whip Antenna	46.80
KRA-39	900 MHz Stubby Antenna	33.50

BATTERIES AND CHARGERS

LIST

KNB-78LM	2860 mAh, Li-ion battery, IP67, battery only, best for trunked mode operation	176.20
KNB-57LAM	2000 mAh, Li-ion battery, IP67, battery only, best for conventional mode operation	133.50
KNB-55LAM	1480 mAh, Li-ion battery, IP67, battery only	84.70
KNB-56N	1400 mAh, Ni-MH battery, IP67, battery only	107.00
KNB-79LCM	CSA US Intrinsically Safe Battery Li-ion 2860mAh, IP67, battery only [Intrinsically Safe Option]	216.70
KBP-5	AA Alkaline Refillable Battery Pack (6 AA; 9V) cells not included	72.20



NX-3400

800/900MHz Digital & FM Analog Portable Radio

[Table of Contents](#)

Single Unit Desk Chargers

KSC-25LSK	100~240 volt rapid rate single unit charger for KNB-40LC(V)/55L/57L/68LC/78LM/79LCM Li-ion Battery	64.70
KSC-25SK	110 volt Rapid rate single unit charger for KNB-26N/40LC(V)/55L/56N/57L/68LC/78LM/79LCM	83.20

6 Unit Chargers

KMB-16	Six Unit Charger Adapter for the KSC-16/20/24/25/25L chargers (chargers not included)	249.50
KMB-23	Six Unit Charger Adapter for the KSC-16/20/24/25/25L/32 chargers (chargers not included)	381.30
KSC-526K	Rapid rate 6-unit charger CEC Compliant Note: Requires charging pocket KSC-52PBW and/or KSC-52PCW, and/or KSC-52PAW	906.20
KSC-52PCW	Charging pocket for KSC-526K compatible with NX-3000 series	12.00
KMB-526K	Wall Mount Bracket for KSC-526K	91.50

Vehicle Chargers/Adapters

KVC-4	Vehicular charger adapter for the KSC-16/18/20/24/25SK chargers (chargers not included) *KSC-25LSK is not compatible with KVC-4.	156.20
KVC-23A	Rapid rate DC vehicular charger for TK-5x10/5x20, NX-5x00/NX-3x00/x00/x10/x20, TK-x180, TK-x170, & TK-x360 portables with Lithium Ion /Lithium Polymer/NiMH packs only. Note: Compatible with KNB-L11 battery	402.70

CARRYING ACCESSORIES

LIST

KBH-11	Spring action belt clip (2.5")	19.70
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-206K3	Heavy-Duty Leather Case w/Swivel Belt Loop for Full Keypad Model	65.50
KLH-207K3	Nylon carrying case for Full Keypad Model	35.20

MICROPHONES & AUDIO ACCESSORIES

LIST

***IP grades for microphones and audio accessories are decided by each item.**

KMC-40	MIL-SPEC, Speaker Mic. with Antenna Connector Note: 5/16" Coax cable hex wrench included (antenna is not included).	495.00
KMC-70M	MIL-SPEC, IP54/55/67/68* Speaker Mic with Active Noise Reduction Note: IP68 is available only when used with NX-5000 series portable [Intrinsically Safe Option]	174.20
KMC-72W	MIL-SPEC, IP54/55/67 Noise-cancelling Speaker Mic [Intrinsically Safe Option]	133.80
KEP-1	3.5mm earphone kit for KMC-41/42W/54W/70M/72W Speaker Mics [Intrinsically Safe Option]	74.50
KHS-11BL	2-wire palm mic w/earphone, universal connector (Black) [Intrinsically Safe Option]	223.20
KHS-12BL	3-wire mini lapel mic w/earphone, universal connector (Black) Note: Not compatible with TDMA operations [Intrinsically Safe Option]	283.70
KHS-14C	Lt. Wt. Single muff headset w/boom mic & In-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	155.80
KHS-15DC-BH	Hvy-duty behind-the-headset w/boom mic & earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	611.00
KHS-15D-OH	Hvy-duty noise reduction over-the-headset w/noise cancelling boom mic & PTT [Intrinsically Safe Option]	522.80



NX-3400

800/900MHz Digital & FM Analog Portable Radio

Table of Contents

Sensear Bluetooth® Headsets Non-IS Models (SENS® Technology)

SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB	775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	775.00

Sensear Bluetooth® Headsets IS Rated Models (SENS® Technology)

SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB	940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB	1150.00

*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety:

IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4 - 20°C to +40°C, T3C -20°C to +50°C

OPTION MODULES

		LIST
KCT-48VU	External Vibration Unit	114.00

Note: Audio accessories cannot be used when this option installed.

SERVICE RELATED ACCESSORIES

		LIST
KPG-D3NK	License Key for KPG-D3NK Programming Software for NX-3000 Portable/Mobile	184.00
	Note: Requires KPT-300LMC for authentication	
KPG-AE1K	License Key for AES/DES Encryption Software Key Loader for KWD-3503AE	649.10
	Note: - Requires KPT-300LMC for authentication - KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A).	
KPG-DE1K	License Key for DES Encryption Software Key Loader for KWD-3505DE	436.50
	Note: - Requires KPT-300LMC for authentication	
KPG-36XM	Full Speed USB Programming interface cable	212.30

INSTALLATION / TUNING CHARGES

		LIST
L-836	Assemble KMB-16 with six KSC-25/25L	16.20
L-961	Assemble KMB-23 with six KSC-24/25/25L/32 (Rapid Rate, 120 Volt versions only)	18.00
L-5001	Factory Activation of Radio Feature Licenses (per Radio)	129.70
	Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	
L-5052	NX-3000 Series Portables Programming (with basic TX/RX check)	40.50
	Must submit NX-x000 Series Programming Order Form upon placing order for any programming services.	
L-5054	Installation AES/DES for NX-3000 Portable/Mobile	27.00
L-5062	Configure NX-3000 series for CSA US Intrinsically Safe	36.00
	Note: NX-3000 series I.S. radios must be used with matching I.S. battery KNB-79LCM.	

-- IMPORTANT NOTES regarding ENCRYPTION SOFTWARE OPTION--



NX-3400

800/900MHz Digital & FM Analog Portable Radio

[Table of Contents](#)

Encryption Software Option, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

JVCKENWOOD may request the following information to be submitted at time of order (this information must meet JVCKENWOOD internal approvals prior to shipment even if being returned to JVCKENWOOD later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination

(customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

c) Intended Use of Radios: Law enforcement, security, operations, etc.



NX-3220/3320

Table of Contents

VHF/UHF Digital & FM Analog Portable Radios

STANDARD



Basic Standard Key Full Key

All NX-3000 series portables include:

- Belt Clip (KBH-11)
- 2-PIN Accessory Cover
- Channel Stopper
- User Guide
- Premium Warranty: 3 Years*

All Accessories / options: 1 Year

Purchase Battery, Charger, Antenna separately

Note:

1. To meet IP grades and MIL, the 2-pin connector cap must be installed.
2. To maintain immersion specs (IP67), all warranty service must be done by National Kenwood Authorized Service Centers. IP67 Certification is valid under the 3 year premium warranty. No re-certification is available.

Because of spurious signal (birdie), the following frequencies (and ± 7.5 kHz ranges) are not allowed:

- | | | |
|------------|------------|------------|
| • 139.2000 | • 403.2000 | • 460.8000 |
| • 144.0000 | • 408.0000 | • 465.6000 |
| • 148.8000 | • 412.8000 | • 470.4000 |
| • 153.6000 | • 417.6000 | • 475.2000 |
| • 158.4000 | • 422.4000 | • 480.0000 |
| • 160.0000 | • 427.2000 | • 484.8000 |
| • 163.2000 | • 432.0000 | • 489.6000 |
| • 168.0000 | • 436.8000 | • 494.4000 |
| • 172.8000 | • 441.6000 | • 499.2000 |
| | • 446.4000 | • 504.0000 |
| | • 451.2000 | • 508.8000 |
| | • 456.0000 | • 513.6000 |
| | | • 518.4000 |

GENERAL FEATURES

- 5 W (136-174 MHz) Models
- 5 W (400-520 MHz) Models
- 260 CH-GID / 128 Zones
- 64 CH-GID / 4 Zones (For Basic Models)
- Basic Models (w/o LCD and keypad)
- Standard Keypad Models (w/ LCD and D-pad/4key)
- Full Keypad Models (w/ LCD and D-pad/12 key)
- 4-Line Basic Frame (2-Line Main/Sub-LCD, icon & key guide)
- 5-Line Text Message Frame (3 Lines of Text, icon & key guide)
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- 7-color Light Bar Indicator
- Transmit/Busy/Call Alert/Warn LED
- Remote Stun/Kill/Check
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 4-way Directional-pad (For Standard/Full Keypad)
- Emergency Key
- 2 Side PF Keys
- 1W Speaker Audio
- Dual Digital Protocol¹
- Emergency Call Features
- Built-in GPS Receiver / Antenna
- Built-in Bluetooth® 4.0 Module
- Built-in Motion Sensor
- Active Noise Reduction (ANR)
- KPG-D3N Windows® FPU
- Flash Firmware Upgrading
- Optional Software-based DES and AES Encryptions (Digital Only)
- MIL-STD-810 C/D/E/F/G
- IP54/55² Water & Dust Intrusion
- IP67² Immersion
- Color Housing Option

1. Designed to operate digital, DMR OR NXDN, along with analog FM; a single FM digital protocol is selected with programming software.
2. Must equip **Accessory Cover** included with a Radio. Speaker Microphone does not cover IPs.

DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking Option
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Paging Call
- Emergency Call
- All Group Call
- Digital Two-Tone
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

DIGITAL – DMR MODE

- DMR Tier 2 Conventional
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Site Roaming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Option

ANALOG MODE

- Conventional Zones
- LTR® Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF

OPTIONAL FEATURES

- 1000 Channel (**KWD-3000CH**)
- Front Panel Programming (**KWD-3001FP**)
- Built-in Bluetooth® Module for Data (**KWD-3002BT**)
- Digital NXDN Trunking and Trunking 2.5 (**KWD-3501TR**)
- DMR Tier 2 Conventional (**Factory Installed**)
- DMR Tier 3 Trunking and Trunking 2.5 (**KWD-3302TR**)
- DMR ARC4 Enhanced Encryption (**KWD-3502EE**)
- AES/DES Encryption (**KWD-3503AE**)
- Remote Control Command by Subscriber Units (**KWD-3504RC**)

Approved by CSA-us International Inc. for Classes I, II & III, Div. 1, Groups D, E, F, G and are also approved for non-incendive use in Class I, Div. 2, Groups A, B, C hazardous locations.



NX-3220/3320

VHF/UHF Digital & FM Analog Portable Radios

[Table of Contents](#)

RADIO		LIST
NX-3220K	VHF (136-174MHz), 5.0 Watts, 64 CH, Basic Model	621.50
NX-3220K2	VHF (136-174MHz), 5.0 Watts, 260CH, Standard Key Model	731.50
NX-3220K3	VHF (136-174MHz), 5.0 Watts, 260CH, Full Key Model	796.20
NX-3320K	UHF (400-520MHz), 5.0 Watts, 64 CH, Basic Model	621.50
NX-3320K2	UHF (400-520MHz), 5.0 Watts, 260CH, Standard Key Model	731.50
NX-3320K3	UHF (400-520MHz), 5.0 Watts, 260CH, Full Key Model	796.20

RADIO TRUNKING PACKAGE		LIST
NX-3220K-TR	VHF (136-174MHz), 5.0 Watts, 64 CH, Basic Model with NXDN Trunking	654.30
NX-3220K2-TR	VHF (136-174MHz), 5.0 Watts, 260CH, Standard Key Model with NXDN Trunking	764.30
NX-3220K3-TR	VHF (136-174MHz), 5.0 Watts, 260CH, Full Key Model with NXDN Trunking	829.00
NX-3320K-TR	UHF (400-520MHz), 5.0 Watts, 64 CH, Basic Model with NXDN Trunking	654.30
NX-3320K2-TR	UHF (400-520MHz), 5.0 Watts, 260CH, Standard Key Model with NXDN Trunking	764.30
NX-3320K3-TR	UHF (400-520MHz), 5.0 Watts, 260CH, Full Key Model with NXDN Trunking	829.00

Li-ion VALUE PACKAGES (Preferred for Trunked Mode Usage)		LIST
NX-3220K2-XLKVP	VHF Extra-Cap Li-Ion Value Pack : NX-3220K2+KNB-78L(2860mAh)+KSC-25LSK+KRA-26M	994.40
NX-3320K2-XLKVP	UHF Extra-Cap Li-Ion Value Pack : NX-3320K2+KNB-78L(2860mAh)+KSC-25LSK+KRA-27M	994.40

Li-ion VALUE PACKAGES (Preferred for Conventional Mode Usage)		LIST
NX-3220K2LAKVP	VHF Hi-Cap Li-Ion Value Pack : NX-3220K2+KNB-57LAM(2000mAh)+KSC-25LSK+KRA-26M	951.70
NX-3320K2LAKVP	UHF Hi-Cap Li-Ion Value Pack : NX-3320K2+KNB-57LAM(2000mAh)+KSC-25LSK+KRA-27M	951.70
NX-3220KSLAKVP	VHF Li-Ion Value Pack : NX-3220K+KNB-55LAM(1480mAh)+KSC-25LSK+KRA-26M	792.90
NX-3220K2SLAKVP	VHF Li-Ion Value Pack : NX-3220K2+KNB-55LAM(1480mAh)+KSC-25LSK+KRA-26M	902.90
NX-3220K3SLAKVP	VHF Li-Ion Value Pack : NX-3220K3+KNB-55LAM(1480mAh)+KSC-25LSK+KRA-26M	967.60
NX-3320KSLAKVP	UHF Li-Ion Value Pack : NX-3320K+KNB-55LAM(1480mAh)+KSC-25LSK+KRA-27M	792.90
NX-3320K2SLAKVP	UHF Li-Ion Value Pack : NX-3320K2+KNB-55LAM(1480mAh)+KSC-25LSK+KRA-27M	902.90
NX-3320K3SLAKVP	UHF Li-Ion Value Pack : NX-3320K3+KNB-55LAM(1480mAh)+KSC-25LSK+KRA-27M	967.60

CSA US APPROVED MODELS		LIST
Must Order L-5062 & KNB-79LCM Intrinsically Safe Battery per radio		
NX-3220-ISCK	VHF (136-174MHz), 5.0 Watts, 64 CH, Basic Model	621.50
NX-3220-ISCK2	VHF (136-174MHz), 5.0 Watts, 512 CH, Standard Key Model	731.50
NX-3220-ISCK3	VHF (136-174MHz), 5.0 Watts, 512 CH, Full Key Model	796.20
NX-3320-ISCK	UHF (400-520MHz), 5.0 Watts, 64 CH, Basic Model	621.50
NX-3320-ISCK2	UHF (400-520MHz), 5.0 Watts, 512 CH, Standard Key Model	731.50
NX-3320-ISCK3	UHF (400-520MHz), 5.0 Watts, 512 CH, Full Key Model	796.20

Note: KNB-68LC is NOT compatible for NX-3000 Intrinsically Safe usage.

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.



NX-3220/3320

VHF/UHF Digital & FM Analog Portable Radios

Table of Contents

Radio Features		LIST
KWD-3000CH	License Key for 1000 Channel Expansion	190.20
KWD-3001FP	License Key for Front Panel Programming	148.50
KWD-3002BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-3002BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-3302TR	License Key for DMR Tier 3 Trunking	118.80
KWD-3501TR	License Key for Digital Trunking (Includes NXDN Type-C and Type-C Gen2, and Trunking 2.5)	49.50
KWD-3502EE	License Key for DMR ARC4 Enhanced Encryption	47.50
KWD-3503AE	License Key for AES/DES Encryption Note: 1. Factory Installation only. Must order L-5054. 2. Requires KPG-AE1/DE1 software key loader to encrypt. 3. KWD-3503AE is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Please see descriptions at the bottom.	534.70
KWD-3504RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	47.50
KWD-3505DE	License Key for DES Encryption Note: Requires KPG-AE1/DE1 software key loader to load encryption keys	118.80
ANTENNAS		LIST
KRA-22M	VHF Low-profile helical antenna 148-162 MHz	22.00
KRA-22M2	VHF Low -profile helical antenna 162-174 MHz	22.00
KRA-22M3	VHF Low-profile helical antenna 136-150 MHz	22.00
KRA-23M	UHF Low-profile helical antenna 450-490 MHz	22.00
KRA-23M2	UHF Low-profile helical antenna 470-520 MHz	22.00
KRA-23M3	UHF Low-profile helical antenna 403-430 MHz	22.00
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00
KRA-27M3	UHF whip antenna 400-450 MHz	22.00
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30
KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-42M3	UHF stubby antenna 403-430 MHz	18.30
KRA-25	High gain VHF helically loaded whip antenna 148-162 MHz	46.00
KRA-28	Broad-band VHF helically loaded whip antenna 140-170 MHz	56.30
BATTERIES AND CHARGERS		LIST
KNB-78LM	2860 mAh, Li-ion battery, IP67, battery only, best for trunked mode operation	176.20
KNB-57LAM	2000 mAh, Li-ion battery, IP67, battery only, best for conventional mode operation	133.50
KNB-55LAM	1480 mAh, Li-ion battery, IP67, battery only	84.70
KNB-56N	1400 mAh, Ni-MH battery, IP67, battery only	107.00
KNB-79LCM	CSA US Intrinsically Safe Battery Li-ion 2860mAh, IP67, battery only [Intrinsically Safe Option]	216.70
KBP-5	AA Alkaline Refillable Battery Pack (6 AA; 9V) cells not included	72.20



NX-3220/3320

VHF/UHF Digital & FM Analog Portable Radios

Table of Contents

Single Unit Desk Chargers

KSC-25LSK	100~240 volt rapid rate single unit charger for KNB-40LC(V)/55L/57L/57LAM/68LC/78LM/79LCM Li-ion Battery	64.70
KSC-25SK	110 volt Rapid rate single unit charger for KNB-26N/40LC(V)/55L/56N/57L/57LAM/68LC/78LM/79LCM	83.20

6 Unit Chargers

KMB-16	Six Unit Charger Adapter for the KSC-16/20/24/25/25L chargers (chargers not included)	249.50
KMB-23	Six Unit Charger Adapter for the KSC-16/20/24/25/25L/32 chargers (chargers not included)	381.30
KSC-526K	Rapid rate 6-unit charger CEC Compliant Note: Requires charging pocket KSC-52PBW and/or KSC-52PCW, and/or KSC-52PAW	906.20
KSC-52PCW	Charging pocket for KSC-526K compatible with NX-3000 series	12.00
KMB-526K	Wall Mount Bracket for KSC-526K	91.50

Vehicle Chargers/Adapters

KVC-4	Vehicular charger adapter for the KSC-16/18/20/24/25SK chargers (chargers not included) *KSC-25LSK is not compatible with KVC-4.	156.20
KVC-23A	Rapid rate DC vehicular charger for TK-5x10/5x20, NX-5x00/NX-3x00/x00/x10/x20, TK-x180, TK-x170, & TK-x360 portables with Lithium Ion /Lithium Polymer/NiMH packs only. Note: Compatible with KNB-L11 battery	402.70

CARRYING ACCESSORIES

		LIST
KBH-11	Spring action belt clip (2.5")	19.70
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-206K	Heavy-Duty Leather Case w/Swivel Belt Loop for Basic Model	65.50
KLH-206K2	Heavy-Duty Leather Case w/Swivel Belt Loop for Standard Keypad Model	65.50
KLH-206K3	Heavy-Duty Leather Case w/Swivel Belt Loop for Full Keypad Model	65.50
KLH-207K	Nylon carrying case for Basic Model	35.20
KLH-207K2	Nylon carrying case for Standard Keypad Model	35.20
KLH-207K3	Nylon carrying case for Full Keypad Model	35.20

SPECIAL COLOR HOUSING

		LIST
KWD-YH-3000P	High Visibility Green Housing Kit for NX-3x20 series Standard Key Portables Must order L-5068 for Factory Install. Eligible for warranty of IP67 immersion only when factory installed with L-5068. Note: If you order only housing and perform Dealer Installation, IP67 Warranty Claim will not be eligible. Note: Coloring of housing changed to High Visibility Green after Nov 2021 production. Original yellow is no longer available.	53.70

MICROPHONES & AUDIO ACCESSORIES

***IP grades for microphones and audio accessories are decided by each item.**

		LIST
KMC-45D	MIL-SPEC, IP54/55 Speaker microphone (Built-in 2.5mm miniature earphone jack) Note: KMC-45 (Non D version) is not compatible with DMR (TDMA) operation. [Intrinsically Safe Option]	115.30
KMC-21A	Compact speaker microphone [Intrinsically Safe Option]	69.00
KEP-2	2.5mm earphone kit for KMC-17/45 Speaker Mic [Intrinsically Safe Option]	74.50
KHS-7C	Single muff headset w/boom mic no PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	110.00
KHS-8BL	Two-Wire palm mic w/earphone (black) [Intrinsically Safe Option]	146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black) Note: Available for Analog and NXDN (FDMA) only. NOT compatible with DMR (TDMA) operations.	237.00



NX-3220/3320

Table of Contents

VHF/UHF Digital & FM Analog Portable Radios

KHS-10DC-BH	Hvy-duty Behind-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	504.20
KHS-10DC-OH	Hvy-duty Over-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	538.50
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver (low profile wire head band) [Intrinsically Safe Option]	75.80
KHS-26	Clip Mic w/earphone	40.00
KHS-27A	D-Ring Ear Hanger w/PTT & Mic	35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic	42.70
Sensear Bluetooth® Headsets Non-IS Models (SENS® Technology)		
SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB	775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	775.00
Sensear Bluetooth® Headsets IS Rated Models (SENS® Technology)		
SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB	940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB	1150.00
*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety: IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4 - 20°C to +40°C, T3C -20°C to +50°C		
SERVICE RELATED ACCESSORIES		LIST
KPG-D3NK	License Key for KPG-D3NK Programming Software for NX-3000 Portable/Mobile Note: Requires KPT-300LMC for authentication	184.00
KPG-AE1K	License Key for AES/DES Encryption Software Key Loader for KWD-3503AE Note: - Requires KPT-300LMC for authentication - KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A).	649.10
KPG-DE1K	License Key for DES Encryption Software Key Loader for KWD-3505DE Note: - Requires KPT-300LMC for authentication	436.50
KPG-22UM	USB Programming interface cable	212.30
INSTALLATION / TUNING CHARGES		LIST
L-836	Assemble KMB-16 with six KSC-25/25L	16.20
L-961	Assemble KMB-23 with six KSC-24/25/25L/32 (Rapid Rate, 120 Volt versions only)	18.00
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-5052	NX-3000 Series Portables Programming (with basic TX/RX check) Must submit NX-x000 Series Programming Order Form upon placing order for any programming services.	40.50
L-5054	Installation AES/DES for NX-3000 Portable/Mobile	27.00
L-5062	Configure NX-3000 series for CSA US Intrinsically Safe Note: NX-3000 series I.S. radios must be used with matching I.S. battery KNB-79LCM.	36.00
L-5068	Assemble Color Housing KWD-YH-3000U/P with NX-3000 series Portable	28.80



NX-3220/3320

[Table of Contents](#)

VHF/UHF Digital & FM Analog Portable Radios

-- IMPORTANT NOTES regarding ENCRYPTION SOFTWARE OPTION--

Encryption Software Option, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

JVCKENWOOD may request the following information to be submitted at time of order (this information must meet JVCKENWOOD internal approvals prior to shipment even if being returned to JVCKENWOOD later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination

(customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:


c) Intended Use of Radios: Law enforcement, security, operations, etc.



NX-3420

800/900MHz Digital & FM Analog Portable Radio

Table of Contents



All NX-3420 portables include:

- Belt Clip (KBH-11)
- Antenna (KRA-38K)
- 2-PIN Accessory Cover
- Channel Stopper
- User Guide
- Premium Warranty: 3 Years*

All Accessories / options: 1 Year

Purchase Battery and Charger separately

Note:

1. To meet IP grades and MIL, the 2-pin connector cap must be installed.
2. To maintain immersion specs (IP67), all warranty service must be done by National Kenwood Authorized Service Centers. IP67 Certification is valid under the 3 year premium warranty. No re-certification is available.

Because of spurious signal (birdie), the following frequencies (and $\pm 6.25\text{kHz}$ ranges) are not allowed:

- 854.4000 • 936.0000
- 859.2000 • 940.8000
- 864.0000
- 868.8000

STANDARD

GENERAL FEATURES

- 3 W (806-941 MHz) Model
- 260 CH-GID / 128 Zones
- Full Keypad Model (w/ LCD and D-pad/12 key)
- 4-Line Basic Frame (2-Line Main/Sub-LCD, icon & key guide)
- 5-Line Text Message Frame (3 Lines of Text, icon & key guide)
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- 7-color Light Bar Indicator
- Transmit/Busy/Call Alert/Warn LED
- Remote Stun/Kill/Check
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 4-way Directional-pad (For Standard/Full Keypad)
- Emergency Key
- 2 Side PF Keys
- 1W Speaker Audio
- Dual Digital Protocol¹
- Emergency Call Features
- Built-in GPS Receiver / Antenna
- Built-in Bluetooth® 4.0 Module
- Built-in Motion Sensor
- Active Noise Reduction (ANR)
- KPG-D3N Windows® FPU
- Flash Firmware Upgrading
- Optional Software-based DES and AES . Encryptions (Digital Only)
- MIL-STD-810 C/D/E/F/G
- IP54/55² Water & Dust Intrusion
- IP67² Immersion
- Digital Encode/Decode Format

1. Designed to operate digital, DMR OR NXDN, along with analog FM; a single FM digital protocol is selected with programming software.
2. Must equip **Accessory Cover** included with a Radio. Speaker Microphone does not cover IPs.

DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Paging Call
- Emergency Call
- All Group Call
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

DIGITAL – DMR MODE

- DMR Tier 2 Conventional Option
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Site Roaming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Option

ANALOG MODE

- Conventional Zones
- LTR® Zones
- FleetSync®/I: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF
- Built-in Voice Inversion Scrambler

OPTIONAL FEATURES

- 1000 Channel (**KWD-3000CH**)
- Front Panel Programming (**KWD-3001FP**)
- Built-in Bluetooth® Module for Data (**KWD-3002BT**)
- Digital NXDN Trunking (**Factory Installed**)
- DMR Tier 2 Conventional (**KWD-3301CV**)
- DMR Tier 3 Trunking (**KWD-3301CV & KWD-3302TR**)
- DMR ARC4 Enhanced Encryption (**KWD-3502EE**)
- AES/DES Encryption (**KWD-3503AE**)
- Remote Control Command by Subscriber Units (**KWD-3504RC**)

Approved by CSA-us International Inc. for Classes I, II & III, Div. 1, Groups D, E, F, G and are also approved for non-incendive use in Class I, Div. 2, Groups A, B, C hazardous locations.

RADIO

NX-3420K3 800/900MHz, 3.0 Watts, 260 CH, Full Key Model, NXDN Conv & Trunking

LIST

869.50

Li-ion VALUE PACKAGES (Preferred for Trunked Mode Usage)

NX-3420K3-XLKVP Extra-Cap Li-Ion Value Pack : NX-3420K3+KNB-78L(2860mAh)+KSC-25LSK

LIST

1110.40



NX-3420

800/900MHz Digital & FM Analog Portable Radio

Table of Contents

CSA US APPROVED MODELS LIST

Must Order L-5062 & KNB-79LCM Intrinsically Safe Battery per radio

NX-3420-ISCK3	800/900MHz, 3.0 Watts, 260 CH, Full Key Model, NXDN Conv & Trunking	869.50
---------------	---	--------

Note: KNB-68LC is NOT compatible for NX-3000 Intrinsically Safe usage.

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features LIST

KWD-3000CH	License Key for 1000 Channel Expansion	190.20
KWD-3001FP	License Key for Front Panel Programming	148.50
KWD-3002BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-3002BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-3301CV	License Key for DMR Tier 2 Conventional	49.50
KWD-3302TR	License Key for DMR Tier 3 Trunking (Requires KWD-3301CV)	118.80
KWD-3502EE	License Key for DMR ARC4 Enhanced Encryption	47.50
KWD-3503AE	License Key for AES/DES Encryption Note: 1. Factory Installation only. Must order L-5054. 2. Requires KPG-AE1/DE1 software key loader to encrypt. 3. KWD-3503AE is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Please see descriptions at the bottom.	534.70
KWD-3504RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	47.50
KWD-3505DE	License Key for DES Encryption Note: Requires KPG-AE1/DE1 software key loader to load encryption keys	118.80

ANTENNAS LIST

KRA-32K	700/800 MHz Whip Antenna	46.80
KRA-36	700/800 MHz Stubby Antenna	33.50
KRA-38K	800/900 MHz Whip Antenna	46.80
KRA-39	900 MHz Stubby Antenna	33.50

BATTERIES AND CHARGERS LIST

KNB-78LM	2860 mAh, Li-ion battery, IP67, battery only, best for trunked mode operation	176.20
KNB-57LAM	2000 mAh, Li-ion battery, IP67, battery only, best for conventional mode operation	133.50
KNB-55LAM	1480 mAh, Li-ion battery, IP67, battery only	84.70
KNB-56N	1400 mAh, Ni-MH battery, IP67, battery only	107.00
KNB-79LCM	CSA US Intrinsically Safe Battery Li-ion 2860mAh, IP67, battery only [Intrinsically Safe Option]	216.70
KBP-5	AA Alkaline Refillable Battery Pack (6 AA; 9V) cells not included	72.20



NX-3420

800/900MHz Digital & FM Analog Portable Radio

[Table of Contents](#)

Single Unit Desk Chargers

KSC-25LSK	100~240 volt rapid rate single unit charger for KNB-40LC(V)/55L/57L/57LAM/68LC/78LM/79LCM Li-ion Battery	64.70
KSC-25SK	110 volt Rapid rate single unit charger for KNB-26N/40LC(V)/55L/56N/57L/57LAM/68LC/78LM/79LCM	83.20

6 Unit Chargers

KMB-16	Six Unit Charger Adapter for the KSC-16/20/24/25/25L chargers (chargers not included)	249.50
KMB-23	Six Unit Charger Adapter for the KSC-16/20/24/25/25L/32 chargers (chargers not included)	381.30
KSC-526K	Rapid rate 6-unit charger CEC Compliant Note: Requires charging pocket KSC-52PBW and/or KSC-52PCW, and/or KSC-52PAW	906.20
KSC-52PCW	Charging pocket for KSC-526K compatible with NX-3000 series	12.00
KMB-526K	Wall Mount Bracket for KSC-526K	91.50

Vehicle Chargers/Adapters

KVC-4	Vehicular charger adapter for the KSC-16/18/20/24/25SK chargers (chargers not included) *KSC-25LSK is not compatible with KVC-4.	156.20
KVC-23A	Rapid rate DC vehicular charger for TK-5x10/5x20, NX-5x00/NX-3x00/x00/x10/x20, TK-x180, TK-x170, & TK-x360 portables with Lithium Ion /Lithium Polymer/NiMH packs only. Note: Compatible with KNB-L11 battery	402.70

CARRYING ACCESSORIES

LIST

KBH-11	Spring action belt clip (2.5")	19.70
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-206K3	Heavy-Duty Leather Case w/Swivel Belt Loop for Full Keypad Model	65.50
KLH-207K3	Nylon carrying case for Full Keypad Model	35.20

MICROPHONES & AUDIO ACCESSORIES

LIST

***IP grades for microphones and audio accessories are decided by each item.**

KMC-45D	MIL-SPEC, IP54/55 Speaker microphone (Built-in 2.5mm miniature earphone jack) Note: KMC-45 (Non D version) is not compatible with DMR (TDMA) operation. [Intrinsically Safe Option]	115.30
KMC-21A	Compact speaker microphone [Intrinsically Safe Option]	69.00
KEP-2	2.5mm earphone kit for KMC-17/45 Speaker Mic [Intrinsically Safe Option]	74.50
KHS-7C	Single muff headset w/boom mic no PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	110.00
KHS-8BL	Two-Wire palm mic w/earphone (black) [Intrinsically Safe Option]	146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black) Note: Available for Analog and NXDN (FDMA) only. NOT compatible with DMR (TDMA) operations.	237.00
KHS-10DC-BH	Hvy-duty Behind-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	504.20
KHS-10DC-OH	Hvy-duty Over-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	538.50
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver (low profile wire head band) [Intrinsically Safe Option]	75.80
KHS-26	Clip Mic w/earphone	40.00
KHS-27A	D-Ring Ear Hanger w/PTT & Mic	35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic	42.70

	NX-3420 800/900MHz Digital & FM Analog Portable Radio	Table of Contents
---	---	--

Sensear Bluetooth® Headsets Non-IS Models (SENS® Technology)

SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB	775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	775.00

Sensear Bluetooth® Headsets IS Rated Models (SENS® Technology)

SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB	940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB	1150.00

*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety:

IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4 -20°C to +40°C, T3C -20°C to +50°C

SERVICE RELATED ACCESSORIES	LIST
-----------------------------	------

KPG-D3NK	License Key for KPG-D3NK Programming Software for NX-3000 Portable/Mobile Note: Requires KPT-300LMC for authentication	184.00
KPG-AE1K	License Key for AES/DES Encryption Software Key Loader for KWD-3503AE Note: - Requires KPT-300LMC for authentication - KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A).	649.10
KPG-DE1K	License Key for DES Encryption Software Key Loader for KWD-3505DE Note: - Requires KPT-300LMC for authentication	436.50
KPG-22UM	USB Programming interface cable	212.30

INSTALLATION / TUNING CHARGES	LIST
-------------------------------	------

L-836	Assemble KMB-16 with six KSC-25/25L	16.20
L-961	Assemble KMB-23 with six KSC-24/25/25L/32 (Rapid Rate, 120 Volt versions only)	18.00
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-5052	NX-3000 Series Portables Programming (with basic TX/RX check) Must submit NX-x000 Series Programming Order Form upon placing order for any programming services.	40.50
L-5054	Installation AES/DES for NX-3000 Portable/Mobile	27.00
L-5062	Configure NX-3000 series for CSA US Intrinsically Safe Note: NX-3000 series I.S. radios must be used with matching I.S. battery KNB-79LCM.	36.00

-- IMPORTANT NOTES regarding ENCRYPTION SOFTWARE OPTION--

Encryption Software Option, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

JVCKENWOOD may request the following information to be submitted at time of order (this information must meet JVCKENWOOD internal approvals prior to shipment even if being returned to JVCKENWOOD later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination (customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

c) Intended Use of Radios: Law enforcement, security, operations, etc.

NEXEDGE®

NX-1200NV/1300NU

VHF/UHF NXDN & FM Analog Portable Radios

Table of Contents



All NX-1000 series portables include:

- Li-ion Battery (KNB-45L)
- Fast Charger (KSC-35SK)
- Antenna [KRA-26M(VHF)/27M(UHF)]
- Belt Clip (KBH-10)
- 2-PIN Connector Cap
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

Note:

1. To meet IP grades and MIL, the 2-pin connector cap or accessory must be installed.

STANDARD

GENERAL FEATURES

- 5 W (136-174 MHz) Models
- 5 W (400-470 MHz) Models
- 5 W (450-520 MHz) Models
- NXDN & Analog Mode
- Optional DMR Mode Conversion
- AMBE+2™ VOCODER
- 260 CH-GID / 128 Zones
- 64 CH-GID / 4 Zones (For Basic Models)
- Basic Models
- Standard Keypad Models w/ LCD
- 13-seg, 8-character LCD
- 7-color LED Indicator
- KENWOOD Audio Quality
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
 - Noise Suppressor
 - Microphone type selection
- Multiple Scan Functions
 - Dual Priority, Single, Zone, Multi, Scan
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 2 Side PF Keys
- 1W Speaker Audio
- VOX
- Emergency Call Features
- Lone Worker
- Max/Min Volume Setting
- Voice Announcement
- Front Panel Programming Mode
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IP54/55 Water & Dust Intrusion
- Intrinsically Safe Option

DIGITAL – NXDN® MODE

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- NXDN® Scrambler
- NXDN® ESN Validation (for Type-D System)
- Late Entry

DIGITAL – DMR MODE (Optional)

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- Over-the-Air Alias
- Late Entry
- ARC4 Encryption Option

ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Unihit, Radio Check, Emergency
- QT / DQT, Two-Tone, DTMF
- Built-in Voice Inversion Scrambler
- Built-in Compander

OPTIONAL FEATURES

- NXDN Type-D Trunking License (**KWD-1202TDK**)
- DMR Conversion License (**KWD-1301CN**)
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**) *Only applicable after DMR conversion
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license. Please download latest firmware from MyTools website > Product > Firmware

Approved for Class I, Div. 1, Group D and are also approved for non-Incendive use in Class I, Div. 2, Groups A, B, C, D hazardous locations.

RADIO			LIST
NX-1200NVBK	VHF (136-174MHz), 5W, 64 CH, Basic Model, NXDN/Analog		405.80
NX-1200NVBK2	VHF (136-174MHz), 5W, 260 CH, LCD & Standard Keypad, NXDN/Analog		506.80
NX-1300NUBK	UHF (450-520MHz), 5W, 64 CH, Basic Model, NXDN/Analog		405.80
NX-1300NUBK2	UHF (450-520MHz), 5W, 260 CH, LCD & Standard Keypad, NXDN/Analog		506.80
NX-1300NUBK4	UHF (400-470MHz), 5W, 64 CH, Basic Model, NXDN/Analog		405.80
NX-1300NUBK5	UHF (400-470MHz), 5W, 260 CH, LCD & Standard Keypad, NXDN/Analog		506.80
CSA US APPROVED MODELS			LIST
All in one package with Radio, Antenna, Battery (KNB-82LCM Intrinsically Safe Battery) and Charger			
NX-1200-ISCNBK	VHF (136-174MHz), 5W, 64 CH, Basic Model, NXDN/Analog		602.00
Note: Can be used in Class I Gas Environment only			

NEXEDGE®	NX-1200NV/1300NU VHF/UHF NXDN & FM Analog Portable Radios	Table of Contents
-----------------	---	-------------------

NX-1200-ISCNBK2	VHF (136-174MHz), 5W, 260 CH, LCD & Standard Keypad, NXDN/Analog Note: Can be used in Class I Gas Environment only	702.70
CSA US APPROVED MODELS, CON'T		LIST
NX-1300-ISCNBK	UHF (450-520MHz), 5W, 64 CH, Basic Model, NXDN/Analog Note: Can be used in Class I Gas Environment only	602.00
NX-1300-ISCNBK2	UHF (450-520MHz), 5W, 260 CH, LCD & Standard Keypad, NXDN/Analog Note: Can be used in Class I Gas Environment only	702.70
NX-1300-ISCNBK4	UHF (400-470MHz), 5W, 64 CH, Basic Model, NXDN/Analog Note: Can be used in Class I Gas Environment only	602.00
NX-1300-ISCNBK5	UHF (400-470MHz), 5W, 260 CH, LCD & Standard Keypad, NXDN/Analog Note: Can be used in Class I Gas Environment only	702.70
ANTENNAS		LIST
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00
KRA-27M3	UHF whip antenna 400-450 MHz	22.00
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30
KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-42M3	UHF stubby antenna 403-430 MHz	18.30
KRA-22M	VHF low profile antenna 148-162 MHz	22.00
KRA-22M2	VHF low profile antenna 162-174 MHz	22.00
KRA-22M3	VHF low profile antenna 136-150 MHz	22.00
KRA-23M	UHF low profile antenna 450-490 MHz	22.00
KRA-23M2	UHF low profile antenna 470-520 MHz	22.00
KRA-23M3	UHF low profile antenna 403-430 MHz	22.00
BATTERIES AND CHARGERS		LIST
KNB-45LK	2000 mAh, Li-ion battery - requires KSC-35K/SK charger	87.20
KNB-69L	2550 mAh, Li-ion battery - requires KSC-35K/SK charger	105.00
KNB-82LCM	CSA US Intrinsically Safe Battery Li-ion 1900mAh, battery only [Intrinsically Safe Option]	154.00
KNB-29N	1500 mAh, NiMH battery - requires KSC-43K charger	49.30
KSC-35SK	110~220 volt Fast rate single unit charger for KNB-45L/69L	42.20
KSC-43K	110~220 volt Fast rate single unit charger for KNB-29N/45L/69L	49.20
KMB-28AK	Six Unit Charger Adapter for the KSC-35SK chargers (chargers not included) Note: A supplied in-line AC-DC switching power supply with six DC plugs supply installed KSC-xx charger bases. This unit is lower profile and less weight than similar Kenwood six unit charger adapters.	280.00
KVC-22	110~220 volt Fast rate DC vehicular charger adapter for KSC-35SK charger (charger not included)	49.20

NEXEDGE®

NX-1200NV/1300NU

VHF/UHF NXDN & FM Analog Portable Radios

Table of Contents

CARRYING ACCESSORIES		LIST
KBH-10	Spring action belt clip	11.00
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-187	Nylon case for NX-1200/1300 srs	19.70
MICROPHONES & AUDIO ACCESSORIES		LIST
KMC-45D	MIL-SPEC, IP54/55 Speaker microphone (Built-in 2.5mm miniature earphone jack) Note: KMC-45 (Non D version) is not compatible with DMR (TDMA) operation. [Intrinsically Safe Option]	115.30
KMC-21A	Compact speaker microphone [Intrinsically Safe Option]	69.00
KEP-2	2.5mm earphone kit for KMC-17/45 Speaker Mic [Intrinsically Safe Option]	74.50
KHS-7C	Single muff headset w/boom mic no PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	110.00
KHS-8BL	Two-Wire palm mic w/earphone (black) [Intrinsically Safe Option]	146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black) Note: Available for Analog and NXDN (FDMA) only. NOT compatible with DMR (TDMA) operations.	237.00
KHS-10DC-BH	Hvy-duty Behind-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	504.20
KHS-10DC-OH	Hvy-duty Over-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	538.50
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver (low profile wire head band) [Intrinsically Safe Option]	75.80
KHS-26	Clip Mic w/earphone [Intrinsically Safe Option]	40.00
KHS-27A	D-Ring Ear Hanger w/PTT & Mic	35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic	42.70

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features		LIST
KWD-1202TDK	License Key for NXDN Type-D Trunking	12.00
KWD-1301CN	License Key for DMR Conventional Conversion	49.50
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption Note: ARC4 Enhanced Encryption is available only in DMR mode.	39.70
KWD-1501RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	39.70

NEXEDGE®

NX-1200NV/1300NU

VHF/UHF NXDN & FM Analog Portable Radios

Table of Contents

SERVICE RELATED ACCESSORIES		LIST
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile Note: Requires KPT-300LMC for authentication	122.80
KPG-22UM	USB Programming interface cable	212.30
E30-3410-05	2 pin Clone Cable	107.00
Contact Kenwood Parts for price and availability for listed parts		
D32-0456-03	Channel stopper for NX-1000 series Basic(No Display) model	-
INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-5075	NX-1000 Series Portables Programming (with basic TX/RX check) Must submit NX-x000 Series Programming Order Form upon placing order for any programming services.	40.50

NEXEDGE®

NX-1200NV/1300NU (K3/K6)

VHF/UHF NXDN & FM Analog Portable Radios

Table of Contents



NX-1000 series full keypad portables include:

- Li-Ion Battery (KNB-84LM)
- Fast Charger (KSC-35SK)
- Antenna [KRA-26M(VHF)/27M(UHF)]
- Belt Clip (KBH-10)
- 2-PIN Connector Cap
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

Note:

1. To meet IP grades and MIL, radio must be installed with the KNB-84LA and the 2-pin connector cap.

STANDARD

■ GENERAL FEATURES

- 5 W (136-174 MHz) Models
- 5 W (400-470 MHz) Models
- 5 W (450-520 MHz) Models
- NXDN & Analog Mode
- Optional DMR Mode Conversion
- AMBE+2™ VOCODER
- 260 CH-GID / 128 Zones
- Full Keypad Models w/ LCD
- 13-seg, 8-character LCD
- 7-color LED Indicator
- KENWOOD Audio Quality
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
 - Noise Suppressor
 - Microphone type selection
- Multiple Scan Functions
 - Dual Priority, Single, Zone, Multi, Scan
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 2 Side PF Keys
- 1W Speaker Audio
- VOX
- Emergency Call Features
- Lone Worker
- Max/Min Volume Setting
- Voice Announcement
- Front Panel Programming Mode
- Manual Dialing
 - (Analog DTMF, Digital Status Messaging and Individual Calling)
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IEC 60529 - IP54/55/67 Water & Dust Intrusion

■ DIGITAL – NXDN® MODE

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- NXDN® Scrambler
- NXDN® ESN Validation (for Type-D System)
- Late Entry

■ DIGITAL – DMR MODE (Optional)

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- Over-the-Air Alias
- Late Entry
- ARC4 Encryption Option

■ ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Unihit, Radio Check, Emergency
- QT / DQT, Two-Tone, DTMF
- Built-in Voice Inversion Scrambler
- Built-in Compander

OPTIONAL FEATURES

- NXDN Type-D Trunking License (**KWD-1202TDK**)
- DMR Conversion License (**KWD-1301CN**)
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**) *Only applicable after DMR conversion
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license. Please download latest firmware from MyTools website > Product > Firmware

RADIO		LIST
NX-1200NVK3	VHF (136-174MHz), 5W, 260 CH, LCD & Full Keypad, NXDN/Analog	601.20
NX-1300NUK3	UHF (450-520MHz), 5W, 260 CH, LCD & Full Keypad, NXDN/Analog	601.20
NX-1300NUK6	UHF (400-470MHz), 5W, 260 CH, LCD & Full Keypad, NXDN/Analog	601.20
ANTENNAS		LIST
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00
KRA-27M3	UHF whip antenna 400-450 MHz	22.00

NEXEDGE®

NX-1200NV/1300NU (K3/K6)

VHF/UHF NXDN & FM Analog Portable Radios

Table of Contents

ANTENNAS, CON'T		LIST
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30
KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-42M3	UHF stubby antenna 403-430 MHz	18.30
KRA-22M	VHF low profile antenna 148-162 MHz	22.00
KRA-22M2	VHF low profile antenna 162-174 MHz	22.00
KRA-22M3	VHF low profile antenna 136-150 MHz	22.00
KRA-23M	UHF low profile antenna 450-490 MHz	22.00
KRA-23M2	UHF low profile antenna 470-520 MHz	22.00
KRA-23M3	UHF low profile antenna 403-430 MHz	22.00
BATTERIES AND CHARGERS		LIST
KNB-45LK	2000 mAh, Li-ion battery - requires KSC-35K/SK charger	87.20
KNB-69L	2550 mAh, Li-ion battery - requires KSC-35K/SK charger	105.00
KNB-84LM	1900 mAh, Li-ion battery (IEC 60529 - IP67) - requires KSC-35K/SK charger	98.50
KNB-29N	1500 mAh, NiMH battery - requires KSC-43K charger	49.30
KSC-35SK	110~220 volt Fast rate single unit charger for KNB-45L/69L/84LM	42.20
KSC-43K	110~220 volt Fast rate single unit charger for KNB-29N/45L/69L/84LM	49.20
KMB-28AK	Six Unit Charger Adapter for the KSC-35SK chargers (chargers not included) Note: A supplied in-line AC-DC switching power supply with six DC plugs supply installed KSC-xx charger bases. This unit is lower profile and less weight than similar Kenwood six unit charger adapters.	280.00
KVC-22	110~220 volt Fast rate DC vehicular charger adapter for KSC-35SK charger (charger not included)	49.20
CARRYING ACCESSORIES		LIST
KBH-10	Spring action belt clip	11.00
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-187	Nylon case for NX-1200/1300 srs (non-DTMF)	19.70
MICROPHONES & AUDIO ACCESSORIES		LIST
KMC-45D	MIL-SPEC, IP54/55 Speaker microphone (Built-in 2.5mm miniature earphone jack) Note: KMC-45 (Non D version) is not compatible with DMR (TDMA) operation.	115.30
KMC-21A	Compact speaker microphone	69.00
KEP-2	2.5mm earphone kit for KMC-17/45 Speaker Mic	74.50
KHS-7C	Single muff headset w/boom mic no PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	110.00
KHS-8BL	Two-Wire palm mic w/earphone (black)	146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black) Note: Available for Analog and NXDN (FDMA) only. NOT compatible with DMR (TDMA) operations.	237.00
KHS-10DC-BH	Hvy-duty Behind-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB	504.20
KHS-10DC-OH	Hvy-duty Over-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB	538.50
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver (low profile wire head band)	75.80
KHS-26	Clip Mic w/earphone	40.00
KHS-27A	D-Ring Ear Hanger w/PTT & Mic	35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic	42.70

NEXEDGE®

NX-1200NV/1300NU (K3/K6)

VHF/UHF NXDN & FM Analog Portable Radios

Table of Contents

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features		LIST
KWD-1202TDK	License Key for NXDN Type-D Trunking	12.00
KWD-1301CN	License Key for DMR Conventional Conversion	49.50
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption Note: ARC4 Enhanced Encryption is available only in DMR mode.	39.70
KWD-1501RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	39.70

SERVICE RELATED ACCESSORIES		LIST
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile Note: Requires KPT-300LMC for authentication	122.80
KPG-22UM	USB Programming interface cable	212.30
E30-3410-05	2 pin Clone Cable	107.00
Contact Kenwood Parts for price and availability for listed parts		
D32-0456-03	Channel stopper for NX-1000 series Basic(No Display) model	-

INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.7
L-5075	NX-1000 Series Portables Programming (with basic TX/RX check) Must submit NX-x000 Series Programming Order Form upon placing order for any programming services.	40.50



NX-1200DV/1300DU

VHF/UHF DMR & FM Analog Portable Radios

Table of Contents



All NX-1000 series portables include:

- Li-ion Battery (KNB-45L)
- Fast Charger (KSC-35SK)
- Antenna [KRA-26M(VHF)/27M(UHF)]
- Belt Clip (KBH-10)
- 2-PIN Connector Cap
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

Note:

1. To meet IP grades and MIL, the 2-pin connector cap or accessory must be installed.

STANDARD

■ GENERAL FEATURES

- 5 W (136-174 MHz) Models
- 5 W (400-470 MHz) Models
- 5 W (450-520 MHz) Models
- DMR & Analog Mode
- Optional NXDN Mode Conversion
- AMBE+2™ VOCODER
- 260 CH-GID / 128 Zones
- 64 CH-GID / 4 Zones (For Basic Models)
- Basic Models
- Standard Keypad Models (w/ LCD)
- 13-seg, 8-character LCD
- 7-color LED Indicator
- KENWOOD Audio Quality
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
 - Noise Suppressor
 - Microphone type selection
- Multiple Scan Functions
 - Dual Priority, Single, Zone, Multi, Scan
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 2 Side PF Keys
- 1W Speaker Audio
- VOX
- Emergency Call Features
- Lone Worker
- Max/Min Volume Setting
- Voice Announcement
- Front Panel Programming Mode
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IP54/55 Water & Dust Intrusion
- Intrinsically Safe Option

■ DIGITAL – DMR MODE

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- Over-the-Air Alias
- Late Entry
- ARC4 Encryption Option

■ DIGITAL – NXDN® MODE (Optional)

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- NXDN® Scrambler
- NXDN® ESN Validation (for Type-D System)
- Late Entry

■ ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Unihabit, Radio Check, Emergency
- QT / DQT
- Two-Tone
- DTMF
- Built-in Voice Inversion Scrambler (per channel)
- Built-in Compander (per channel)

OPTIONAL FEATURES

- NXDN Conversion License (**KWD-1201CD**)
- NXDN Type-D Trunking License (**KWD-1202TDK**) *Requires KWD-1201CD enabled
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**)
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license. Please download latest firmware from MyTools website > Product > Firmware

Approved for Class I, Div. 1, Group D and are also approved for non-Incendive use in Class I, Div. 2, Groups A, B, C, D hazardous locations.

RADIO		LIST
NX-1200DVBK	VHF (136-174MHz), 5W, 64 CH, Basic Model, DMR/Analog	405.80
NX-1200DVBK2	VHF (136-174MHz), 5W, 260 CH, LCD & Standard Keypad, DMR/Analog	506.80
NX-1300DUBK	UHF (450-520MHz), 5W, 64 CH, Basic Model, DMR/Analog	405.80
NX-1300DUBK2	UHF (450-520MHz), 5W, 260 CH, LCD & Standard Keypad, DMR/Analog	506.80
NX-1300DUBK4	UHF (400-470MHz), 5W, 64 CH, Basic Model, DMR/Analog	405.80
NX-1300DUBK5	UHF (400-470MHz), 5W, 260 CH, LCD & Standard Keypad, DMR/Analog	506.80

	NX-1200DV/1300DU VHF/UHF DMR & FM Analog Portable Radios	Table of Contents
---	--	--

CSA US APPROVED MODELS		LIST
All in one package with Radio, Antenna, Battery (KNB-82LCM Intrinsically Safe Battery) and Charger		
NX-1200-ISCDBK	VHF (136-174MHz), 5W, 64 CH, Basic Model, DMR/Analog Note: Can be used in Class I Gas Environment only	602.00
NX-1200-ISCDBK2	VHF (136-174MHz), 5W, 260 CH, LCD & Standard Keypad, DMR/Analog Note: Can be used in Class I Gas Environment only	702.70
NX-1300-ISCDBK	UHF (450-520MHz), 5W, 64 CH, Basic Model, DMR/Analog Note: Can be used in Class I Gas Environment only	602.00
NX-1300-ISCDBK2	UHF (450-520MHz), 5W, 260 CH, LCD & Standard Keypad, DMR/Analog Note: Can be used in Class I Gas Environment only	702.70
NX-1300-ISCDBK4	UHF (400-470MHz), 5W, 64 CH, Basic Model, DMR/Analog Note: Can be used in Class I Gas Environment only	602.00
NX-1300-ISCDBK5	UHF (400-470MHz), 5W, 260 CH, LCD & Standard Keypad, DMR/Analog Note: Can be used in Class I Gas Environment only	702.70
ANTENNAS		LIST
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00
KRA-27M3	UHF whip antenna 400-450 MHz	22.00
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30
KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-42M3	UHF stubby antenna 403-430 MHz	18.30
KRA-22M	VHF low profile antenna 148-162 MHz	22.00
KRA-22M2	VHF low profile antenna 162-174 MHz	22.00
KRA-22M3	VHF low profile antenna 136-150 MHz	22.00
KRA-23M	UHF low profile antenna 450-490 MHz	22.00
KRA-23M2	UHF low profile antenna 470-520 MHz	22.00
KRA-23M3	UHF low profile antenna 403-430 MHz	22.00
BATTERIES AND CHARGERS		LIST
KNB-45LK	2000 mAh, Li-ion battery - requires KSC-35K/SK charger	87.20
KNB-69L	2550 mAh, Li-ion battery - requires KSC-35K/SK charger	105.00
KNB-82LCM	CSA US Intrinsically Safe Battery Li-ion 1900mAh, battery only [Intrinsically Safe Option]	154.00
KNB-29N	1500 mAh, NiMH battery - requires KSC-43K charger	49.30
KSC-35SK	110~220 volt Fast rate single unit charger for KNB-45L/69L	42.20
KSC-43K	110~220 volt Fast rate single unit charger for KNB-29N/45L/69L	49.20
KMB-28AK	Six Unit Charger Adapter for the KSC-35SK chargers (chargers not included) Note: A supplied in-line AC-DC switching power supply with six DC plugs supply installed KSC-xx charger bases. This unit is lower profile and less weight than similar Kenwood six unit charger adapters.	280.00
KVC-22	110~220 volt Fast rate DC vehicular charger adapter for KSC-35SK charger (charger not included)	49.20

	NX-1200DV/1300DU VHF/UHF DMR & FM Analog Portable Radios	Table of Contents
---	--	--

CARRYING ACCESSORIES		LIST
KBH-10	Spring action belt clip	11.00
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-187	Nylon case for NX-1200/1300 srs	19.70
MICROPHONES & AUDIO ACCESSORIES		LIST
KMC-45D	MIL-SPEC, IP54/55 Speaker microphone (Built-in 2.5mm miniature earphone jack) Note: KMC-45 (Non D version) is not compatible with DMR (TDMA) operation. [Intrinsically Safe Option]	115.30
KMC-21A	Compact speaker microphone [Intrinsically Safe Option]	69.00
KEP-2	2.5mm earphone kit for KMC-17/45 Speaker Mic [Intrinsically Safe Option]	74.50
KHS-7C	Single muff headset w/boom mic no PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	110.00
KHS-8BL	Two-Wire palm mic w/earphone (black) [Intrinsically Safe Option]	146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black) Note: Available for Analog and NXDN (FDMA) only. NOT compatible with DMR (TDMA) operations.	237.00
KHS-10DC-BH	Hvy-duty Behind-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	504.20
KHS-10DC-OH	Hvy-duty Over-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	538.50
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver (low profile wire head band) [Intrinsically Safe Option]	75.80
KHS-26	Clip Mic w/earphone [Intrinsically Safe Option]	40.00
KHS-27A	D-Ring Ear Hanger w/PTT & Mic	35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic	42.70

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- **FPU & Software Applications:** Software License Key Request Form
- **Radio Feature Licenses:** Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features		LIST
KWD-1201CD	License Key for NXDN Conventional Conversion	49.50
KWD-1202TDK	License Key for NXDN Type-D Trunking Note: Requires KWD-1201CD (NXDN Conventional) enabled before applying NXDN Type-D Trunking license.	12.00
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption Note: ARC4 Enhanced Encryption is available only in DMR mode.	39.70
KWD-1501RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	39.70

NX-1200DV/1300DU

VHF/UHF DMR & FM Analog Portable Radios

[Table of Contents](#)

SERVICE RELATED ACCESSORIES		LIST
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile <u>Note:</u> Requires KPT-300LMC for authentication	122.80
KPG-22UM	USB Programming interface cable	212.30
E30-3410-05	2 pin Clone Cable	107.00
<i>Contact Kenwood Parts for price and availability for listed parts</i>		
D32-0456-03	Channel stopper for NX-1000 series Basic(No Display) model	-
INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) <u>Note:</u> Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-5075	NX-1000 Series Portables Programming (with basic TX/RX check) Must submit <u>NX-x000 Series Programming Order Form</u> upon placing order for any programming services.	40.50



NX-1200DV/1300DU (K3/K6)

VHF/UHF DMR & FM Analog Portable Radios

Table of Contents



NX-1000 series full keypad portables include:

- Li-ion Battery (KNB-84LM)
- Fast Charger (KSC-35SK)
- Antenna [KRA-26M(VHF)/27M(UHF)]
- Belt Clip (KBH-10)
- 2-PIN Connector Cap
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

Note:

1. To meet IP grades and MIL, radio must be installed with the KNB-84LA and the 2-pin connector cap.

STANDARD

■ GENERAL FEATURES

- 5 W (136-174 MHz) Models
- 5 W (400-470 MHz) Models
- 5 W (450-520 MHz) Models
- DMR & Analog Mode
- Optional NXDN Mode Conversion
- AMBE+2™ VOCODER
- 260 CH-GID / 128 Zones
- Full Keypad Models w/ LCD
- 13-seg, 8-character LCD
- 7-color LED Indicator
- KENWOOD Audio Quality
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
 - Noise Suppressor
- Microphone type selection
- Multiple Scan Functions
 - Dual Priority, Single, Zone, Multi, Scan
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 2 Side PF Keys
- 1W Speaker Audio
- VOX
- Emergency Call Features
- Lone Worker
- Max/Min Volume Setting
- Voice Announcement
- Front Panel Programming Mode
- Manual Dialing
 - (Analog DTMF, Digital Status Messaging and Individual Calling)
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IEC 60529 - IP54/55/67 Water & Dust Intrusion

■ DIGITAL – DMR MODE

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- Over-the-Air Alias
- Late Entry
- ARC4 Encryption Option

■ DIGITAL – NXDN® MODE (Optional)

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- NXDN® Scrambler
- NXDN® ESN Validation (for Type-D System)
- Late Entry

■ ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Unihit, Radio Check, Emergency
- QT / DQT
- Two-Tone
- DTMF
- Built-in Voice Inversion Scrambler (per channel)
- Built-in Compander (per channel)

OPTIONAL FEATURES

- NXDN Conversion License (**KWD-1201CD**)
- NXDN Type-D Trunking License (**KWD-1202TDK**) *Requires KWD-1201CD enabled
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**)
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license. Please download latest firmware from MyTools website > Product > Firmware

RADIO		LIST
NX-1200DVK3	VHF (136-174MHz), 5W, 260 CH, Full Keypad Model, DMR/Analog	601.20
NX-1300DUK3	UHF (450-520MHz), 5W, 260 CH, Full Keypad Model, DMR/Analog	601.20
NX-1300DUK6	UHF (400-470MHz), 5W, 260 CH, Full Keypad Model, DMR/Analog	601.20
ANTENNAS		LIST
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00
KRA-27M3	UHF whip antenna 400-450 MHz	22.00



NX-1200DV/1300DU (K3/K6)

VHF/UHF DMR & FM Analog Portable Radios

Table of Contents

ANTENNAS, CON'T		LIST
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30
KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-42M3	UHF stubby antenna 403-430 MHz	18.30
KRA-22M	VHF low profile antenna 148-162 MHz	22.00
KRA-22M2	VHF low profile antenna 162-174 MHz	22.00
KRA-22M3	VHF low profile antenna 136-150 MHz	22.00
KRA-23M	UHF low profile antenna 450-490 MHz	22.00
KRA-23M2	UHF low profile antenna 470-520 MHz	22.00
KRA-23M3	UHF low profile antenna 403-430 MHz	22.00
BATTERIES AND CHARGERS		LIST
KNB-45LK	2000 mAh, Li-ion battery - requires KSC-35K/SK charger	87.20
KNB-69L	2550 mAh, Li-ion battery - requires KSC-35K/SK charger	105.00
KNB-84LM	1900 mAh, Li-ion battery (IEC 60529 - IP67) - requires KSC-35K/SK charger	98.50
KNB-29N	1500 mAh, NiMH battery - requires KSC-43K charger	49.30
KSC-35SK	110~220 volt Fast rate single unit charger for KNB-45L/69L/84LM	42.20
KSC-43K	110~220 volt Fast rate single unit charger for KNB-29N/45L/69L/84LM	49.20
KMB-28AK	Six Unit Charger Adapter for the KSC-35SK chargers (chargers not included) Note: A supplied in-line AC-DC switching power supply with six DC plugs supply installed KSC-xx charger bases. This unit is lower profile and less weight than similar Kenwood six unit charger adapters.	280.00
KVC-22	110~220 volt Fast rate DC vehicular charger adapter for KSC-35SK charger (charger not included)	49.20
CARRYING ACCESSORIES		LIST
KBH-10	Spring action belt clip	11.00
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-187	Nylon case for NX-1200/1300 srs (non-DTMF)	19.70
MICROPHONES & AUDIO ACCESSORIES		LIST
KMC-45D	MIL-SPEC, IP54/55 Speaker microphone (Built-in 2.5mm miniature earphone jack) Note: KMC-45 (Non D version) is not compatible with DMR (TDMA) operation.	115.30
KMC-21A	Compact speaker microphone	69.00
KEP-2	2.5mm earphone kit for KMC-17/45 Speaker Mic	74.50
KHS-7C	Single muff headset w/boom mic no PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	110.00
KHS-8BL	Two-Wire palm mic w/earphone (black)	146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black) Note: Available for Analog and NXDN (FDMA) only. NOT compatible with DMR (TDMA) operations.	237.00
KHS-10DC-BH	Hvy-duty Behind-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB	504.20
KHS-10DC-OH	Hvy-duty Over-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB	538.50
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver (low profile wire head band)	75.80
KHS-26	Clip Mic w/earphone	40.00

	NX-1200DV/1300DU (K3/K6) VHF/UHF DMR & FM Analog Portable Radios	Table of Contents
---	--	-----------------------------------

KHS-27A	D-Ring Ear Hanger w/PTT & Mic	35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic	42.70

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- [FPU & Software Applications](#): Software License Key Request Form
- [Radio Feature Licenses](#): Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features		LIST
KWD-1201CD	License Key for NXDN Conventional Conversion	49.50
	License Key for NXDN Type-D Trunking	12.00
KWD-1202TDK	Note: Requires KWD-1201CD (NXDN Conventional) enabled before applying NXDN Type-D Trunking license.	
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption Note: ARC4 Enhanced Encryption is available only in DMR mode.	39.70
KWD-1501RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	39.70

SERVICE RELATED ACCESSORIES		LIST
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile Note: Requires KPT-300LMC for authentication	122.80
KPG-22UM	USB Programming interface cable	212.30
E30-3410-05	2 pin Clone Cable	107.00

Contact Kenwood Parts for price and availability for listed parts

D32-0456-03	Channel stopper for NX-1000 series Basic(No Display) model	-
-------------	--	---

INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. <u>KPT-300LMC's History Menu will not display the Radio Features activated by Factory.</u>	129.70
L-5075	NX-1000 Series Portables Programming (with basic TX/RX check) Must submit <u>NX-x000 Series Programming Order Form</u> upon placing order for any programming services.	40.50

NX-1200AV/1300AU

VHF/UHF Digital Upgradeable Portable Radios

Table of Contents



All NX-1000 series portables include:

- Li-ion Battery (KNB-45L)
- Fast Charger (KSC-35SK)
- Antenna [KRA-26M(VHF)/27M(UHF)]
- Belt Clip (KBH-10)
- 2-PIN Connector Cap
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

Note:

1. To meet IP grades and MIL, the 2-pin connector cap or accessory must be installed.

STANDARD

GENERAL FEATURES

- 5 W (136-174 MHz) Models
- 5 W (400-470 MHz) Models
- 5 W (450-520 MHz) Models
- Analog Mode
- Optional NXDN Upgrade
- Optional DMR Upgrade
- AMBE+2™ VOCODER for optional digital modes
- 260 CH-GID / 128 Zones
- 64 CH-GID / 4 Zones (For Basic Models)
- Basic Models
- Standard Keypad Models w/ LCD
- 13-seg, 8-character LCD
- 7-color LED Indicator
- KENWOOD Audio Quality
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
 - Noise Suppressor
 - Microphone type selection
- Multiple Scan Functions
 - Dual Priority, Single, Zone, Multi, Scan
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 2 Side PF Keys
- 1W Speaker Audio
- VOX
- Emergency Call Features
 - Lone Worker
 - Max/Min Volume Setting
 - Voice Announcement
- Front Panel Programming Mode
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IP54/55 Water & Dust Intrusion

ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Uninhibit, Radio Check, Emergency
- QT / DQT
- Two-Tone
- DTMF
- Built-in Voice Inversion Scrambler (per channel)
- Built-in Compander (per channel)

DIGITAL – NXDN® MODE (Optional)

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- NXDN® Scrambler
- NXDN® ESN Validation (for Type-D System)
- Late Entry

DIGITAL – DMR MODE (Optional)

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- Over-the-Air Alias
- Late Entry
- ARC4 Encryption Option

OPTIONAL FEATURES

- NXDN Conventional Upgrade License (**KWD-1200CAK**)
- NXDN Type-D Trunking License (**KWD-1202TDK**) *Requires KWD-1200CAK enabled
- DMR Tier 2 Conventional Upgrade License (**KWD-1300CAK**)
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**) *Only applicable after DMR conversion
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license. Please download latest firmware from MyTools website > Product > Firmware

RADIO		LIST
NX-1200AVBK	VHF (136-174MHz), 5W, 64 CH, Basic, Analog	373.70
NX-1200AVBK2	VHF (136-174MHz), 5W, 260 CH, LCD & Standard Keypad, Analog	463.80
NX-1300AUBK	UHF (450-520MHz), 5W, 64 CH, Basic, Analog	373.70
NX-1300AUBK2	UHF (450-520 MHz), 5W, 260 CH, LCD & Standard Keypad, Analog	463.80
NX-1300AUBK4	UHF (400-470MHz), 5W, 64 CH, Basic, Analog	373.70
NX-1300AUBK5	UHF (400-470 MHz), 5W, 260 CH, LCD & Standard Keypad, Analog	463.80
ANTENNAS		LIST
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00

NX-1200AV/1300AU

VHF/UHF Digital Upgradeable Portable Radios

Table of Contents

KRA-27M3	UHF whip antenna 400-450 MHz	22.00
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30
KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-42M3	UHF stubby antenna 403-430 MHz	18.30
KRA-22M	VHF low profile antenna 148-162 MHz	22.00
KRA-22M2	VHF low profile antenna 162-174 MHz	22.00
KRA-22M3	VHF low profile antenna 136-150 MHz	22.00
KRA-23M	UHF low profile antenna 450-490 MHz	22.00
KRA-23M2	UHF low profile antenna 470-520 MHz	22.00
KRA-23M3	UHF low profile antenna 403-430 MHz	22.00
BATTERIES AND CHARGERS		LIST
KNB-45LK	2000 mAh, Li-ion battery - requires KSC-35K/SK charger	87.20
KNB-69L	2550 mAh, Li-ion battery - requires KSC-35K/SK charger	105.00
KNB-29N	1500 mAh, NiMH battery - requires KSC-43K charger	49.30
KSC-35SK	110~220 volt Fast rate single unit charger for KNB-45L/69L	42.20
KSC-43K	110~220 volt Fast rate single unit charger for KNB-29N/45L/69L	49.20
KMB-28AK	Six Unit Charger Adapter for the KSC-35SK chargers (chargers not included) Note: A supplied in-line AC-DC switching power supply with six DC plugs supply installed KSC-xx charger bases. This unit is lower profile and less weight than similar Kenwood six unit charger adapters.	280.00
KVC-22	110~220 volt Fast rate DC vehicular charger adapter for KSC-35SK charger (charger not included)	49.20
CARRYING ACCESSORIES		LIST
KBH-10	Spring action belt clip	11.00
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-187	Nylon case for NX-1200/1300 srs	19.70
MICROPHONES & AUDIO ACCESSORIES		LIST
KMC-45D	MIL-SPEC, IP54/55 Speaker microphone (Built-in 2.5mm miniature earphone jack)	115.30
KMC-21A	Compact speaker microphone	69.00
KEP-2	2.5mm earphone kit for KMC-17/45 Speaker Mic	74.50
KHS-7C	Single muff headset w/boom mic no PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	110.00
KHS-8BL	Two-Wire palm mic w/earphone (black)	146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black) Note: Available for Analog and NXDN (FDMA) only. NOT compatible with DMR (TDMA) operations.	237.00
KHS-10DC-BH	Hvy-duty Behind-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB	504.20
KHS-10DC-OH	Hvy-duty Over-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB	538.50
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver (low profile wire head band)	75.80
KHS-26	Clip Mic w/earphone	40.00
KHS-27A	D-Ring Ear Hanger w/PTT & Mic	35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic	42.70

NX-1200AV/1300AU

VHF/UHF Digital Upgradeable Portable Radios

Table of Contents

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features		LIST
KWD-1200CAK	License Key for NXDN Conventional Upgrade	49.50
KWD-1202TDK	License Key for NXDN Type-D Trunking Note: Requires KWD-1200CAK (NXDN Conventional) enabled before applying NXDN Type-D Trunking license.	12.00
KWD-1300CAK	License Key for DMR Tier2 Conventional Upgrade	49.50
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption Note: ARC4 Enhanced Encryption is available only in DMR mode.	39.70
KWD-1501RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	39.70

SERVICE RELATED ACCESSORIES		LIST
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile Note: Requires KPT-300LMC for authentication	122.80
KPG-22UM	USB Programming interface cable	212.30
E30-3410-05	2 pin Clone Cable	107.00

<i>Contact Kenwood Parts for price and availability for listed parts</i>		
D32-0456-03	Channel stopper for NX-1000 series Basic(No Display) model	-

INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. <u>KPT-300LMC's History Menu will not display the Radio Features activated by Factory.</u>	129.70
L-5075	NX-1000 Series Portables Programming (with basic TX/RX check) Must submit <u>NX-x000 Series Programming Order Form</u> upon placing order for any programming services.	40.50

NX-1202AV/1302AU

VHF/UHF Digital Upgradeable Portable Radios

Table of Contents



All NX-1000 series portables include:

- Li-ion Battery (KNB-45L)
- Fast Charger (KSC-35SK)
- Antenna [KRA-26M(VHF)/27M(UHF)]
- Belt Clip (KBH-10)
- 2-PIN Connector Cap
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

STANDARD

■ GENERAL FEATURES

- 2 W (136-174 MHz) Models
- 2 W (450-520 MHz) Models
- Analog Mode
- Optional NXDN Upgrade
- Optional DMR Upgrade
- AMBE+2™ VOCODER for optional digital modes
- 64 CH-GID / 4 Zones
- Basic Models
- 7-color LED Indicator
- KENWOOD Audio Quality
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
 - Noise Suppressor
 - Microphone type selection
- Multiple Scan Functions
 - Dual Priority, Single, Zone, Multi, Scan
- On/Off Volume Knob
- 16-Position Mechanical Selector
- 2 Side PF Keys
- 1W Speaker Audio
- VOX
- Emergency Call Features
- Lone Worker
- Max/Min Volume Setting
- Voice Announcement
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IP54/55 Water & Dust Intrusion

■ ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Uninhibit, Radio Check, Emergency
- QT / DQT
- Two-Tone
- DTMF
- Built-in Voice Inversion Scrambler (per channel)
- Built-in Compander (per channel)

■ DIGITAL – NXDN® MODE (Optional)

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- NXDN® Scrambler
- NXDN® ESN Validation (for Type-D System)
- Late Entry

■ DIGITAL – DMR MODE (Optional)

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check, & Control
- Over-the-Air Alias (TX only / No display)
- Late Entry
- ARC4 Encryption Option

OPTIONAL FEATURES

- NXDN Conventional Upgrade License (**KWD-1200CAK**)
- NXDN Type-D Trunking License (**KWD-1202TDK**) *Requires KWD-1200CAK enabled
- DMR Tier 2 Conventional Upgrade License (**KWD-1300CAK**)
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**) *Only applicable after DMR conversion
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license. Please download latest firmware from MyTools website > Product > Firmware

RADIO		LIST
NX-1202AVBK	VHF (136-174MHz), 2W, 64 CH, Basic Model, Analog	337.20
NX-1302AUBK	UHF (450-520MHz), 2W, 64 CH, Basic Model, Analog	337.20
ANTENNAS		LIST
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-27M	UHF whip antenna 440-490 MHz	22.00
KRA-27M2	UHF whip antenna 470-520 MHz	22.00
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-42M	UHF stubby antenna 440-490 MHz	18.30

NX-1202AV/1302AU

VHF/UHF Digital Upgradeable Portable Radios

Table of Contents

KRA-42M2	UHF stubby antenna 470-520 MHz	18.30
KRA-22M	VHF low profile antenna 148-162 MHz	22.00
KRA-22M2	VHF low profile antenna 162-174 MHz	22.00
KRA-22M3	VHF low profile antenna 136-150 MHz	22.00
KRA-23M	UHF low profile antenna 450-490 MHz	22.00
KRA-23M2	UHF low profile antenna 470-520 MHz	22.00
BATTERIES AND CHARGERS		LIST
KNB-45LK	2000 mAh, Li-ion battery - requires KSC-35K/SK charger	87.20
KNB-69L	2550 mAh, Li-ion battery - requires KSC-35K/SK charger	105.00
KNB-29N	1500 mAh, NiMH battery - requires KSC-43K charger	49.30
KSC-35SK	110~220 volt Fast rate single unit charger for KNB-45L/69L	42.20
KSC-43K	110~220 volt Fast rate single unit charger for KNB-29N/45L/69L	49.20
KMB-28AK	Six Unit Charger Adapter for the KSC-35SK chargers (chargers not included) Note: A supplied in-line AC-DC switching power supply with six DC plugs supply installed KSC-xx charger bases. This unit is lower profile and less weight than similar Kenwood six unit charger adapters.	280.00
KVC-22	110~220 volt Fast rate DC vehicular charger adapter for KSC-35SK charger (charger not included)	49.20
CARRYING ACCESSORIES		LIST
KBH-10	Spring action belt clip	11.00
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-187	Nylon case for NX-1200/1300 srs	19.70
MICROPHONES & AUDIO ACCESSORIES		LIST
KMC-45D	MIL-SPEC, IP54/55 Speaker microphone (Built-in 2.5mm miniature earphone jack)	115.30
KMC-21A	Compact speaker microphone	69.00
KEP-2	2.5mm earphone kit for KMC-17/45 Speaker Mic	74.50
KHS-7C	Single muff headset w/boom mic no PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	110.00
KHS-8BL	Two-Wire palm mic w/earphone (black)	146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black) Note: Available for Analog and NXDN (FDMA) only. NOT compatible with DMR (TDMA) operations.	237.00
KHS-10DC-BH	Hvy-duty Behind-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB	504.20
KHS-10DC-OH	Hvy-duty Over-the-head Headset W/boom Mic Earcup-mounted PTT with NRR of 24dB	538.50
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver (low profile wire head band)	75.80
KHS-26	Clip Mic w/earphone	40.00
KHS-27A	D-Ring Ear Hanger w/PTT & Mic	35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic	42.70

NX-1202AV/1302AU

VHF/UHF Digital Upgradeable Portable Radios

Table of Contents

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features		LIST
KWD-1200CAK	License Key for NXDN Conventional Upgrade	49.50
KWD-1202TDK	License Key for NXDN Type-D Trunking Note: Requires KWD-1200CAK (NXDN Conventional) enabled before applying NXDN Type-D Trunking license.	12.00
KWD-1300CAK	License Key for DMR Tier2 Conventional Upgrade	49.50
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption Note: ARC4 Enhanced Encryption is available only in DMR mode.	39.70
KWD-1501RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	39.70

SERVICE RELATED ACCESSORIES		LIST
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile Note: Requires KPT-300LMC for authentication	122.80
KPG-22UM	USB Programming interface cable	212.30
E30-3410-05	2 pin Clone Cable	107.00

<i>Contact Kenwood Parts for price and availability for listed parts</i>		
D32-0456-03	Channel stopper for NX-1000 series Basic(No Display) model	-

INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. <u>KPT-300LMC's History Menu will not display the Radio Features activated by Factory.</u>	129.70
L-5075	NX-1000 Series Portables Programming (with basic TX/RX check) Must submit <u>NX-x000 Series Programming Order Form</u> upon placing order for any programming services.	40.50

NEXEDGE®

NX-3210R - for Class I, II, III Railroads

VHF Digital & FM Analog Portables (w/ Built-In GPS)

Table of Contents



NX-3210R series portable include:

- Belt Clip (KBH-11)
- Universal Connector Cap
- Channel Stopper
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

Order packages to include Battery, Charger & Antenna, or purchase Battery, Charger, and Antenna separately.

GENERAL FEATURES

- 5 W (136-174 MHz) Model
- Mixed Protocol: NXDN Conventional, FM Analog and NXDN Type-C & Gen2 Trunking
- 512 CH-GID (1000 CH option) / 128 Zones
- Cross Keys and 16-Key Keypad Model
- 4-line basic frame
- 14 Character and 5-line text message frame
- Display in 3 languages (English/Spanish/French)
- 12-/24-hr clock and date display
- 7-color Light Bar
- Built-in Bluetooth® 4.0
- Transmit/Busy/Call Alert/Warn LED
- On/Off Volume Knob
- 2 Side PF Keys
- Emergency/AUX Key
- 1W Speaker Audio at 5% distortion
- GPS Data with built-in GPS
- KPG-D9R Windows® FPU
- MIL-STD-810 C/D/E/F/G/H
- IP54/55 Water & Dust Intrusion
- PC Serial Interface
- SDM Manual Input
- Transparent Data Mode
- Voice Guide/Voice & GPS Data storage with internal memory
- RSSI information is included in GPS Data (Conventional mode)
- AAR functions and channels
- Feedback Suppression

DIGITAL – GENERAL

- NXDN® Digital Air Interface
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming (included in AAR mode)
- Paging Call
- Emergency Call
- All Group Call
- Status Messaging
- Remote Stun/Kill
- Remote Check
- Short & Long Data Messages
- GPS Data with Voice
- NXDN® Scrambler Included
- AES & DES Encryption (W/ KPG-DE1/AE1 and

DIGITAL – CONVENTIONAL MODE

- 64 Radio Access Numbers (RAN)
- Individual & Group Selective Call
- Mixed FM/Digital Operation
- Conventional IP Networks
- Site Roaming

DIGITAL – TRUNKING MODE

- Individual Private Call
- Group Call & Broadcast Call
- Transmission Trunked Mode
- Message Trunked Mode
- Call Queuing with Priority
- 4 Priority Monitor ID's
- Remote Group Add
- Fail Soft Mode

DIGITAL - MULTI-SITE IP NETWORKS

- 60,000 GIDs / UIDs
- Wide Area Group Call
- Auto Roaming Registration
- Group Registration

MULTI-SYSTEM COMPATIBLE

- 24-trunked Networks
- UID List for each network

SCAN

- Single Zone / Multi-Zone / List Scan
- Dual Priority Scan (Conventional)

ANALOG MODE – GENERAL

- 25 & 12.5 kHz Channels
- Conventional & LTR® Zones
- FleetSync®/II, MDC-1200, DTMF
- QT / DQT & Two-Tone (Conventional Zones Only)
- Voice Inversion Scrambler

FleetSync®/II (FM)

- PTT ID ANI / Caller ID
- Selective / Group Call
- Emergency Status / Text Messages

MDC-1200

- PTT ID ANI / Caller ID
- Emergency / Radio Check & Inhibit

RADIO		LIST
NX-3210RK3	136-174MHz 5/4/1W, 14 characters Alphanumeric LCD, Cross Keys, Large Full Keypad Note: Copy of customer PO is required upon PO placement for this radio	975.80
PACKAGE		LIST
NX-3210RK3-LKP	136-174MHz 5/4/1W, 14 characters Alphanumeric LCD, Cross Keys, Large Full Keypad VHF Li-Ion Battery Package (NX-3210RK3 + KNB-L2M + KSC-52BK + KRA-26M)	1,290.60
General Radio Features		LIST
KWD-3000CH	License Key for 1000 Channel Expansion	190.20
KWD-3001FP	License Key for Front Panel Programming	148.50
KWD-3503AE	License Key for AES/DES Encryption Note: 1. Factory Installation only. Must order L-5054. 2. Requires KPG-AE1/DE1 software key loader to encrypt. 3. KWD-3503AE is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Please see descriptions at the bottom.	534.70
KWD-3505DE	License Key for DES Encryption Note: Requires KPG-AE1/DE1 software key loader to load encryption keys	118.80
KWD-3504RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	47.50

NEXEDGE®

NX-3210R - for Class I, II, III Railroads

VHF Digital & FM Analog Portables (w/ Built-In GPS)

Table of Contents

ANTENNAS		LIST
KRA-26M	VHF helical antenna 146-162 MHz	22.00
KRA-26M2	VHF helical antenna 162-174 MHz	22.00
KRA-26M3	VHF helical antenna 136-150 MHz	22.00
KRA-22M	VHF low-profile helical antenna 148-162 MHz	22.00
KRA-22M2	VHF low-profile helical antenna 162-174 MHz	22.00
KRA-22M3	VHF Low-profile helical antenna 136-150 MHz	22.00
KRA-41M	VHF stubby antenna 148-162 MHz	18.30
KRA-41M2	VHF stubby antenna 162-174 MHz	18.30
KRA-41M3	VHF stubby antenna 136-150 MHz	18.30
KRA-25	High gain VHF helically loaded whip antenna 148-162 MHz	46.00
KRA-28	Broad-band VHF helically loaded whip antenna 140-170 MHz	56.30
BATTERIES AND CHARGERS		LIST
KNB-L1M	Li-ion 2000mAh (Compact Slim)	158.30
KNB-L2M	Li-ion 2600mAh (Standard)	185.80
KNB-L11M	Li-ion 3900mAh (High Capacity) Note: The KNB-L11 battery requires NX-5x00 firmware 5.12 or newer	240.50
KNB-L12M	Laminated Li-ion 3000mAh (High Capacity)	210.00
KNB-L13M	Laminated Li-ion 4000mAh (High Capacity)	266.00
KSC-52BK	Rapid rate single unit charger for KNB-L1/KNB-L2/KNB-L3/KNB-LS5/KNB-LS7/KNB-33L/PB-45L/KNB-47L/KNB-48L/KNB-72LC/KNB-70LEX/KNB-41NC/KNB-50NC/KNB-54N	107.00
KSC-52AK	Rapid rate single unit charger for the new KNB-L11/L12/L13 high capacity battery	107.00
6 Unit Chargers		
KSC-526K	Rapid rate 6-unit charger CEC Compliant Note: Requires charging pocket KSC-52PBW and/or KSC-52PCW, and/or KSC-52PAW	906.20
KSC-52PBW	Charging pocket for KSC-526K and/or to convert the pocket style of a KSC-52 Single unit charger compatible with the KNB-L1, L2, L3, LS5 and LS7 batteries, and NX-205/305 and NX-210 series	12.00
KSC-52PAW	Charging pocket for KSC-526K and/or to convert the pocket style of a KSC-52 Single unit charger compatible with the KNB-L11/L12/L13 battery	12.00
KMB-526K	Wall Mount Bracket for KSC-526K	91.50
Vehicle Chargers/Adapters		
KVC-52	Rapid rate DC vehicular charger adapter for the KSC-52BK/52AK chargers (chargers not included; includes steel mounting base & locking bracket, and DC cable with a fused cigarette lighter plug)	208.30
KVC-23A	Rapid rate DC vehicular charger for TK-5x10/5x20, NX-5x00/x00/x10/x20/3210, TK-x180, TK-x170, & TK-x360 portables with Lithium Ion /Lithium Polymer/NiMH packs only Note: Compatible with KNB-L11 battery	402.70
CARRYING ACCESSORIES		LIST
KBH-11	Spring action belt clip (2.5")	19.70
KBH-8DS	Leather swivel belt loop with portable D-Ring attachment	35.20
KLH-6SW	Leather swivel belt loop / detachable swivel D-Ring back	29.50
KLH-137ST	Firemen's Heavy-Duty Leather Shoulder Strap for a Heavy-Duty Leather Case	49.30
KLH-154K2	Heavy duty leather carrying case for NX-3210/NX-210 Note: No belt loop flap is included. Must order KLH-6SW for belt loop.	59.20

NEXEDGE®

NX-3210R - for Class I, II, III Railroads

VHF Digital & FM Analog Portables (w/ Built-In GPS)

Table of Contents

MICROPHONES & AUDIO ACCESSORIES		LIST
KMC-70M	MIL-SPEC, IP54/55/67/68* Speaker Mic with Active Noise Reduction Note: IP68 is available only when used with NX-5000 series portable	174.20
KMC-72W	MIL-SPEC, IP54/55/67 Noise-cancelling Speaker Mic Note: IP67 is for the microphone	133.80
KEP-1	3.5mm earphone kit for KMC-41/42W/54W/70M/72W Speaker Mics	74.50
KHS-11BL	2-wire palm mic w/earphone, universal connector (Black)	223.20
KHS-12BL	3-wire mini lapel mic w/earphone, universal connector (Black) Note: Not compatible with TDMA operations	283.70
KHS-14C	Lt. Wt. Single muff headset w/boom mic & In-line PTT Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)	155.80
KHS-15DC-BH	Hvy-duty behind-the-headset w/boom mic & earcup-mounted PTT with NRR of 24dB [Intrinsically Safe Option]	611.00
KHS-15D-OH	Hvy-duty noise reduction over-the-headset w/noise cancelling boom mic & PTT	522.80
SOFTWARE & USB OPTIONS		LIST
KPG-D9RK	License Key for KPG-D9RK Programming Software for NX-3210R Portable Note: Simplified License only - must have a customer string or submit L-5098 request form	184.00
KPG-AE1K	License Key for AES/DES Encryption Software Key Loader for KWD-3503AE Note: - Requires KPT-300LMC for authentication - KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A).	649.10
KPG-DE1K	License Key for DES Encryption Software Key Loader for KWD-3505DE Note: - Requires KPT-300LMC for authentication	436.50
KPG-36XM	Full Speed USB Programming interface cable	212.30
INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. <u>KPT-300LMC's History Menu will not display the Radio Features activated by Factory.</u>	129.70
L-5002	NX-3210R Programming (with basic TX/RX check) Must submit <u>NX-x000 Series Programming Order Form</u> upon placing order for any programming services.	40.50
L-5054	Installation AES/DES for NX-3210R Portable	27.00

-- IMPORTANT NOTES regarding ENCRYPTION SOFTWARE OPTION--

Encryption Software Option, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

JVCKENWOOD may request the following information to be submitted at time of order (this information must meet JVCKENWOOD internal approvals prior to shipment even if being returned to JVCKENWOOD later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination
(customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

c) Intended Use of Radios: Law enforcement, security, operations, etc.

ProTalk®

PKT-300

UHF BRS Portable Radios

Table of Contents



Includes:

- Belt Clip Holster
- Drop-in charger
- Fixed Antenna
- 2,200 mAh Li-ion Battery
- Instruction Manual
- Standard Warranty: 2 Years*

* All Accessories / options: 1 Year

GENERAL FEATURES

- UHF 2.0 Watt or 500 mW Transmit Power
- Small (1.97" W x 1.06" D x 3.86" H) & Lightweight (4.87 oz)
- Li-Ion battery with up to 18 Hours Talk Time (5/5/90 duty cycle, battery saver on)
- 6 Channel Operation (factory pre-set)
- 99 User-Programmable Memory Bank Frequencies
- Channel Scan
- Wireless Cloning Mode (Not clonable with PKT-23K and TK-3230DXK)
- Key Lock/Super Lock
- User Programmable QT (45) and DQT (174) Signaling
- Selectable Power On Tone (3 options)
- 10 Call Alert Tones
- Voice Scrambler (Privacy function)
- Speaker Mute Function
- Compander
- SelCall for Caller ID (Available in future)
- LCD Battery Meter & Low Battery Alert
- VOX (Voice-activated transmit)
- Time Out Timer
- 2 Color Transmit / Busy LED/ Backlit LCD Display
- 3 Function Keys: Menu, Call, Monitor
- 2-PIN Audio Accessory Jack
- Antenna (fixed non-removable)
- Passes IP52 & 8 Rugged Mil-Spec 810 C, D, E, F, G & H Standards
- FCC License required
- 2 Year Radio Warranty

Due to spurious signal (birdie), the following frequency (and $\pm 10\text{kHz}$ ranges) are not allowed:

- 468.000MHz $\pm 10\text{kHz}$ (467.99 ~ 468.01MHz)

RADIO		*MAP	LIST
PKT-300K	450-470 MHz UHF 2.0W or 500 mW, 6 Ch. Compact Portable Transceiver	195.00	229.80
BATTERY AND CHARGER			LIST
KNB-81LW	Li-Ion battery (Same as supplied with PKT-300K)		69.20
KSC-50K	Li-Ion Rapid rate charger (Same as supplied with PKT-300K)		42.30
KSC-44MLKS	AC Adapter (For cradle multi unit use, up to 6 units)		53.70
KSC-506K	Rapid rate 6-Unit Charger for KNB-81L		244.30
CARRYING ACCESSORY			LIST
KBH-23M	Belt Clip Holster (Same as supplied with PKT-300K)		18.70
KBH-21W	Belt Clip		12.50
HEADSETS, MICROPHONE AND SPEAKERS			LIST
KMC-21A	Compact speaker microphone		69.00
KMC-45D	Speaker microphone (Built-in 2.5mm miniature earphone jack)		115.30
KHS-22A	Behind-the-Head Headset with flexible boom mic and in-line PTT single ear receiver; low profile wire head band; VOX-ready		75.80
KHS-26	Clip Mic w/earphone		40.00
KHS-27A	D-Ring Ear Hanger w/PTT & Mic		35.00
KHS-31C	C-Ring Ear Hanger w/PTT & Mic		42.70
KEP-2	2.5mm earphone kit for KMC-45 Speaker Mic (Black only)		74.50
KHS-8BL	Two-Wire palm mic w/earphone (black)		146.70
KHS-9BL	Three-Wire lapel mic w/earphone (black)		237.00
KHS-7C	Single muff headset w/boom mic No PTT (black) Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)		85.70
KHS-7AC	Lt. Wt Single muff headset w/boom mic & in-line PTT (black) Note: Operating & Storage temperature is -4°F to 122°F (-20°C to 50°C)		110.00

ProTalk®		PKT-300	Table of Contents
		UHF BRS Portable Radios	
PROGRAMMING SOFTWARE/CABLE			LIST
KPG-208DK	Windows® 10 & 11, Programming software for PKT-300		346.50
KPG-22UM	USB to 2-Pin Programming interface cable		212.30

-- NOTES --

* Please see Kenwood's ProTalk® MAP (Minimum Advertised Price) policy.



NX-5700/5800/5900

Table of Contents

VHF/UHF/700/800MHz Digital & FM Analog Mobile Radios



NX-5000(K-version*) Mobiles include:

- Basic Control Head (KCH-19M)
- Standard Microphone (KMC-65M)
- Mounting Bracket (KMB-33M)
- DC Cable
- Blade Fuse
- User Guide
- Premium Warranty: 3 Years

All Accessories / options: 1 Year

*BK-version comes with a RF deck only
1. Multi Digital Protocol can be used for two(2) of the three(3) Digital Protocols set by programming software. P25/DMR Digital Protocols are options.

2. Requires **KCT-91MRS** DB25 Cable between Decks.

STANDARD

GENERAL FEATURES

- 50 W (136-174 MHz) Models
- 45 W (380-470, 450-520 MHz) Models
- 35 W (700/800 MHz) Models
- 1024 CH-GID / 128 Zones
- Full Color 2.55" (154 x 422 pixels) TFT Display
- Multi-line Text Display
- Function/Status Icons
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- Transmit/Busy/Call Alert/Warn LED
- Emergency/AUX Key
- 4W Speaker Audio
- DB-25 Accessory Connector
- Multi Digital Protocol ¹
- Emergency Call Features
- Built-in GPS Receiver
- Built-in Bluetooth® Module
- Built-in 56-bit DES Encryption (4 keys programmable by KPG-D1(N)K)
- Mobile Relay Station² (DMR Mode³)
- Cross Band Repeater (Only)
- Active Noise Reduction (ANR)
- KPG-D1N Windows® FPU
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IP54/55

DIGITAL – P25 MODE

- P25 Conventional Option
- P25 Phase 1 Trunking Option
- P25 Phase 2 Trunking Option
- Conv/Trunking OTAR Option
- Conventional Voting Scan Option
- Packet Data Option for P25 OTAR, GPS & OTAP
- Text Data
- Radio Authentication
- Tone Paging

DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking (except 700MHz)
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming (requires KPG-180AP OTAP Manager Software)
- Paging Call
- Emergency Call
- All Group Call
- Digital Two-Tone
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

DIGITAL – DMR MODE

- DMR Tier 2 Conventional Option
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Optional
- Site Roaming

ANALOG MODE

- Conventional Zones
- LTR® Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF
- Built-in Voice Inversion Scrambler

Multi-Deck Compatible Models & Modes

Models	Bands	Power	Operable Modes
NX-5600H	Lowband VHF (39-50)	110 Watts	Analog/NXDN
NX-5700	VHF (136-174)	50 Watts	Analog/NXDN/DMR/P25
NX-5700H	VHF (136-174)	110 Watts	Analog/NXDN/P25
NX-5800H	UHF (380-470, 450-520)	100 Watts	Analog/NXDN/P25
NX-5800	UHF (380-470, 450-520)	50 Watts	Analog/NXDN/DMR/P25
NX-5900	7/800	35 Watts	Analog/NXDN/DMR/P25

OPTIONAL FEATURES & CONFIGURATIONS

GENERAL FEATURES

- 4000 Channel (**KWD-5000CH**)
- Front Panel Programming (**KWD-5001FP**)
- microSD/microSDHC Memory Card Slot (**KWD-5002SD**)
- Built-in Bluetooth® Module for Data (**KWD-5003BT**)
- Remote Control by Subscriber Units (**KWD-5007RC**)
- 256-bit AES Encryption (**KWD-AE30K/31K** Encryption Module required)

DIGITAL – P25 MODE

- Conventional Features (**KWD-5100CV**)
- Phase 1 Trunking Features (**KWD-5100CV** & **5101TR**)
- Phase 2 Trunking Features (**KWD-5100CV** & **5101TR** & **5102TR**)
- Conventional OTAR (**KWD-5103RK**)
- Trunking OTAR (**KWD-5103RK** & **5106DT**)
- Conventional Voting Scan (**KWD-5105VT**)
- Packet Data required for Trunked OTAR/GPS/OTAP (**KWD-5106DT**)
- P25 ARC4 Encryption (**KWD-5107EE**)
- Link Layer Authentication (**KWD-5100CV** & **KWD-5101TR** & KWD-AE3x Encryption Board Required)

DIGITAL – DMR MODE

- DMR Tier 2 Conventional and Trunking 2.5 Features (**KWD-5300CV**)
- DMR Tier 3 Trunking Features (**KWD-5300CV** & **KWD-5301TR**)

MOUNTING & REMOTE CONFIGURATIONS

(See NX-5000 Accessory page for details)

- **KCH-20R** Featured Control Head
- **KCH-21R** Handheld Control Head
- Single Remote Control Head (KRK Kit & **KCT-71** or **KCT-77** Cable required)
- Dual Remote Control Heads (**KCH-19/20R/21R** & **KRK Kit** & **KCT-71** or **KCT-77** Cables required)
- Multiple RF Decks (KRK Kit & **KCT-71** or **KCT-77** Control Cable + **KWD-5004MR** License Key Activation required*)



	NX-5700/5800/5900 VHF/UHF/700/800MHz Digital & FM Analog Mobile Radios	Table of Contents
---	--	--

RADIO		LIST
NX-5700K	VHF (136-174MHz), 50 Watts NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking	1300.50
NX-5800K	UHF (450-520MHz), 45 Watts NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking	1300.50
NX-5800K2	UHF (380-470MHz), 45 Watts NXDN Conventional / TYPE-C (Gen1/Gen2) Trunking	1300.50
NX-5900K	700 / 800 MHz, 30/35 Watts NXDN Conventional / 800MHz TYPE-C (Gen1/Gen2) Trunking	1658.00

RF Deck Only		LIST
<i>MUST purchase necessary accessories separately</i>		
NX-5700BK	VHF (50W, 136-174 MHz) RF Deck Only	956.00
NX-5800BK	UHF (45W, 450-520 MHz) RF Deck Only	956.00
NX-5800BK2	UHF (45W, 380-470 MHz) RF Deck Only	956.00
NX-5900BK	35W, 700/800 MHz RF Deck Only	1313.70

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- [FPU & Software Applications](#): Software License Key Request Form
- [Radio Feature Licenses](#): Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

General Radio Features		LIST
KWD-5000CH	License Key for 4000 Channel Expansion	499.00
KWD-5001FP	License Key for Front Panel Programming	356.30
KWD-5002SD	License Key for microSD Memory Card Slot Activation	124.70
KWD-5003BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-5003BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-5004MR	License Key for Multiple RF Decks Receiver Note: Required ONLY for the radios with S/N: B5900000 or earlier.	N/C
KWD-5007RC	License Key for Remote Control by Subscriber Units Note: - P25 Mode is <u>NOT</u> available. - This license may be used by Administrator due to Stun/Revive/Kill. - The license is required for only Transmitting of Remote Control. - PC command for Remote Control does <u>NOT</u> require the license.	47.50

P25 Radio Features		LIST
KWD-5100CV	License Key for P25 Conventional	683.20
KWD-5101TR	License Key for P25 Phase 1 Trunking (requires KWD-5100CV) Note: Required for Link Layer Authentication	617.80
KWD-5102TR	License Key for P25 Phase 2 Trunking (requires KWD-5100CV & KWD-5101TR)	475.20
KWD-5103RK	License Key for P25 OTAR (requires KWD-5106DT for a Trunking Operation)	831.70
KWD-5105VT	License Key for P25 Conventional Voting Scan	142.70
KWD-5106DT	License Key for P25 Trunking OTAR / GPS / OTAP Note: Conventional (OTAR/GPS/OTAP) does NOT require KWD-5106DT.	213.80
KWD-5107EE	License Key for P25 ARC4 Enhanced Encryption	NC

DMR Features		LIST
KWD-5300CV	License Key for DMR Tier 2 Conventional and Trunking 2.5	71.30
KWD-5301TR	License Key for DMR Tier 3 Trunking (requires KWD-5300CV)	158.30
KWD-5500EE	License Key for DMR ARC4 Enhanced Encryption	47.50

Other Accessories, Software, and Services

Refer to NX-5000 series mobile accessory pages



NX-5700H/5800H

VHF/UHF Digital & FM Analog Mobile Radio

Table of Contents



NX-5000HBF Mobiles include:

- High Power Radio
- User Guide
- Premium Warranty: 3 Years

All Accessories / options: 1 Year

STANDARD

GENERAL FEATURES

- 110 W (136 -174 MHz) Model
- 100 W (380 - 450, 450 - 520 MHz) Model
- 1024 CH-GID / 128 Zones
- Multi-Digital Operation in NXDN/P25
- Support NX-5000 Remote Control Head Options
- Multi-RF Deck Configuration Available (Lowband, VHF, 380-470, 450-520, 7&800)
- Built-in Micro USB A-B Interface
- Horn Alert / Public Address
- Built-in GPS Receiver
- Built-in Bluetooth® Module
- Built-in 56-bit DES Encryption (4 keys programmable by KPG-D1N)
- Optional 256-bit AES Encryption
- 12 Watt Audio Output
- DB-25 & Molex 9-pin Accessory Connector
- Active Noise Reduction (ANR)
- KPG-D1N Windows® FPU
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G

DIGITAL – P25 MODE

- P25 Conventional
- P25 Phase 1 Trunking Option
- P25 Phase 2 Trunking Option
- Conv/Trunking OTAR Option
- Packet Data Option for P25 OTAR, GPS & OTAP
- Conventional Voting Scan Option
- Text Data
- Radio Authentication
- Tone Paging
- ARC4 Encryption Option

DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking Option
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming (requires KPG-180AP OTAP Manager Software)
- Paging Call
- Emergency Call
- All Group Call
- Digital Two-Tone
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

ANALOG MODE

- Conventional Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF
- Built-in Voice Inversion Scrambler

OPTIONAL FEATURES & CONFIGURATIONS

GENERAL FEATURES

- 4000 Channel (KWD-5000CH)
- Front Panel Programming (KWD-5001FP)
- microSD/microSDHC Memory Card Slot (KWD-5002SD)
- Built-in Bluetooth® Module for Data (KWD-5003BT)
- Remote Control by Subscriber Units (KWD-5007RC)
- 256-bit AES Encryption (KWD-AE30K/31K Encryption Module required)

DIGITAL – P25 MODE

- Conventional Features (Factory Installed)
- Phase 1 Trunking Features (KWD-5101TR)
- Phase 2 Trunking Features (KWD-5101TR & 5102TR)
- Conventional OTAR (KWD-5103RK)
- Trunking OTAR (KWD-5103RK & 5106DT)
- Conventional Voting Scan (KWD-5105VT)
- Packet Data required for Trunked OTAR/GPS/OTAP (KWD-5106DT)
- P25 ARC4 Encryption (KWD-5107EE)
- Link Layer Authentication (KWD-5101TR & KWD-AE3x Encryption Board Required)
- One active key per system, up to 32 systems

DIGITAL – NXDN MODE

- Conventional Features (Factory Installed)
- Type-C Trunking Features (KWD-5201TR)

Multi-Deck Compatible Models & Modes

Models	Bands	Power	Operable Modes
NX-5600H	Lowband VHF (39-50)	110 Watts	Analog/NXDN
NX-5700	VHF (136-174)	50 Watts	Analog/NXDN/DMR/P25
NX-5700H	VHF (136-174)	110 Watts	Analog/NXDN/P25
NX-5800H	UHF (380-470, 450-520)	100 Watts	Analog/NXDN/P25
NX-5800	UHF (380-470, 450-520)	50 Watts	Analog/NXDN/DMR/P25
NX-5900	7/800	35 Watts	Analog/NXDN/DMR/P25

MOUNTING & REMOTE CONFIGURATIONS

(See NX-5000 Accessory page for details)

- KCH-19 Basic Control Head
- KCH-20R Featured Control Head
- KCH-21R Handheld Control Head
- Single Remote Control Head (KRK Kit & KCT-71 or KCT-77 Cable required)
- Dual Remote Control Heads (KCH-19/20R/21R & KRK Kit & KCT-71 or KCT-77 Cables required)
- Multiple RF Decks (KRK Kit & KCT-71 or KCT-77 Control Cable)



NX-5700H/5800H

VHF/UHF Digital & FM Analog Mobile Radio

[Table of Contents](#)

RF Deck Only		LIST
<i>MUST purchase necessary accessories separately</i>		
NX-5700HBF	NX-5700HBF (110W, 136-174 MHz) RF Deck Only, NXDN Conv & P25 Conv (Remote Control Head, Microphone, Bracket, DC Cable not included)	2678.80
NX-5800HBF	NX-5800HBF (100W, 450-520 MHz) RF Deck Only, NXDN Conv & P25 Conv (Remote Control Head, Microphone, Bracket, DC Cable not included)	2678.80
NX-5800HBF2	NX-5800HBF2 (100W, 380-470 MHz) RF Deck Only, NXDN Conv & P25 Conv (Remote Control Head, Microphone, Bracket, DC Cable not included)	2678.80

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

General Radio Features		LIST
KWD-5000CH	License Key for 4000 Channel Expansion	499.00
KWD-5001FP	License Key for Front Panel Programming	356.30
KWD-5002SD	License Key for microSD Memory Card Slot Activation	124.70
KWD-5003BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-5003BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-5007RC	License Key for Remote Control by Subscriber Units Note: - P25 Mode is <u>NOT</u> available. - This license may be used by Administrator due to Stun/Revive/Kill. - The license is required for only Transmitting of Remote Control. - PC command for Remote Control does <u>NOT</u> require the license.	47.50

P25 Radio Features		LIST
KWD-5101TR	License Key for P25 Phase 1 Trunking Note: Required for Link Layer Authentication	617.80
KWD-5102TR	License Key for P25 Phase 2 Trunking (requires KWD-5101TR)	475.20
KWD-5103RK	License Key for P25 OTAR (requires KWD-5106DT for a Trunking Operation)	831.70
KWD-5105VT	License Key for P25 Conventional Voting Scan	142.70
KWD-5106DT	License Key for P25 Trunking OTAR / GPS / OTAP Note: Conventional (OTAR/GPS/OTAP) DO NOT require KWD-5106DT.	213.80
KWD-5107EE	License Key for P25 ARC4 Enhanced Encryption	NC

NXDN Radio Features		LIST
KWD-5201TR	License Key for NXDN Type-C Trunking	83.20

Other Accessories, Software, and Services

Refer to NX-5000 series mobile accessory pages



NX-5600H

Lowband Digital & FM Analog Mobile Radio

Table of Contents



NX-5000HBF Mobiles include:

- High Power Radio
- User Guide
- Premium Warranty: 3 Years

All Accessories / options: 1 Year

STANDARD

GENERAL FEATURES

- 110 W (39-50 MHz) Model
- 1024 CH-GID / 128 Zones
- Analog / NXDN Digital Operation
- Support NX-5000 Remote Control Head Options
- Multi-RF Deck Configuration Available (Lowband, VHF, 380-470, 450-520, 7&800)
- Built-in Micro USB A-B Interface
- Horn Alert / Public Address
- Built-in GPS Receiver
- Built-in Bluetooth® Module
- Built-in 56-bit DES Encryption (4 keys programmable by KPG-D1N)
- Optional 256-bit AES Encryption
- 12 Watt Audio Output
- DB-25 & Molex 9-pin Accessory Connector
- Active Noise Reduction (ANR)
- KPG-D1N Windows® FPU
- Flash Firmware Upgrading
- MIL-STD-810 C/D/E/F/G
- IP54/55

ANALOG MODE

- Conventional Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF
- Built-in Voice Inversion Scrambler
- Noise Blanker

DIGITAL – NXDN® MODE

- NXDN® Conventional
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming (requires KPG-180AP OTAP Manager Software)
- Paging Call
- Emergency Call
- All Group Call
- Digital Two-Tone
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

OPTIONAL FEATURES & CONFIGURATIONS

GENERAL FEATURES

- 4000 Channel (KWD-5000CH)
- Front Panel Programming (KWD-5001FP)
- microSD/microSDHC Memory Card Slot (KWD-5002SD)
- Built-in Bluetooth® Module for Data (KWD-5003BT)
- Remote Control by Subscriber Units (KWD-5007RC)
- 256-bit AES Encryption (KWD-AE30K/31K Encryption Module required)

DIGITAL – NXDN MODE

- Conventional Features (Factory Installed)

Multi-Deck Compatible Models & Modes

Models	Bands	Power	Operable Modes
NX-5600H	Lowband VHF (39-50)	110 Watts	Analog/NXDN
NX-5700	VHF (136-174)	50 Watts	Analog/NXDN/DMR/P25
NX-5700H	VHF (136-174)	110 Watts	Analog/NXDN/P25
NX-5800H	UHF (380-470, 450-520)	100 Watts	Analog/NXDN/P25
NX-5800	UHF (380-470, 450-520)	50 Watts	Analog/NXDN/DMR/P25
NX-5900	7/800	35 Watts	Analog/NXDN/DMR/P25

MOUNTING & REMOTE CONFIGURATIONS

(See NX-5000 Accessory page for details)

- KCH-19 Basic Control Head
- KCH-20R Featured Control Head
- KCH-21R Handheld Control Head
- Single Remote Control Head (KRK Kit & KCT-71 or KCT-77 Cable required)
- Dual Remote Control Heads (KCH-19/20R/21R & KRK Kit & KCT-71 or KCT-77 Cables required)
- Multiple RF Decks (KRK Kit & KCT-71 or KCT-77 Control Cable)



RF Deck Only

MUST purchase necessary accessories separately

LIST

NX-5600HBF3	NX-5600HBF3 (110W, 39-50 MHz) RF Deck Only, Analog & NXDN Conv (Remote Control Head, Microphone, Bracket, DC Cable not included)	2319.20
-------------	--	---------



NX-5600H

Lowband Digital & FM Analog Mobile Radio

[Table of Contents](#)

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- [FPU & Software Applications](#): Software License Key Request Form
- [Radio Feature Licenses](#): Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

General Radio Features		LIST
KWD-5000CH	License Key for 4000 Channel Expansion	499.00
KWD-5001FP	License Key for Front Panel Programming	356.30
KWD-5002SD	License Key for microSD Memory Card Slot Activation	124.70
KWD-5003BT	License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-5003BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-5007RC	License Key for Remote Control by Subscriber Units Note: - P25 Mode is NOT available. - This license may be used by Administrator due to Stun/Revive/Kill. - The license is required for only Transmitting of Remote Control. - PC command for Remote Control does NOT require the license.	47.50

Other Accessories, Software, and Services

Refer to NX-5000 series mobile accessory pages

 NX-5000 Series Mobile Accessories Table of Contents	
MICROPHONES AND SPEAKERS	
	LIST
KMC-65M	MIL-SPEC Standard electret mobile microphone (8-pin mod. plug) 69.80
KMC-66M	MIL-SPEC Standard electret mobile microphone with 12 keypad (8-pin mod. plug) 126.70
KES-10W	External speaker, 8.5W rated, 4-Ohm, 3.5mm L-type pin plug 65.30
KES-5A	External speaker, 40W max input 80.30
	Note: Requires KCT-72M to connect to Remote Control Head
KCT-72M	External Accessory Connection Cable for KCH-19M / KCH-20RM 49.20
KMC-9C	Control Station Desktop Microphone (8-pin mod. plug) 115.30
	Note: NOT compatible with TDMA operations
KMC-59C	Control Station Desktop Microphone (8-pin mod. plug) 255.50
DC POWER CABLES	
	LIST
KCT-23M	DC Cable, 35-50W, 10 feet 52.50
	Note: For mid power mobiles (NX-5700/5700B/5800/5800B/5900/5900B) only.
KCT-23M3	DC Cable, 35-50W, 23 feet 72.20
	Note: For mid power mobiles (NX-5700/5700B/5800/5800B/5900/5900B) only.
KCT-23M2	DC Cable, 75-110W, 10 feet 52.50
	Note: For high power mobiles (NX-5600HB/5700HB) only.
KCT-23M4	DC Cable, 75/110W, 23 feet 72.20
	Note: For high power mobiles (NX-5600HB/5700HB) only.
MOUNTING BRACKETS	
	LIST
KMB-33M	Mounting Bracket 18.80
	Note: For mid power mobiles (NX-5700/5700B/5800/5800B/5900/5900B) only.
KMB-36	Mounting Bracket 100.80
	Note: For high power mobiles (NX-5600HB/5700HB) only.
CONTROL HEADS	
	LIST
KCH-19M	Basic Control Panel 240.50
KRK-14HM	Control Head Interface Kit for KCH-19M 212.30
	Full Featured Remote Control Panel
	Note:
	- Remote configuration only. No Internal Speaker included. KES-5A is required.
	- microSD License (KWD-5002SD) and Bluetooth SPP License (KWD-5003BT) are NOT required for both KCH-20RM and connected RF Decks . KCH-20RM and connected RF Decks can be used of microSD and Bluetooth SPP with NO License Activation.
KCH-20RM	802.70
	Hand Held Control Head for Long Cable *Requires KCT-77M2 (17 ft.)
	Note:
	- Bluetooth SPP License (KWD-5003BT) is NOT required for both KCH-21RM and connected RF Decks. KCH-21RM has built-in Bluetooth SPP license that will also activate the connected RF Decks.
KCH-21RM	1332.20
	Hand Held Control Head with Short Cable (4 ft.)
	Note:
	- Bluetooth SPP License (KWD-5003BT) is NOT required for both KCH-21RM and connected RF Decks. KCH-21RM has built-in Bluetooth SPP license that will also activate the connected RF Decks.
KCH-21RM-S	1332.20
CONTROL HEAD REMOTE KIT (for Mid Power Mobiles)	
	LIST
KRK-15BM	Control Head Remote Kit 67.00
	Note: For mid power mobiles (NX-5700/5700B/5800/5800B/5900/5900B) only.
REMOTE & MULTI RF DECK CABLES	
	LIST
KCT-71M2	Remote Control Cable (17 feet) 94.00
KCT-71M3	Remote Control Cable (25 feet) 107.00
KCT-71M4	Remote Control Cable (1.6 feet) 60.20
KCT-71A50	KCT-71A Extended Control Head Cable (up to 50 ft. max.) 249.50
	Note: Please specify exact length at 1ft. increments when ordering.
	Caution: Extended control head cables exhibit a loss in speaker audio power to the control heads.
KCT-71A100	KCT-71A Extended Control Head Cable (up to 100 ft. max.) 321.50
	Note: Please specify exact length at 1ft. increments when ordering.
	Caution: Extended control head cables exhibit a loss in speaker audio power to the control heads.
KCT-77M2	Remote Control Cable for KCH-21RM (17 feet) 245.20

NX-5000 Series Mobile Accessories

[Table of Contents](#)

OTHER ACCESSORIES

KCT-46	Ignition sense cable Note: For mid power mobiles (NX-5700/5700B/5800/5800B/5900/5900B) only.	18.30
KCT-18	Ignition sense cable Note: For high power mobiles (NX-5600HB/5700HB) only.	26.30
KAP-2	Horn Alert/P.A. Relay Option Note: For mid power mobiles (NX-5700/5700B/5800/5800B/5900/5900B) only.	84.30
KCT-72M	External Accessory Connection Cable for KCH-19M / KCH-20RM	49.20
KLF-2	Line Filter (suppresses alternator whine, 25dB, 25A max).	56.30
KMB-10	Key lock adapter Note: For mid power mobiles (NX-5700/5700B/5800/5800B/5900/5900B) only.	35.20
KRA-40GM	GPS Antenna	56.00
KCT-90USB	USB Mobile Cable for SD Card Direct Access Support Note: microSD function requires KWD-5002SD license.	124.70
KCT-91MRS	DB25 Cable for Mobile Relay Station (Conventional Only) Note: - Mobile Relay Station requires Multi RF Deck Configuration. - Built-in GPS and Bluetooth are not available with Mobile Relay Station. - DMR mode is not available	83.80
KPS-15	DC Switching Power Supply (117/230 VAC; 23A max. continuous, 25A peak)	232.00
KMB-34	Control Station Mounting Case for KPS-15 Power Supply with mobile Note: For mid power mobiles (NX-5700/5700B/5800/5800B/5900/5900B) only.	72.20

Sensear Bluetooth® Headsets Non-IS Models (SENS® Technology)

SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB	775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	775.00

Sensear Bluetooth® Headsets IS Rated Models (SENS® Technology)

SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB	940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB	1150.00

*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety:

IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4 -20°C to +40°C, T3C -20°C to +50°C

RADIO FEATURE LICENSE OPTIONS

Refer to model page for available Radio Feature Licenses.

Radio & Feature compatibility may differ per model.

NX-5000 Series Mobile Accessories

[Table of Contents](#)

ENCRIPTION MODULES		LIST
KWD-AE30K	AES FIPS140-2 Level 1 & DES Encryption Module (Multi-Key) Order a Labor Code L-5007 if installation is required. KWD-AE30K requires: a Motorola KVL3000 Plus/4000 key loader device. KWD-AE30K is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1). Note: Required for Link Layer Authentication	1137.30
KWD-AE31K	AES & DES Encryption Module (Multi-Key) Order a Labor Code L-5008 if installation is required. Note: Requires KPG-AE1/DE1 software key loader or Motorola KVL3000 Plus/4000 key loader device. KWD-AE31K is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Note: Required for Link Layer Authentication	737.20
KPG-AE1K	AES/DES Encryption Software Key Loader for KWD-AE31K Authentication by KPT-300LMC is required Note: KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A)	649.10
KPG-DE1K	DES Encryption Software Key Loader for KWD-AE31K Authentication by KPT-300LMC is required	436.50

-- IMPORTANT NOTES regarding ENCRIPTION MODULES--
Encryption modules, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. **DO NOT SHIP** encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

Kenwood may request the following information to be submitted at time of order (this information must meet Kenwood internal approvals prior to shipment even if being returned to Kenwood later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination
 (customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

c) Intended Use of Radios: Law enforcement, security, operations, etc.

KWD-AE30 AES FIPS140-2 SCM , NIST Validation & Customer Shipping

A secure delivery method direct to the end user customer is required by the NIST AES FIPS 140-2 validation rules. For U.S. Federal Government entities the SCM must ship from Kenwood USA Corporation directly to the end user customer by a trusted carrier (FEDEX, UPS or a designated Kenwood USA Corporation employee); shipping/handling by a dealer or other entity is not acceptable. This may or may not be required by local/state government agencies or business/industrial users. Please check with the end use customer about their AES encryption handling requirements before ordering. Kenwood will not be responsible for shipments of KWD-AE30K modules to erroneous destinations specified on an order.



NX-5000 Series Mobile Accessories

Table of Contents

REMOTE & MULTI-RF DECK CONFIGURATIONS

DIY - CONFIGURATION GUIDE

NX-5000 series mobile are capable of following configurations using any frequency/power type combinations

- Dash Mount **Mid power models only*
- Single Band / Single Control Head
- Single Band / Dual Control Head
- Dual Band / Single Control Head
- Dual Band / Dual Control Head
- Triple Band / Single Control Head
- Triple Band / Dual Control Head



This order guide is intended for DIY configuring and assembly of NX-5000 multi-deck configuration.

For Factory Assembly orders, refer to convenient Accessory Kit & Assembly Labor codes.

STEP 1. Select Mobile(s) / Up to 3 mobiles of any combination

- Mid Power Mobiles : NX-5700B, NX-5800B, NX-5900B
- High Power Mobiles : NX-5600HB, NX-5700HB, NX-5800HB

STEP 2. Add power cable and bracket / For each Mobile Deck

- Mid Power Mobiles : KCT-23M(10 ft) or KCT-23M3(23ft), KMB-33M(bracket), and KRK-15BM(Control Head Remote Kit)
- High Power Mobiles : KCT-23M2(10 ft) or KCT-23M4(23ft), and KMB-36(bracket)

STEP 3. Select Control Head(s). Up to two Control Heads.

- KCH-19M Basic Control Head + KRK-14HM Control Head Interface Kit
- KCH-20RM Full Featured Control Head + KCT-72M(Acc Connection Port) + KES-5A (Speaker)
- KCH-21RM Handheld Control Head

STEP 4. Add Microphone for each Control Head.

- KMC-65M Standard Microphone
- KMC-66M Microphone with 12 keypad
- or from other 8pin audio input accessories

STEP 5. Select Desired Cable Length (Radio to Control Head)

- For KCH-19M/KCH-20RM Control Heads:
17ft.(KCT-71M2, 25ft. (KCT-71M3), 1.6ft.(KCT-71M4), or custom length (KCT-71A50/KCT-71A100)
- For KCH-21RM Control Head:
17ft. (KCT-77M2)

STEP 6. Add Deck to Deck Connection Cable (ONLY for multi-RF configuration)

- For Dual-band configuration : Requires ONE x KCT-71M4 (1.6ft.)
- For Tri-band configuration : Requires TWO x KCT-71M4 (1.6ft)

 NX-5000 Series Mobile Accessories Table of Contents		
CONVENIENT REMOTE & MULTI-RF DECK ACCESSORY KITS		
MID POWER / Remote Kit - Single Head / Single RF Deck		LIST
5ABM	KMC-65M, KCH-19M, KRK-14HM, KRK-15BM, KCT-71M2, KCT-23M3, KMB-33M	774.60
5AFM	KMC-65M, KCH-20RM, KRK-15BM, KCT-71M2, KCT-23M3, KMB-33M, KES-5A, KCT-72M	1254.00
5AHM	KCH-21RM, KRK-15BM, KCT-77M2, KCT-23M3, KMB-33M	1735.40
MID POWER / Remote Kit - Dual Head / Single RF Deck		LIST
5ABBM	KMC-65M(x2), KCH-19M(x2), KRK-14HM(x2), KRK-15BM, KCT-71M2(x2), KCT-23M3, KMB-33M	1391.20
5AFFM	KMC-65M(x2), KCH-20RM(x2), KRK-15BM, KCT-71M2(x2), KCT-23M3, KMB-33M, KES-5A(x2), KCT-72M(x2)	2350.00
MID POWER / Remote Kit - Single Head / Dual RF Deck		LIST
5ABMM	KMC-65M, KCH-19M, KRK-14HM, KRK-15BM(x2), KCT-71M2, KCT-71M4, KCT-23M3(x2), KMB-33M(x2)	992.80
5AFMM	KMC-65M, KCH-20RM, KRK-15BM(x2), KCT-71M2, KCT-71M4, KCT-23M3(x2), KMB-33M(x2), KES-5A, KCT-72M	1472.20
5AHMM	KCH-21RM, KRK-15BM(x2), KCT-77M2, KCT-71M4, KCT-23M3(x2), KMB-33M(x2)	1953.60
MID POWER / Remote Kit - Single Head / Dual RF Deck, External Speakers per deck		LIST
5ABMM-MR	KMC-65M, KCH-19M, KRK-14HM, KRK-15BM(x2), KCT-71M2, KCT-71M4, KCT-23M3(x2), KMB-33M(x2), KES-5A(x2), KAP-2(x2)	1322.00
5AFMM-MR	KMC-65M, KCH-20RM, KRK-15BM(x2), KCT-71M2, KCT-71M4, KCT-23M3(x2), KMB-33M(x2), KES-5A(x2), KAP-2(x2)	1671.90
5AHMM-MR	KCH-21RM, KRK-15BM(x2), KCT-77M2, KCT-71M4, KCT-23M3(x2), KMB-33M(x2), KES-5A(x2), KAP-2(x2)	2282.80
MID POWER / Remote Kit - Dual Head / Dual RF Deck		LIST
5ABMM	KMC-65M(x2), KCH-19M(x2), KRK-14HM(x2), KRK-15BM(x2), KCT-71M2(x2), KCT-71M4, KCT-23M3(x2), KMB-33M(x2)	1609.40
5AFFMM	KMC-65M(x2), KCH-20RM(x2), KRK-15BM(x2), KCT-71M2(x2), KCT-71M4, KCT-23M3(x2), KMB-33M(x2), KES-5A(x2), KCT-72M(x2)	2568.20
MID POWER / Remote Kit - Dual Head / Dual RF Deck, External Speakers per deck		LIST
5ABMM-MR	KMC-65M(x2), KCH-19M(x2), KRK-14HM(x2), KRK-15BM(x2), KCT-71M2(x2), KCT-71M4, KCT-23M3(x2), KMB-33M(x2), KES-5A(x2), KAP-2(x2)	1938.60
5AFFMM-MR	KMC-65M(x2), KCH-20RM(x2), KRK-15BM(x2), KCT-71M2(x2), KCT-71M4, KCT-23M3(x2), KMB-33M(x2), KES-5A(x2), KAP-2(x2)	2638.40
HIGH POWER / Single Head Remote Mount Kit		LIST
6ABMIG	KMC-65M, KCH-19M, KRK-14HM, KCT-71M2, KCT-23M4, KCT-18, KMB-36	815.90
6AFMIG	KMC-65M, KCH-20RM, KCT-71M2, KCT-23M4, KCT-72M, KES-5A, KCT-18, KMB-36	1295.30
6AHMIG	KCH-21RM, KCT-77M2, KCT-23M4, KCT-18, KMB-36	1776.70
HIGH POWER / Single Remote Mount / Dual High Power RF Deck		LIST
6AFMMIG	KMC-65M, KCH-20RM, KCT-71M2, KCT-23M4(x2), KCT-72M, KES-5A, KCT-18(x2), KMB-36 (x2), KCT-71M4	1554.80
HIGH POWER / Single Deck Dual Head Remote Mount		LIST
6ABBMIG	KMC-65M(x2), KCH-19M(x2), KRK-14HM(x2), KCT-71M2(x2), KCT-23M4, KCT-18, KMB-36	1432.50
6AFFMIG	KMC-65M(x2), KCH-20RM(x2), KCT-71M2(x2), KCT-23M4, KCT-72M(x2), KES-5A(x2), KCT-18, KMB-36	2391.30



NX-5000 Series Mobile Accessories

Table of Contents

REMOTE & MULTI-RF DECK ASSEMBLY LABORS

LIST

Basic assembly and setup service for Remote & Multi-RF Deck configurations.

Note1: MUST submit the Remote Mount Configuration Request Form for multi-band system

Note2: When mixing two accessory kits to configure one multi-band system, you MUST add ONE KCT-71M4 cable to your order.

Ordering Example: Creating Tri-Deck (2 mid power + 1 high power deck)

2 x NX-5x00BK Any of mid power deck, any band

1 x NX-5x00HBF Any of high power deck, any band

1 x 5AFMM Accessory kit for two mid power decks

1 x KCT-71M4 Connector cable to bridge two accessory packages

1 x 6AFMIG Accessory kit for high power deck

1 x L-5037 Labor code for Triple Deck Radio assembly

As a result, radio is configured as... **two control heads, triple deck connected, with 2 mid power and 1 high power deck.**

Note3: MUST purchase NX-5x00(H)B RF Decks and corresponding Remote Kit(s) with all listed labors.

L-5029	Factory Assembly & Factory Packing for Single Head Remote Kit and Radio	81.00
L-5030	Factory Assembly & Factory Packing for Dual Head Remote Kit and Radio	151.20
L-5031	Factory Assembly & Factory Packing for Single Head Remote Kit and Dual Deck Radio	91.80
L-5032	Factory Assembly & Factory Packing for Single Head / Dual Deck / Ext. Speakers	162.00
L-5033	Factory Assembly & Factory Packing for Dual Head and Dual Deck Radio	162.00
L-5034	Factory Assembly & Factory Packing for Dual Head / Dual Deck / Ext. Speakers	167.30
L-5035	Factory Assembly & Factory Packing for Single Head Remote and Triple Deck Radio	151.20
L-5037	Factory Assembly & Factory Packing for Dual Head and Triple Deck Radio	172.80

INSTALLATION / TUNING SERVICES

LIST

L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-5006	NX-5000 Mobile Programming (with basic TX/RX check)	40.50
L-5007	Install KWD-AE30K in NX-5000 series Mobile (Must purchase module separately)	81.00
L-5008	Install KWD-AE31K in NX-5000 series Mobile (Must purchase module separately)	81.00
L-5015	Install KAP-2 (Default) HR1/ INTERNAL Sp./PA. Note: This labor code is only for individual orders for mobile configuration. The labor code (L-5032, 5034, and 5036) for Multi RF Deck Configuration Package includes installation of KAP-2.	27.00
L-5019	Install KAP-2 (Default) HR1/ EXTERNAL Sp./PA. Note: This labor code is only for individual orders for mobile configuration. The labor code (L-5032, 5034, and 5036) for Multi RF Deck Configuration Package includes installation of KAP-2.	27.00
L-5051	P25 CAP Compliance of Non-Encrypted Radio - Disable Built-in DES	54.00
L-5077	FSFS++ Forest Service Feature Set - Factory Installation Adds Tactical Zone improvements and Analog Conv & P25 Conv Zone Cloning Note: Must purchase <u>per Radio</u> • This feature set is provided by custom firmware based on V4.21.00 firmware. • Feature set is applicable for analog conventional / P25 conventional modes only. • Feature set does not support mobile multi-deck configuration. • Feature set will not work with any other firmware options or customized firmware. • Custom firmware is not eligible for warranty compensation.	64.80
L-1849	FSFS++ Forest Service Feature Set - Field Installation Adds Tactical Zone improvements and Analog Conv & P25 Conv Zone Cloning Note: Purchase per application - <u>provided as Custom FW for unlimited radios</u> <u>To PLACE AN ORDER</u> , submit "Kenwood LMR Customization Application" form along with your PO via email (lmr-customs@us.jvckenwood.com) • This feature set is provided as custom firmware based on V4.21.00 firmware. • Feature set is applicable for analog conventional / P25 conventional modes only. • Feature set does not support Mobile multi-deck configuration. • Feature set will not work with any other firmware options or customized firmware. • Custom firmware is not eligible for warranty compensation.	1512.00

NX-5000 Series Mobile Accessories

[Table of Contents](#)

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- [FPU & Software Applications](#): Software License Key Request Form
- [Radio Feature Licenses](#): Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

SERVICE RELATED ACCESSORIES		LIST
KPG-D1NK	License Key for KPG-D1NK Programming Software for NX-5000 Portable/Mobile (Windows® Vista/7/8/8.1) Note: Requires KPT-300LMC for authentication Note: Requires P25 Trunk system programming privileges for P25 Trunk programming. Must purchase L-5005 or KWD-ASK Hardware Access Keys	184.00
KWD-ASK-MK	Master Key for activating KWD-ASK-AK Access Keys - Restricted Purchase Requirements - Notes: • For NX-5000 series only. • Sold to trunked system operator (SYSOP) or SYSOP authorized entities only • Must have KPG-D1NK • SYSOP must provide 3-digit HEX HSID to Kenwood with P25 Trunking System Keys Request Form placed on Kenwood Tools. • Purchase KWD-ASK-AK Access Keys if needed.	668.50
KWD-ASK-AK	Access Key for KPG-D1NK P25 trunked programming Notes: Enables P25 Trunked system programming privileges in a KPG-D1NK. • For NX-5000 series only • Must be activated by trunked system operator (SYSOP) with KWD-ASK-MK Master Key • Must have KPG-D1NK • Configurable expiration period of KWD-ASK-AK set by KWD-ASK-MK is available for 3 years for built in battery. <u>USB Key must be replaced since the expiration set up dose not work after 3 years.</u>	280.00
KPG-115	Encryption Key Loader Interface Cable for Motorola KVL-3000/3000 Plus/4000	374.20
KPG-115AUT	KVL-4000 Radio Authentication Cable Note: Only capable for P25 Radio Authentication. Not available for Encryption Key Loading.	469.50
KPG-46XM	Full Speed USB Programming interface cable Note: This cable with USB mode may be used for SD Card Direct Access.	212.30
KPG-CLN-RJ45	Mobile-to-Mobile Cloning Cable (RJ45:RJ45), 3m	229.50

FleetSync® & NEXEDGE® AVL & MESSAGING

		LIST
KAS-10	FleetSync & NEXEDGE AVL & Messaging Software with NEXEDGE Trunking VoIP Dispatch Note: - Users can chose to operate Messaging, AVL or VoIP or all three if desired. Compatible with Windows® XP, VISTA & 7 and Microsoft® MapPoint® 2006/2009/2010 (certain format bitmap images can be imported). Refer to KAS-10 product spec sheets and manuals for details. - NEXEDGE Gen2. Tvoe-D Trunkina and DMR Svstem not supported.	515.50



NX-3720HG/3820HG

VHF/UHF Digital & FM Analog Mobile Radios

Table of Contents



All NX-3000 Series Mobiles include:

- Standard Microphone (KMC-65M)
- Mounting Bracket
- DC Cable
- Blade Fuse
- User Guide
- Premium Warranty: 3 Years

All Accessories / options: 1 Year

Because of spurious signal (birdie), the following frequencies (and ± 7.5 kHz ranges) are not allowed:

- | | | |
|------------|------------|------------|
| • 139.2000 | • 403.2000 | • 460.8000 |
| • 144.0000 | • 408.0000 | • 465.6000 |
| • 148.8000 | • 412.8000 | • 470.4000 |
| • 153.6000 | • 417.6000 | • 475.2000 |
| • 158.4000 | • 422.4000 | • 480.0000 |
| • 163.2000 | • 427.2000 | • 484.8000 |
| • 166.4000 | • 432.0000 | • 489.6000 |
| • 168.0000 | • 436.8000 | • 494.4000 |
| • 172.8000 | • 441.6000 | • 499.2000 |
| | • 446.4000 | • 504.0000 |
| | • 451.2000 | • 508.8000 |
| | • 456.0000 | • 513.6000 |
| | | • 518.4000 |

1. Designed to operate digital, DMR OR NXDN, along with analog FM; a single digital protocol selected with programming software.

STANDARD

GENERAL FEATURES

- 50 W (136-174 MHz) Models
- 45 W (400-470, 450-520 MHz) Models
- 512 CH / 128 Zones
- 4-Line Basic Frame (2-Line Main/Sub-LCD, icon & key guide) / 14 characters
- 4-Line Text Message Frame (2 Lines of Text, icon & key guide)
- Function/Status LCD Icons
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- 7-color LED Indicator
- Transmit/Busy/Call Alert/Warn LED
- Emergency/AUX Key
- 4W Speaker Audio
- DB-15 Accessory Connector
- Dual Digital Protocol ¹
- Emergency Call Features
- Built-in GPS Receiver
- Built-in Bluetooth® Module
- Active Noise Reduction (ANR)
- KPG-D3N Windows® FPU
- Flash Firmware Upgrading
- Optional Software-based DES and AES Encryptions (Digital Only)
- MIL-STD-810 C/D/E/F/G
- IP-54 Water & Dust Intrusion
- Digital Encode/Decode Format

ANALOG MODE

- Conventional Zones
- LTR® Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF
- Built-in Voice Inversion Scrambler

DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking Option
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming (requires KPG-180AP OTAP Manager Software)
- Paging Call
- Emergency Call
- All Group Call
- Digital Two-Tone
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

DIGITAL – DMR MODE

- DMR Tier 2 Conventional
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Site Roaming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Option

OPTIONAL FEATURES

- 1000 Channel (**KWD-3000CH**)
- Front Panel Programming (**KWD-3001FP**)
- Built-in Bluetooth® Module for Data (**KWD-3002BT**)
- Digital NXDN Trunking and Trunking 2.5 (**KWD-3501TR**)
- DMR Tier 2 Conventional (**Factory Installed**)
- DMR Tier 3 Trunking and Trunking 2.5 (**KWD-3302TR**)
- DMR ARC4 Enhanced Encryption (**KWD-3502EE**)
- AES/DES Encryption (**KWD-3503AE**)
- Remote Control by Subscriber Units (**KWD-3504RC**)

RADIO			LIST
NX-3720HGK	VHF (136-174MHz), 50 Watts, 512 CH, 128 Zones		901.80
NX-3820HGK	UHF (450 - 520MHz), 45 Watts, 512 CH, 128 Zones		901.80
NX-3820HGK2	UHF (400 - 470MHz), 45 Watts, 512 CH, 128 Zones		901.80
RADIO TRUNKING PACKAGE			LIST
NX-3720HGK-TR	VHF (136-174MHz), 50 Watts, 512 CH, 128 Zones with NXDN Trunking		934.70
NX-3820HGK-TR	UHF (450 - 520MHz), 45 Watts, 512 CH, 128 Zones with NXDN Trunking		934.70
NX-3820HGK2-TR	UHF (400 - 470MHz), 45 Watts, 512 CH, 128 Zones with NXDN Trunking		934.70



NX-3720HG/3820HG

VHF/UHF Digital & FM Analog Mobile Radios

Table of Contents

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- **FPU & Software Applications:** Software License Key Request Form
- **Radio Feature Licenses:** Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features	LIST
KWD-3000CH License Key for 1000 Channel Expansion	190.20
KWD-3001FP License Key for Front Panel Programming	148.50
KWD-3002BT License Key for Bluetooth Data (Required for Data Communication) Note: Voice Communication for Bluetooth Head Set does NOT require KWD-3002BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-3302TR License Key for DMR Tier 3 Trunking	118.80
KWD-3501TR License Key for Digital Trunking (Includes NXDN Type-C and Type-C Gen2, and Trunking 2.5)	49.50
KWD-3502EE License Key for DMR ARC4 Enhanced Encryption	47.50
KWD-3503AE License Key for AES/DES Encryption Note: 1. Factory Installation only. Must order L-5054. 2. Requires KPG-AE1/DE1 software key loader to encrypt. 3. KWD-3503AE is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Please see descriptions at the bottom.	534.70
KWD-3504RC License Key for Remote Control by Subscriber Units Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is required for only Transmitting of Remote Control. - PC command for Remote Control does NOT require the license.	47.50
KWD-3505DE License Key for DES Encryption Note: Requires KPG-AE1/DE1 software key loader to load encryption keys	118.80

CONTROL HEAD REMOTE KIT	LIST
KRK-18HM Interface Kit for a Control Head	194.70
KRK-19BM Interface Kit for an RF Deck	49.20

Note: Remote Control Cable must be purchased separately.

REMOTE CONTROL CABLES	LIST
KCT-71M2 Remote Control Cable (17 feet)	94.00
KCT-71M3 Remote Control Cable (25 feet)	107.00
KCT-71M4 Remote Control Cable (1.6 feet)	60.20
KCT-71A50 KCT-71A Extended Control Head Cable (up to 50 ft. max.) Note: Please specify exact length at 1ft. increments when ordering. Caution: Extended control head cables exhibit a loss in speaker audio power to the control heads.	249.50
KCT-71A100 KCT-71A Extended Control Head Cable (up to 100 ft. max.) Note: Please specify exact length at 1ft. increments when ordering. Caution: Extended control head cables exhibit a loss in speaker audio power to the control heads.	321.50

MOBILE INSTALLATION ACCESSORIES	LIST
KCT-60M DB15-to-15pin Molex Adapter Cable	38.70
KCT-18 Ignition sense cable (requires KCT-60M Acc. Cable Option)	26.30
KCT-72M External Accessory Connection Cable for KRK-18HM	49.20
KLF-2 Line Filter (suppresses alternator whine, 25dB, 25A max).	56.30
KMB-10 Key lock adapter	35.20
KRA-40GM GPS Antenna	56.00



NX-3720HG/3820HG

VHF/UHF Digital & FM Analog Mobile Radios

Table of Contents

CONTROL STATION INSTALLATION ACCESSORIES LIST

KMB-34	Control Station Mounting Case for KPS-15 Power Supply and Mobiles (excludes TK-5x10/6110 series). (mobile mounting hardware included)	72.20
KPS-15	DC Switching Power Supply (117/230 VAC; 23A max. continuous, 25A peak)	232.00

MICROPHONES, SPEAKERS AND AUDIO ACCESSORIES LIST

KMC-65M	MIL-SPEC Standard electret mobile microphone (8-pin mod. plug)	69.80
KMC-66M	MIL-SPEC Standard electret mobile microphone with 12 keypad (8-pin mod. plug)	126.70
KMC-9C	Control Station Desktop Microphone (8-pin mod. plug) Note: NOT compatible with TDMA operations	115.30
KMC-59C	Control Station Desktop Microphone (8-pin mod. plug) Note: Compatible with FDMA (analog / NXDN) and TDMA (DMR) Operation.	255.50
KES-10W	External speaker, 8.5W rated, 4-Ohm, 3.5mm L-type pin plug	65.30
KES-5A	External speaker, 40W max input Note: requires KCT-60M installed.	80.30

Sensear Bluetooth® Headsets Non-IS Models (SENS® Technology)

SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB	775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	775.00

Sensear Bluetooth® Headsets IS Rated Models (SENS® Technology)

SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB	940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB	1150.00

*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety:

IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4 - 20°C to +40°C, T3C -20°C to +50°C

SERVICE RELATED ACCESSORIES LIST

KPG-D3NK	License Key for KPG-D3NK Programming Software for NX-3000 Portable/Mobile Note: Requires KPT-300LMC for authentication	184.00
KPG-AE1K	License Key for AES/DES Encryption Software Key Loader for KWD-3503AE Note: - Requires KPT-300LMC for authentication - KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A).	649.10
KPG-DE1K	License Key for DES Encryption Software Key Loader for KWD-3505DE Note: - Requires KPT-300LMC for authentication	436.50
KPG-46XM	Full Speed USB Programming interface cable Note: This cable with USB mode may be used for SD Card Direct Access.	212.30

INSTALLATION / TUNING CHARGES LIST

L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-5053	NX-3720HG/3820HG/3920G/3921G Programming (with basic TX/RX check)	40.50
L-5054	Installation for NX-3000 Portable/Mobile AES	27.00

-- IMPORTANT NOTES regarding ENCRYPTION SOFTWARE OPTION--



NX-3720HG/3820HG

VHF/UHF Digital & FM Analog Mobile Radios

[Table of Contents](#)

Encryption Software Option, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

JVCKENWOOD may request the following information to be submitted at time of order (this information must meet JVCKENWOOD internal approvals prior to shipment even if being returned to JVCKENWOOD later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination
(customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

c) Intended Use of Radios: Law enforcement, security, operations, etc.



NX-3920G/3921G

800/900MHz Digital & FM Analog Mobile Radios

Table of Contents



All NX-3000 Series Mobiles include:

- Standard Microphone (KMC-65M)
- Mounting Bracket
- DC Cable
- Blade Fuse
- User Guide
- Premium Warranty: 3 Years

All Accessories / options: 1 Year

Because of spurious signal (birdie), the following frequencies (and $\pm 6.25\text{kHz}$ ranges) are not allowed:

- 854.4000 • 936.0000
- 859.2000 • 940.8000
- 864.0000
- 868.8000

1. Designed to operate digital, DMR OR NXDN, along with analog FM; a single digital protocol selected with programming software.

STANDARD

GENERAL FEATURES

- 15 W (800 MHz) Model
- 15 W (900 MHz) Model
- 512 CH / 128 Zones
- 4-Line Basic Frame (2-Line Main/Sub-LCD, icon & key guide) / 14 characters
- 4-Line Text Message Frame (2 Lines of Text, icon & key guide)
- Function/Status LCD Icons
- Multi-Language Display
- Date & 12/24 Hour Time Clock
- 7-color LED Indicator
- Transmit/Busy/Call Alert/Warn LED
- Emergency/AUX Key
- 4W Speaker Audio
- DB-15 Accessory Connector
- Dual Digital Protocol ¹
- Emergency Call Features
- Built-in GPS Receiver
- Built-in Bluetooth® Module
- Active Noise Reduction (ANR)
- KPG-D3N Windows® FPU
- Flash Firmware Upgrading
- Optional Software-based DES and AES Encryptions (Digital Only)
- MIL-STD-810 C/D/E/F/G
- IP-54 Water & Dust Intrusion
- Digital Encode/Decode Format

ANALOG MODE

- Conventional Zones
- LTR® Zones
- FleetSync®/II: PTT ID ANI, Caller ID Display, Selective/Group Call, Emergency Status, Text Messages
- MDC-1200: PTT ID ANI, Caller ID Display, Emergency, Radio Check & Inhibit
- QT / DQT
- Two-Tone (Conventional Zones Only)
- DTMF
- Built-in Voice Inversion Scrambler

DIGITAL – NXDN® MODE

- NXDN® Conventional
- NXDN® TYPE-C (Gen1/Gen2) Trunking
- AMBE+2™ VOCODER
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming (requires KPG-180AP OTAP Manager Software)
- Paging Call
- Emergency Call
- All Group Call
- Status Messaging
- Remote Stun/Kill/Check
- Short & Long Data Messages
- GPS Location
- NXDN® Scrambler

DIGITAL – DMR MODE

- DMR Tier 2 Conventional Option
- DMR Tier 3 Trunking Option
- DMR Auto Slot Select (DASS)
- AMBE+2™ VOCODER
- 12.5 kHz Channels
- Over-the-Air Alias
- Over-the-Air Programming
- Site Roaming
- Call Interrupt (Direct & Repeater Mode)
- Paging Call
- Emergency Call
- All Group Call
- Late Entry
- Status Messaging
- Remote Control by Subscriber Units
- ARC4 Encryption Option

OPTIONAL FEATURES

- 1000 Channel (**KWD-3000CH**)
- Front Panel Programming (**KWD-3001FP**)
- Built-in Bluetooth® Module for Data (**KWD-3002BT**)
- Digital NXDN Trunking (**Factory Installed**)
- DMR Tier 2 Conventional (**KWD-3301CV**)
- DMR Tier 3 Trunking (**KWD-3301CV & KWD-3302TR**)
- DMR ARC4 Enhanced Encryption (**KWD-3502EE**)
- AES/DES Encryption (**KWD-3503AE**)
- Remote Control by Subscriber Units (**KWD-3504RC**)

RADIO			LIST
NX-3920GK	800MHz, 15 Watts, 512 CH, 128 Zones, NXDN Conv & Trunking		1177.80
NX-3921GK	900MHz, 15 Watts, 512 CH, 128 Zones, NXDN Conv & Trunking		1177.80

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- **FPU & Software Applications:** Software License Key Request Form
- **Radio Feature Licenses:** Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

	NX-3920G/3921G 800/900MHz Digital & FM Analog Mobile Radios	Table of Contents
---	---	--

Radio Features	LIST
KWD-3000CH License Key for 1000 Channel Expansion	190.20
KWD-3001FP License Key for Front Panel Programming	148.50
KWD-3002BT License Key for Bluetooth Data (Required for Data Communication) <u>Note:</u> Voice Communication for Bluetooth Head Set does NOT require KWD-3002BT. You can pair with any Bluetooth audio device without this option.	41.70
KWD-3301CV License Key for DMR Tier 2 Conventional	49.50
KWD-3302TR License Key for DMR Tier 3 Trunking (Requires KWD-3301CV)	118.80
KWD-3502EE License Key for DMR ARC4 Enhanced Encryption	47.50
KWD-3503AE License Key for AES/DES Encryption <u>Note:</u> 1. Factory Installation only. Must order L-5054. 2. Requires KPG-AE1/DE1 software key loader to encrypt. 3. KWD-3503AE is an U.S. DOC/BIS Export Controlled Item (ECCN 5A002A.1) Please see descriptions at the bottom.	534.70
KWD-3504RC License Key for Remote Control by Subscriber Units <u>Note:</u> - This license may be used by Administrator due to Stun/Revive/Kill. - The license is required for only Transmitting of Remote Control. - PC command for Remote Control does NOT require the license.	47.50
KWD-3505DE License Key for DES Encryption <u>Note:</u> Requires KPG-AE1/DE1 software key loader to load encryption keys	118.80
CONTROL HEAD REMOTE KIT	LIST
KRK-18HM Interface Kit for a Control Head	194.70
KRK-19BM Interface Kit for an RF Deck	49.20
<u>Note:</u> Remote Control Cable must be purchased separately.	
REMOTE CONTROL CABLES	LIST
KCT-71M2 Remote Control Cable (17 feet)	94.00
KCT-71M3 Remote Control Cable (25 feet)	107.00
KCT-71M4 Remote Control Cable (1.6 feet)	60.20
KCT-71A50 KCT-71A Extended Control Head Cable (up to 50 ft. max.) <u>Note:</u> Please specify exact length at 1ft. increments when ordering. <u>Caution:</u> Extended control head cables exhibit a loss in speaker audio power to the control heads.	249.50
KCT-71A100 KCT-71A Extended Control Head Cable (up to 100 ft. max.) <u>Note:</u> Please specify exact length at 1ft. increments when ordering. <u>Caution:</u> Extended control head cables exhibit a loss in speaker audio power to the control heads.	321.50
MOBILE INSTALLATION ACCESSORIES	LIST
KCT-60M DB15-to-15pin Molex Adapter Cable	38.70
KCT-18 Ignition sense cable (requires KCT-60M Acc. Cable Option)	26.30
KCT-72M External Accessory Connection Cable for KRK-18HM	49.20
KLF-2 Line Filter (suppresses alternator whine, 25dB, 25A max).	56.30
KMB-10 Key lock adapter	35.20
KRA-40GM GPS Antenna	56.00
CONTROL STATION INSTALLATION ACCESSORIES	LIST
KMB-34 Control Station Mounting Case for KPS-15 Power Supply and Mobiles (excludes TK-5x10/6110 series). (mobile mounting hardware included)	72.20
KPS-15 DC Switching Power Supply (117/230 VAC; 23A max. continuous, 25A peak)	232.00

	NX-3920G/3921G 800/900MHz Digital & FM Analog Mobile Radios	Table of Contents
---	---	--

MICROPHONES, SPEAKERS AND AUDIO ACCESSORIES		LIST
KMC-65M	MIL-SPEC Standard electret mobile microphone (8-pin mod. plug)	69.80
KMC-66M	MIL-SPEC Standard electret mobile microphone with 12 keypad (8-pin mod. plug)	126.70
KMC-9C	Control Station Desktop Microphone (8-pin mod. plug) Note: <u>NOT compatible with TDMA operations</u>	115.30
KMC-59C	Control Station Desktop Microphone (8-pin mod. plug) Note: <u>Compatible with FDMA (analog / NXDN) and TDMA (DMR) Operation.</u>	255.50
KES-10W	External speaker, 8.5W rated, 4-Ohm, 3.5mm L-type pin plug	65.30
KES-5A	External speaker, 40W max input Note: requires KCT-60M installed.	80.30

Sensear Bluetooth® Headsets Non-IS Models (SENS® Technology)		
SM1PB003	Sensear Non-IS BT Headband Single hearing protection IP54 with NRR of 27dB	775.00
SM1PE003	Sensear Non-IS BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	775.00
SM1PH003	Sensear Non-IS BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	775.00

Sensear Bluetooth® Headsets IS Rated Models (SENS® Technology)		
SM1PBIS02*	Sensear IS Rated BT Headband Single hearing protection IP54 with NRR of 27dB	940.00
SM1PEIS02*	Sensear IS Rated BT Behind-the-Neck Single hearing protection IP54 with NRR of 24dB	940.00
SM1PHIS02*	Sensear IS Rated BT Helmet Mount Single hearing protection IP54 with NRR of 23dB	940.00
SM1PBISDP02*	Sensear IS Rated BT Headband Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PEISDP02*	Sensear IS Rated BT Behind-the-Neck Dual hearing protection IP54 with NRR of 36dB	1150.00
SM1PHISDP02*	Sensear IS Rated BT Helmet Mount Dual hearing protection IP54 with NRR of 36dB	1150.00

*SM1P-IS & SM1P-ISDP Series Headsets Intrinsic Safety:

IS certification: TIA-4950-A, CSA C22.2 No. 157.92, & UL 913 5th Edition with a hazardous location rating of Class I, II, III, Division 1 & 2, Groups A - G, T4 -20°C to +40°C, T3C -20°C to +50°C

SERVICE RELATED ACCESSORIES		LIST
KPG-D3NK	License Key for KPG-D3NK Programming Software for NX-3000 Portable/Mobile Note: <u>Requires KPT-300LMC for authentication</u>	184.00
KPG-AE1K	License Key for AES/DES Encryption Software Key Loader for KWD-3503AE Note: - Requires KPT-300LMC for authentication - KPG-AE1 is a U.S. DOC/BIS Export Controlled Item (ECCN 5D002A).	649.10
KPG-DE1K	License Key for DES Encryption Software Key Loader for KWD-3505DE Note: - Requires KPT-300LMC for authentication	436.50
KPG-46XM	Full Speed USB Programming interface cable Note: This cable with USB mode may be used for SD Card Direct Access.	212.30

INSTALLATION / TUNING CHARGES		LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. <u>KPT-300LMC's History Menu will not display the Radio Features activated by Factory.</u>	129.70
L-5053	NX-3720HG/3820HG/3920G/3921G Programming (with basic TX/RX check)	40.50
L-5054	Installation for NX-3000 Portable/Mobile AES	27.00

-- IMPORTANT NOTES regarding ENCRYPTION SOFTWARE OPTION--



NX-3920G/3921G

800/900MHz Digital & FM Analog Mobile Radios

[Table of Contents](#)

Encryption Software Option, key loaders and radios containing encryption are export controlled by the U.S. Department of Commerce Bureau of Industry & Security EAR regulations and may either require an Export License, are eligible for a License Exception (ENC) or are exportable with No License Required (NLR) depending on the country, the consignee and the intended use. High level encryption is a special commodity that may require an export license to most countries. See www.bis.gov for more information regarding export regulations. DO NOT SHIP encryption items outside the U.S. without proper DOC/BIS Export Licenses and/or compliances.

JVCKENWOOD may request the following information to be submitted at time of order (this information must meet JVCKENWOOD internal approvals prior to shipment even if being returned to JVCKENWOOD later:

a) Initial Destination: Initial delivery point if different from Ultimate Destination
(customer distribution center, headquarters, dealership, manufacturer's representative)

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

b) Ultimate Destination: Final delivery point(s); deployment/distribution

* Business/Agency Name:

* Address:

* Contact Person Name:

* Contact Phone:

c) Intended Use of Radios: Law enforcement, security, operations, etc.

NEXEDGE®

NX-1700HNV/1800HNU

Table of Contents

VHF/UHF NXDN & FM Analog Mobile Radios



All NX-1000 series mobiles include:

- Standard Microphone (KMC-65M)
- Mounting Bracket
- DC Cable
- 15A Fuse
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

■ GENERAL FEATURES

- 50 W (136-174 MHz) Model
- 45 W (400-470 MHz) Model
- NXDN & Analog Mode
- Optional DMR Mode Conversion
- AMBE+2™ VOCODER
- 260 CH-GID / 128 Zones
- 13-Segment 10-character LCD Display
- 7-color large LED indicator
- White Backlit
- KENWOOD Audio Quality
 - 6W (max) loud audio
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
- Microphone type settings
- Multiple Scan Functions
 - Dual/Single Priority Scan, Single/Multi Zone Scan, Normal Scan
- Orange-colored Emergency button
- Horn Alert and Public Address function
- Ignition Sense function
- Voice Announcement
- DB15 Accessory Interface
- Lone Worker
- Max/Min Volume Setting
- Display Customization
- Power-on LED
- Menu Mode
- MIL-STD-810 C/D/E/F/G/H
- IP-54 Water & Dust Intrusion

■ DIGITAL – NXDN® MODE

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check & Control
- GPS Combination with additional module
- Late Entry
- NXDN® Scrambler

■ DIGITAL – DMR MODE (Optional)

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check & Control
- Over-the-Air Alias
- GPS Combination with additional module
- Late Entry
- ARC4 Encryption Option

■ ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Mute hold, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Unihit, Radio Check, Emergency
- QT / DQT
- Two-Tone
- DTMF
- Built-in Voice Inversion Scrambler (per channel)
- Built-in Compander (per channel)

OPTIONAL FEATURES

- NXDN Type-D Trunking License (**KWD-1202TDK**)
- DMR Conversion License (**KWD-1301CN**)
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**) *Only applicable after DMR conversion
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license. Please download latest firmware from MyTools website > Product > Firmware

MODEL		LIST
NX-1700HNVK	136-174 MHz VHF 50W, 260 Ch / 128 Zones	577.50
NX-1800HNUK2	400-470 MHz UHF 45W, 260 Ch / 128 Zones	577.50
MOBILE INSTALLATION ACCESSORIES		LIST
KCT-60M	DB15-to-15pin Molex Adapter Cable	38.70
KCT-18	Ignition sense cable (requires KCT-60M Acc. Cable Option)	26.30
KLF-2	Line Filter (suppresses alternator whine, 25dB, 25A max).	56.30
KMB-10	Key lock adapter	35.20
CONTROL STATION INSTALLATION ACCESSORIES		LIST
KMC-9C	Control Station Desktop Microphone (8-pin mod. plug) Note: NOT compatible with TDMA operations	115.30
KMC-59C	Control Station Desktop Microphone (8-pin mod. plug) Note: Compatible with FDMA (analog / NXDN) and TDMA operations	255.50
KMB-34	Control Station Mounting Case for KPS-15 Power Supply and Mobiles (excludes TK-5x10/6110 series). (mobile mounting hardware included)	72.20
KPS-15	DC Switching Power Supply (117/230 VAC; 23A max. continuous, 25A peak)	232.00
MICROPHONES AND SPEAKERS		LIST
KMC-65M	MIL-SPEC Standard electret mobile microphone (8-pin mod. plug)	69.80
KMC-66M	MIL-SPEC Standard electret mobile microphone with 12 keypad (8-pin mod. plug)	126.70
KES-10W	External speaker, 8.5W rated, 4-Ohm, 3.5mm L-type pin plug	65.30
KES-5A	External speaker, 40W max input Note: requires KCT-60M installed.	80.30

NEXEDGE®	NX-1700HNV/1800HNU VHF/UHF NXDN & FM Analog Mobile Radios	Table of Contents
----------	---	-------------------

FleetSync® & NEXEDGE® AVL & MESSAGING	LIST
---------------------------------------	------

GPS15XL-W	Garmin Internal GPS Receiver Board for NEXEDGE/FleetSync AVL Note: • Conventional operation only. • Requires GA25 MCX GPS antenna. • Refer to www.garmin.com for GPS-15XL-W technical specifications. • Option: Order L-1874 for Kenwood Long Beach installation.	175.20
GA25MCX	Garmin On-dash Style Magnetic base GPS Antenna for GPS15XL-W Note: shipped loose only; Install GA25MCX antenna to GPS15XL-W before vehicle install.	83.20

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features	LIST
----------------	------

KWD-1202TDK	License Key for NXDN Type-D Trunking	12.00
KWD-1301CN	License Key for DMR Conventional Conversion	49.50
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption Note: ARC4 Enhanced Encryption is available only in DMR mode.	39.70
KWD-1501RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	39.70

SERVICE RELATED ACCESSORIES	LIST
-----------------------------	------

KPG-46XM	USB Programming interface cable	212.30
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile Note: Requires KPT-300LMC for authentication	122.80

INSTALLATION / TUNING CHARGES	LIST
-------------------------------	------

L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-1873	NX-1000 Series Mobiles Programming (with basic TX/RX check) Must submit NX-x000 Series Programming Order Form upon placing order for any programming services	40.50
L-1874	Install Garmin GPS15XL-W in NX-1000 Series mobile Note: The KGS-3 & GPS15XL-W are not compatible with KGP-2A/2B AVL systems.	108.00

NEXEDGE®

NX-1700HDV/1800HDU

VHF/UHF DMR & FM Analog Mobile Radios

Table of Contents



All NX-1000 series mobiles include:

- Standard Microphone (KMC-65M)
- Mounting Bracket
- DC Cable
- 15A Fuse
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

■ GENERAL FEATURES

- 50 W (136-174 MHz) Model
- 45 W (400-470 MHz) Model
- DMR & Analog Mode
- Optional NXDN Mode Conversion
- AMBE+2™ VOCODER
- 260 CH-GID / 128 Zones
- 13-Segment 10-character LCD Display
- 7-color large LED indicator
- White Backlit
- KENWOOD Audio Quality
 - 6W (max) loud audio
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
 - Microphone type settings
- Multiple Scan Functions
 - Dual/Single Priority Scan, Single/Multi Zone Scan, Normal Scan
- Orange-colored Emergency button
- Horn Alert and Public Address function
- Ignition Sense function
- Voice Announcement
- DB15 Accessory Interface
- Lone Worker
- Max/Min Volume Setting
- Display Customization
- Power-on LED
- Menu Mode
- MIL-STD-810 C/D/E/F/G/H
- IP-54 Water & Dust Intrusion

■ DIGITAL – DMR MODE

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check & Control
- Over-the-Air Alias
- GPS Combination with additional module
- Late Entry
- ARC4 Encryption Option

■ DIGITAL – NXDN® MODE (Optional)

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check & Control
- GPS Combination with additional module
- Late Entry
- NXDN® Scrambler

■ ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Mute hold, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Unihit, Radio Check, Emergency
- QT / DQT
- Two-Tone
- DTMF
- Built-in Voice Inversion Scrambler (per channel)
- Built-in Compander (per channel)

OPTIONAL FEATURES

- NXDN Conversion License (**KWD-1201CD**)
- NXDN Type-D Trunking License (**KWD-1202TDK**) *Requires KWD-1201CD enabled
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**)
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license.
Please download latest firmware from MyTools website > Product > Firmware

MODEL		LIST
NX-1700HDVK	136-174 MHz VHF 50W, 260 Ch / 128 Zones	577.50
NX-1800HDK2	400-470 MHz UHF 45W, 260 Ch / 128 Zones	577.50
MOBILE INSTALLATION ACCESSORIES		LIST
KCT-60M	DB15-to-15pin Molex Adapter Cable	38.70
KCT-18	Ignition sense cable (requires KCT-60M Acc. Cable Option)	26.30
KLF-2	Line Filter (suppresses alternator whine, 25dB, 25A max).	56.30
KMB-10	Key lock adapter	35.20
CONTROL STATION INSTALLATION ACCESSORIES		LIST
KMC-9C	Control Station Desktop Microphone (8-pin mod. plug) Note: NOT compatible with TDMA operations	115.30
KMC-59C	Control Station Desktop Microphone (8-pin mod. plug) Note: Compatible with FDMA (analog / NXDN) and TDMA operations	255.50
KMB-34	Control Station Mounting Case for KPS-15 Power Supply and Mobiles (excludes TK-5x10/6110 series). (mobile mounting hardware included)	72.20
KPS-15	DC Switching Power Supply (117/230 VAC; 23A max. continuous, 25A peak)	232.00
MICROPHONES AND SPEAKERS		LIST
KMC-65M	MIL-SPEC Standard electret mobile microphone (8-pin mod. plug)	69.80
KMC-66M	MIL-SPEC Standard electret mobile microphone with 12 keypad (8-pin mod. plug)	126.70
KES-10W	External speaker, 8.5W rated, 4-Ohm, 3.5mm L-type pin plug	65.30
KES-5A	External speaker, 40W max input Note: requires KCT-60M installed.	80.30

NEXEDGE®	NX-1700HDV/1800H DU	Table of Contents
VHF/UHF DMR & FM Analog Mobile Radios		

FleetSync® & NEXEDGE® AVL & MESSAGING		LIST
GPS15XL-W	Garmin Internal GPS Receiver Board for DMR/FleetSync AVL Note: • Conventional operation only. • Requires GA25 MCX GPS antenna. • Refer to www.garmin.com for GPS-15XL-W technical specifications. • Option: Order L-1874 for Kenwood Long Beach installation.	175.20
GA25MCX	Garmin On-dash Style Magnetic base GPS Antenna for GPS15XL-W Note: shipped loose only; Install GA25MCX antenna to GPS15XL-W before vehicle install.	83.20

SOFTWARE LICENSING & RADIO FEATURE OPTIONS

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- **FPU & Software Applications:** Software License Key Request Form

- **Radio Feature Licenses:** Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features	LIST
KWD-1201CD	License Key for NXDN Conventional Conversion 49.50
KWD-1202TDK	License Key for NXDN Type-D Trunking Note: Requires KWD-1201CD (NXDN Conventional) enabled before applying NXDN Type-D Trunking license. 12.00
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption Note: ARC4 Enhanced Encryption is available only in DMR mode. 39.70
KWD-1501RC	License Key for Remote Control by Subscriber Unit Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license. 39.70

SERVICE RELATED ACCESSORIES

	LIST
KPG-46XM	USB Programming interface cable 212.30
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile Note: Requires KPT-300LMC for authentication 122.80

INSTALLATION / TUNING CHARGES

	LIST
L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory. 129.70
L-1873	NX-1000 Series Mobiles Programming (with basic TX/RX check) Must submit NX-x000 Series Programming Order Form upon placing order for any programming services 40.50
L-1874	Install Garmin GPS15XL-W in NX-1000 Series mobile Note: The KGS-3 & GPS15XL-W are not compatible with KGP-2A/2B AVL systems. 108.00

NEXEDGE®

NX-1700HAV/1800HAU

VHF/UHF Digital Upgradeable Mobile Radios

Table of Contents



All NX-1000 series mobiles include:

- Standard Microphone (KMC-65M)
- Mounting Bracket
- DC Cable
- 15A Fuse
- Instruction Manual
- Premium Warranty: 3 Years*

* All Accessories / options: 1 Year

■ GENERAL FEATURES

- 50 W (136-174 MHz) Model
- 45 W (400-470 MHz) Model
- Analog Mode
- Option NXDN Upgrade
- Optional DMR Upgrade
- AMBE+2™ VOCODER
- 260 CH-GID / 128 Zones
- 13-Segment 10-character LCD Display
- 7-color large LED indicator
- White Backlit
- KENWOOD Audio Quality
 - 6W (max) loud audio
 - Audio Equalizer: Flat, High, or Low
 - Auto Gain Control: On, High, or Low
 - Microphone type settings
- Multiple Scan Functions
 - Dual/Single Priority Scan, Single/Multi Zone Scan, Normal Scan
- Orange-colored Emergency button
- Horn Alert and Public Address function
- Ignition Sense function
- Voice Announcement
- DB15 Accessory Interface
- Lone Worker
- Max/Min Volume Setting
- Display Customization
- Power-on LED
- Menu Mode
- MIL-STD-810 C/D/E/F/G/H
- IP-54 Water & Dust Intrusion

■ ANALOG MODE

- Conventional Zones
- FleetSync®: PTT ID, Stun/Revive, Mute hold, Talk back, Selcall
- MDC-1200: PTT ID, Radio Inhibit/Unihabit, Radio Check, Emergency
- QT / DQT
- Two-Tone
- DTMF
- Built-in Voice Inversion Scrambler (per channel)
- Built-in Compander (per channel)

■ DIGITAL – NXDN® MODE (Optional)

- NXDN® Conventional & Site Roaming
- NXDN® Type-D Trunking Option
- 6.25 & 12.5 kHz Channels
- Over-the-Air Alias
- Digital / Analog Mixed Mode
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check & Control
- GPS Combination with additional module
- Late Entry
- NXDN® Scrambler

■ DIGITAL – DMR MODE (Optional)

- DMR Tier 2 Conventional & Site Roaming
- DMR Auto Slot Select (DASS)
- 12.5 kHz Channels
- Digital / Analog Mixed Mode
- Call Interrupt
- Group / Individual Call
- Status, Short Data, Paging Call
- Remote Stun, Kill, Monitor, Check & Control
- Over-the-Air Alias
- GPS Combination with additional module
- Late Entry
- ARC4 Encryption Option

OPTIONAL FEATURES

- NXDN Conventional Upgrade License (**KWD-1200CAK**)
- NXDN Type-D Trunking License (**KWD-1202TDK**) *Requires KWD-1200CAK enabled
- DMR Tier 2 Conventional Upgrade License (**KWD-1300CAK**)
- DMR ARC4 Enhanced Encryption (**KWD-1500EE**) *Only applicable after DMR conversion
- Remote Control Command by Subscriber Units (**KWD-1501RC**)

Digital mode conversion & Type-D requires additional firmware loading after applying upgrade license.
 Please download latest firmware from MyTools website > Product > Firmware

MODEL		LIST
NX-1700HAVK	136-174 MHz VHF 50W, 260 Ch / 128 Zones	548.30
NX-1800HAUK2	400-470 MHz UHF 45W, 260 Ch / 128 Zones	548.30
MOBILE INSTALLATION ACCESSORIES		LIST
KCT-60M	DB15-to-15pin Molex Adapter Cable	38.70
KCT-18	Ignition sense cable (requires KCT-60M Acc. Cable Option)	26.30
KLF-2	Line Filter (suppresses alternator whine, 25dB, 25A max).	56.30
KMB-10	Key lock adapter	35.20
CONTROL STATION INSTALLATION ACCESSORIES		LIST
KMC-9C	Control Station Desktop Microphone (8-pin mod. plug) Note: NOT compatible with TDMA operations	115.30
KMC-59C	Control Station Desktop Microphone (8-pin mod. plug) Note: Compatible with FDMA (analog / NXDN) and TDMA operations	255.50
KMB-34	Control Station Mounting Case for KPS-15 Power Supply and Mobiles (excludes TK-5x10/6110 series). (mobile mounting hardware included)	72.20
KPS-15	DC Switching Power Supply (117/230 VAC; 23A max. continuous, 25A peak)	232.00
MICROPHONES AND SPEAKERS		LIST
KMC-65M	MIL-SPEC Standard electret mobile microphone (8-pin mod. plug)	69.80
KMC-66M	MIL-SPEC Standard electret mobile microphone with 12 keypad (8-pin mod. plug)	126.70
KES-10W	External speaker, 8.5W rated, 4-Ohm, 3.5mm L-type pin plug	65.30
KES-5A	External speaker, 40W max input Note: requires KCT-60M installed.	80.30

NEXEDGE®	NX-1700HAV/1800HAU VHF/UHF Digital Upgradeable Mobile Radios	Table of Contents
----------	--	-------------------

GENERAL FEATURES	ANALOG MODE
------------------	-------------

	FleetSync® & NEXEDGE® AVL & MESSAGING	LIST
--	---------------------------------------	------

GPS15XL-W	Garmin Internal GPS Receiver Board for FleetSync AVL Note: • Conventional operation only. • Requires GA25 MCX GPS antenna. • Refer to www.garmin.com for GPS-15XL-W technical specifications. • Option: Order L-1874 for Kenwood Long Beach installation.	175.20
GA25MCX	Garmin On-dash Style Magnetic base GPS Antenna for GPS15XL-W Note: shipped loose only; Install GA25MCX antenna to GPS15XL-W before vehicle install.	83.20

SOFTWARE LICENSING & RADIO FEATURE OPTIONS	
--	--

IMPORTANT: NX-5000/5000S/3000/3x20/1x00 series radio requires **KPT-300LMC & L-5000** for activation of Radio Feature licenses.

Submit completed form to LMR Order Desk for all Software license and Radio Feature license options.

License Keys will be E-mailed to the address provided on the order form.

Form is available on MyTools website > Product > Forms

- FPU & Software Applications: Software License Key Request Form
- Radio Feature Licenses: Radio Feature License Keys Request Form

Note: Radio Feature License Keys are transferable from one radio to another radio within 72 hours of activation. If a Radio Feature License is transferred to another radio within the 72 hour window, the 72 hour clock is reset.

Radio Features	LIST
----------------	------

KWD-1200CAK	License Key for NXDN Conventional Upgrade	49.50
	License Key for NXDN Type-D Trunking	12.00
KWD-1202TDK	Note: Requires KWD-1200CAK (NXDN Conventional) enabled before applying NXDN Type-D Trunking license.	
KWD-1300CAK	License Key for DMR Tier2 Conventional Upgrade	49.50
KWD-1500EE	License key for DMR ARC4 Enhanced Encryption	39.70
	Note: ARC4 Enhanced Encryption is available only in DMR mode.	
KWD-1501RC	License Key for Remote Control by Subscriber Unit	39.70
	Note: - This license may be used by Administrator due to Stun/Revive/Kill. - The license is only required for transmission of Remote Control commands. - PC command for Remote Control does NOT require the license.	

SERVICE RELATED ACCESSORIES	LIST
-----------------------------	------

KPG-46XM	USB Programming interface cable	212.30
KPG-D6NK	License Key for KPG-D6NK Programming Software for NX-1000 series portable/mobile Note: Requires KPT-300LMC for authentication	122.80

INSTALLATION / TUNING CHARGES	LIST
-------------------------------	------

L-5001	Factory Activation of Radio Feature Licenses (per Radio) Note: Must purchase Radio Feature Licenses separately. KPT-300LMC's History Menu will not display the Radio Features activated by Factory.	129.70
L-1873	NX-1000 Series Mobiles Programming (with basic TX/RX check) Must submit <u>NX-x000 Series Programming Order Form</u> upon placing order for any programming services	40.50
L-1874	Install Garmin GPS15XL-W in NX-1000 Series mobile Note: The KGS-3 & GPS15XL-W are not compatible with KGP-2A/2B AVL systems.	108.00