



Sutabel-m analyse met eindsterkte op TXT_SAFE_klei_licht_16_175

Figuur 1: $\ln(s'v)$ vs $\ln(su)$

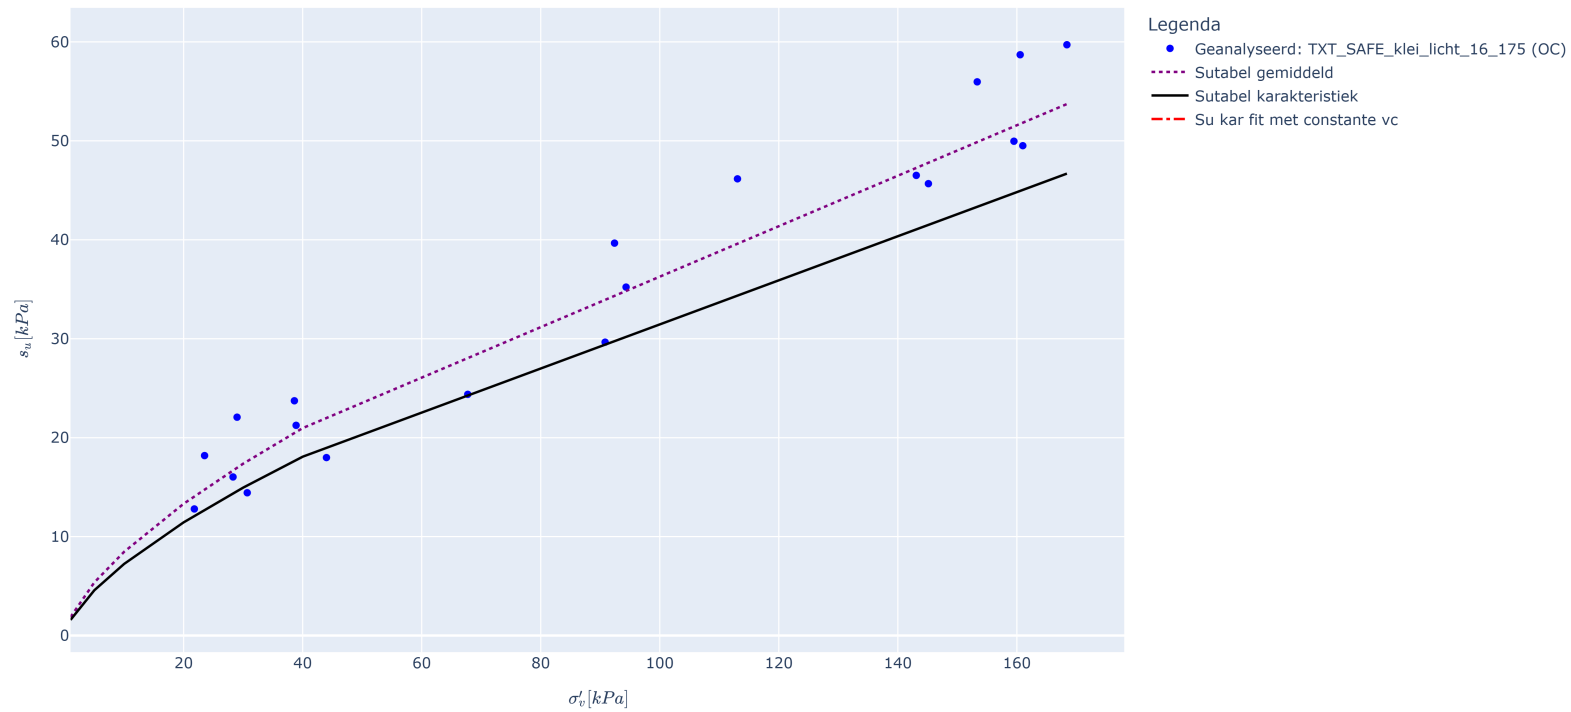

Figuur 2: s'v vs su

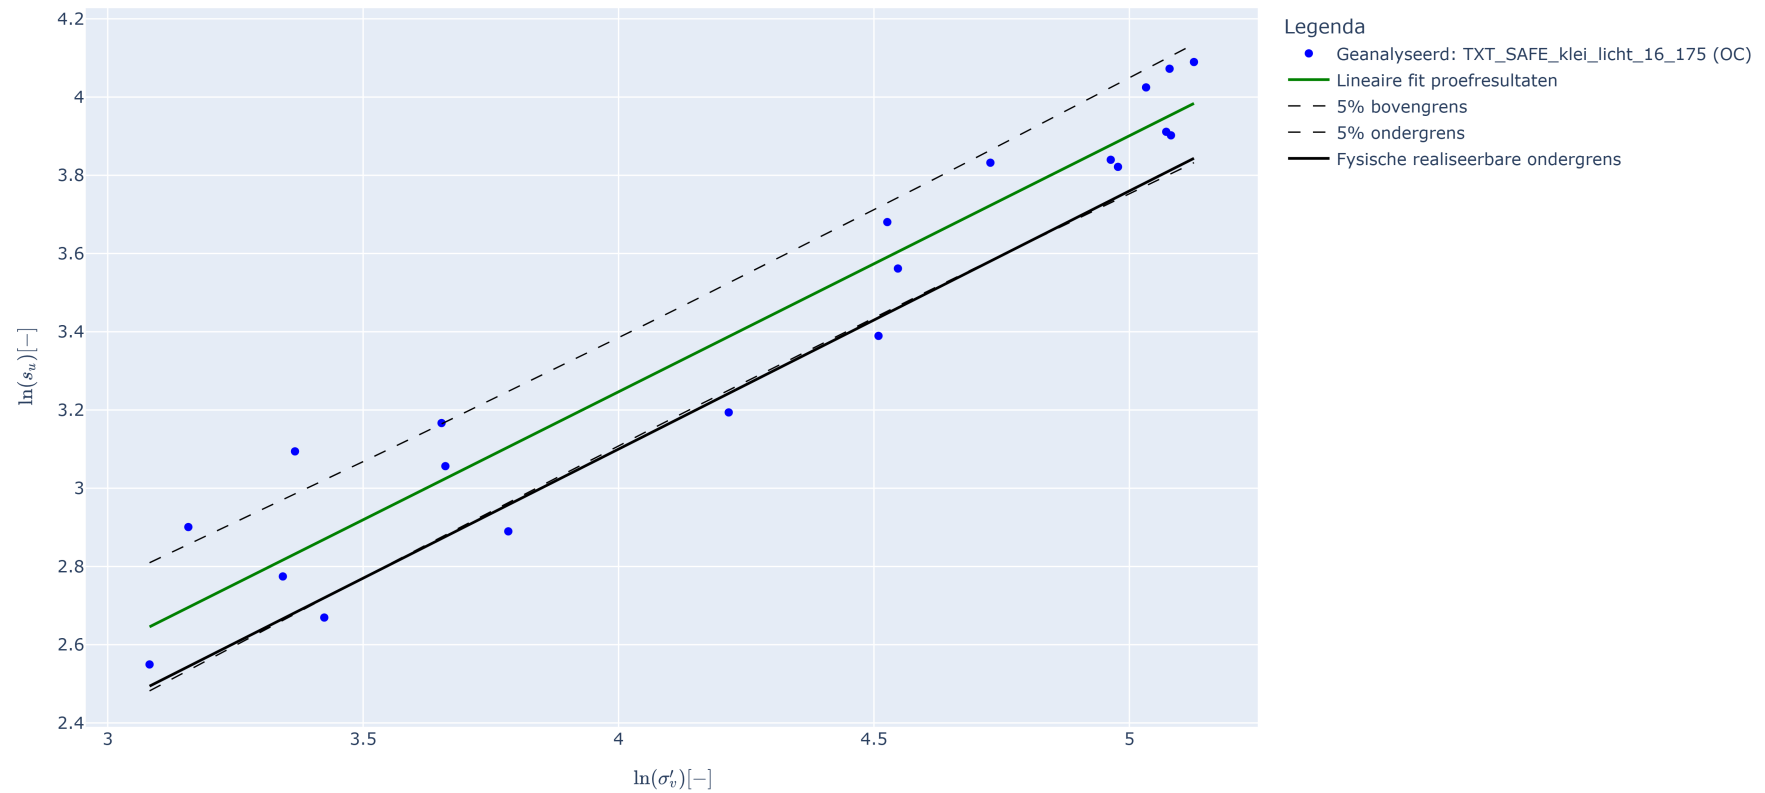

Parameters

Parameter	Waarde
e_a1 (snijpunt gemiddeld) [-]	0.628761
e_a2 (helling gemiddeld) [-]	0.654453
svgm_gem [kPa]	1.875285
m_gem [-]	0.345547
a1_kar (snijpunt karakteristiek) [-]	0.458137
a2_kar (helling karakteristiek) [-]	0.660722
svgm_kar [kPa]	1.584074
m_kar [-]	0.340000
vc_fit_kar [-]	0.000000
STDEV lognormaal [-]	0.000000
STEYX [-]	0.143834
Type verzameling: lokaal = 1.0; regionaal = 0.75	0.75
VGW nat gemiddeld [kN/m3]	16.835
Watergehalte gemiddeld	50.283

Sutabel grafiek data (su_gem en su_kar lijnen)

s'v [kPa]	su_gem [kPa]	su_kar [kPa]
1.0	1.875	1.584
5.0	5.377	4.582
10.0	8.463	7.241

20.0	13.321	11.441
30.0	17.369	14.951
40.0	20.967	18.077
168.41	53.718	46.685

Su fit met constante vc data

s'v [kPa]	ln(su_gem) [kPa]	ln(su_kar) [kPa]	su_kar fit met constante vc [kPa]
1.0	0.629	0.46	nan
5.0	1.682	1.522	nan
10.0	2.136	1.98	nan
20.0	2.589	2.437	nan
30.0	2.855	2.705	nan
40.0	3.043	2.895	nan
168.41	3.984	3.843	nan

Invoerselectie

Monster ID	Groep	Pos.	NAP Van [m]	NAP Tot [m]	Terreinspanning [kPa]	Grensspanning [kPa]	POP [-]	VGW nat [kN/m3]	Water [%]
1201.0_AW208.+124_B_BIK_M017-a	TXT_SAFE_klei_licht_16_175	KR	-3.82	-4.14	155.1	208.2	53.1	17.3	42.51
1224.0_AW215.+116_B_BIK_M011-a	TXT_SAFE_klei_licht_16_175	KR	-2.1	-2.4	107.3	194.0	86.7	16.53	49.57
1277.0_AW216.+198_B_BIK_M027-b	TXT_SAFE_klei_licht_16_175	KR	-10.03	-10.21	160.0	239.6	79.6	17.0	45.57
1400.0_AW299.+003_B_BIT_M012-a	TXT_SAFE_klei_licht_16_175	BIT	-5.17	-5.36	38.4	61.0	22.6	16.16	59.23
1502.0_VY021.+018_B_BUK_M018-a	TXT_SAFE_klei_licht_16_175	KR	-2.55	-2.8	144.8	164.6	19.8	17.41	42.57
1511.0_VY021.+018_B_BUK_M024-a	TXT_SAFE_klei_licht_16_175	KR	-5.55	-5.9	156.7	186.8	30.1	16.98	46.72
1574.0_AW298.+178_B_BIK_14-b	TXT_SAFE_klei_licht_16_175	KR	-1.02	-1.32	109.1	156.1	47.0	16.62	53.24
1623.0_VY010.+135_B_BIK_26	TXT_SAFE_klei_licht_16_175	KR	-6.51	-6.91	160.8	240.0	nan	17.41	41.83
1624.0_VY010.+135_B_BIK_27	TXT_SAFE_klei_licht_16_175	KR	-7.01	-7.41	164.53	242.3	77.77	16.56	53.4
1688.0_VY021.+019_B_BIT_19	TXT_SAFE_klei_licht_16_175	BIT	-5.52	-5.8	92.2	142.0	nan	16.54	53.32
1743.0_VY053.+108_B_BUK_21	TXT_SAFE_klei_licht_16_175	KR	-2.83	-3.23	168.8	200.0	83.0	16.72	45.3
1744.0_VY053.+108_B_BUK_22	TXT_SAFE_klei_licht_16_175	KR	-3.33	-3.68	171.2	250.0	nan	17.5	44.37
1767.0_VY093.+135_B_BUK_17	TXT_SAFE_klei_licht_16_175	KR	-1.34	-1.74	161.3	200.2	38.9	17.82	40.32
1784.0_VY093.+142_B_AL_7	TXT_SAFE_klei_licht_16_175	AL	-1.83	-2.2	31.83	54.5	nan	16.58	52.49
1787.0_VY093.+142_B_AL_9-b	TXT_SAFE_klei_licht_16_175	AL	-2.93	-3.23	40.11	64.07	23.96	16.67	60.77
2238.0_VY004.+186_B_MBIB_mo-14a	TXT_SAFE_klei_licht_16_175	BIT	-2.755	-3.095	100.2	200.0	nan	16.69	[-]
2450.0_VY050.+179_B_BIK_mo-23a	TXT_SAFE_klei_licht_16_175	KR	-4.373	-4.733	146.9	187.446	40.546	16.64	[-]
2472.0_VY050.+179_B_BIT_mo-15a	TXT_SAFE_klei_licht_16_175	BIT	-4.215	-4.535	68.6	91.429	22.829	16.27	[-]
2529.0_VY050.+179_B_MBIB_mo-22a	TXT_SAFE_klei_licht_16_175	BIT	-6.776	-7.056	95.4	120.4	nan	17.22	[-]
2537.0_VY059.+001_B_BIT_mo-07a	TXT_SAFE_klei_licht_16_175	BIT	0.028	-0.352	59.1	70.0	nan	16.423	[-]
2555.0_VY059.+002_B_BIK_mo-18a	TXT_SAFE_klei_licht_16_175	KR	-0.75	-1.145	143.0	210.0	nan	17.392	[-]
2690.0_VY079.+066_B_AL_mo-05a	TXT_SAFE_klei_licht_16_175	AL	-0.832	-1.197	22.1	47.1	nan	16.21	[-]
2691.0_VY079.+066_B_AL_mo-06a	TXT_SAFE_klei_licht_16_175	AL	-1.332	-1.672	24.2	49.2	nan	16.0	[-]

Monster ID	Groep	Pos.	NAP Van [m]	NAP Tot [m]	Terreinspanning [kPa]	Grensspanning [kPa]	POP [-]	VGW nat [kN/m3]	Water [%]
2746.0_VY079.+091_B_BIK_mo-18a	TXT_SAFE_klei_licht_16_175	KR	-1.939	-2.309	130.2	200.0	nan	16.51	[-]
2756.0_VY079.+091_B_BIT_mo-03a	TXT_SAFE_klei_licht_16_175	BIT	-0.982	-1.322	28.6	78.543	49.943	16.03	[-]
2976.0_VY022.+188_B_BIT_M014-b	TXT_SAFE_klei_licht_16_175	BIT	-5.93	-6.19	39.8	63.931	24.131	16.16	66.04
2982.0_VY022.+188_B_BIT_M018-a	TXT_SAFE_klei_licht_16_175	BIT	-7.88	-8.19	44.4	70.0	nan	17.35	49.95
3152.0_VY032.+004_B_BIT_M008-a	TXT_SAFE_klei_licht_16_175	BIT	-1.52	-1.86	38.0	70.138	32.138	16.46	44.43
3176.0_VY032.+003_B_AL_M007-a	TXT_SAFE_klei_licht_16_175	AL	-1.75	-2.04	29.0	76.747	47.747	16.29	57.61
3182.0_VY032.+003_B_AL_M012-a	TXT_SAFE_klei_licht_16_175	AL	-4.25	-4.65	36.8	120.0	nan	16.44	56.43
3743.0_AW207.+162_B_BIK_mo-22	TXT_SAFE_klei_licht_16_175	KR	-4.5	-4.873	139.3	204.4	65.1	17.5	[-]
3824.0_AW213.+167_B_BIK_mo-32	TXT_SAFE_klei_licht_16_175	KR	-10.836	-11.227	135.0	192.6	57.6	16.6	[-]
3859.0_AW213.+167_B_BIT_mo-31	TXT_SAFE_klei_licht_16_175	BIT	-10.546	-10.946	113.2	193.8	80.6	17.3	[-]
3911.0_AW217.+083_B_AL_mo-22	TXT_SAFE_klei_licht_16_175	AL	-11.006	-11.4	52.9	83.9	31.0	17.0	[-]
3952.0_AW217.+084_B_BIK_mo-34	TXT_SAFE_klei_licht_16_175	KR	-11.049	-11.449	175.4	198.5	23.1	17.1	[-]
3978.0_AW217.+084_B_BIT_mo-21	TXT_SAFE_klei_licht_16_175	BIT	-4.686	-5.071	121.8	182.4	60.6	16.9	[-]
3991.0_AW217.+084_B_BIT_mo-34	TXT_SAFE_klei_licht_16_175	BIT	-11.186	-11.576	140.2	217.7	77.5	17.5	[-]
4004.0_AW230.+080_B_AL_mo-06	TXT_SAFE_klei_licht_16_175	AL	-1.799	-2.174	22.2	52.2	nan	16.7	[-]
4072.0_AW230.+082_B_BIT_mo-13	TXT_SAFE_klei_licht_16_175	BIT	-2.81	-3.19	91.5	164.1	nan	17.6	[-]
4199.0_AW240.+027_B_BIK_mo-15	TXT_SAFE_klei_licht_16_175	KR	-0.234	-0.6	122.4	149.3	26.9	17.3	[-]