



Sutabel-m analyse met eindsterkte op TXT_SAFE_klei_licht_16_175

SU-tabel (σ'_v - s_u relatie)

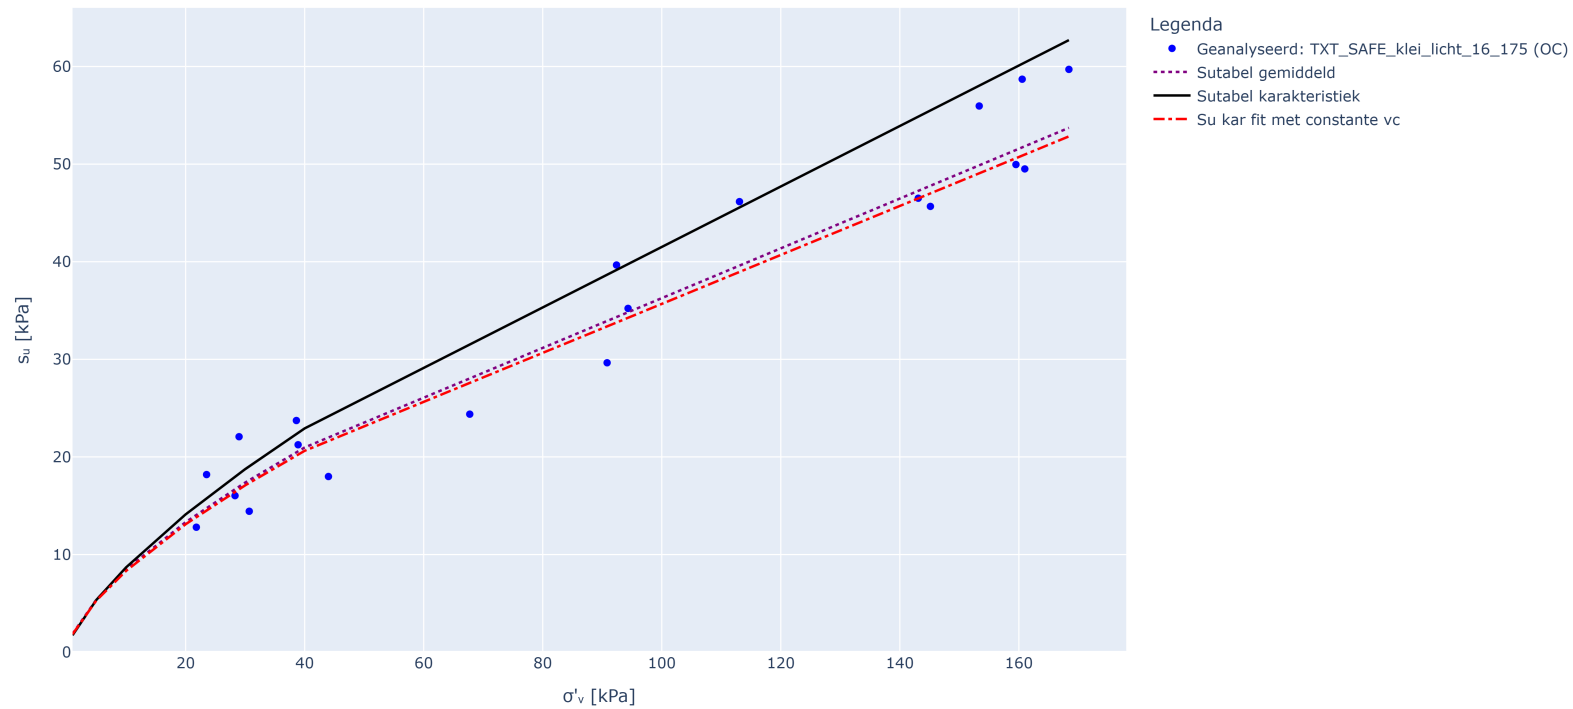

SU - tabel logaritmisch (LN(s'vc) - LN(su))

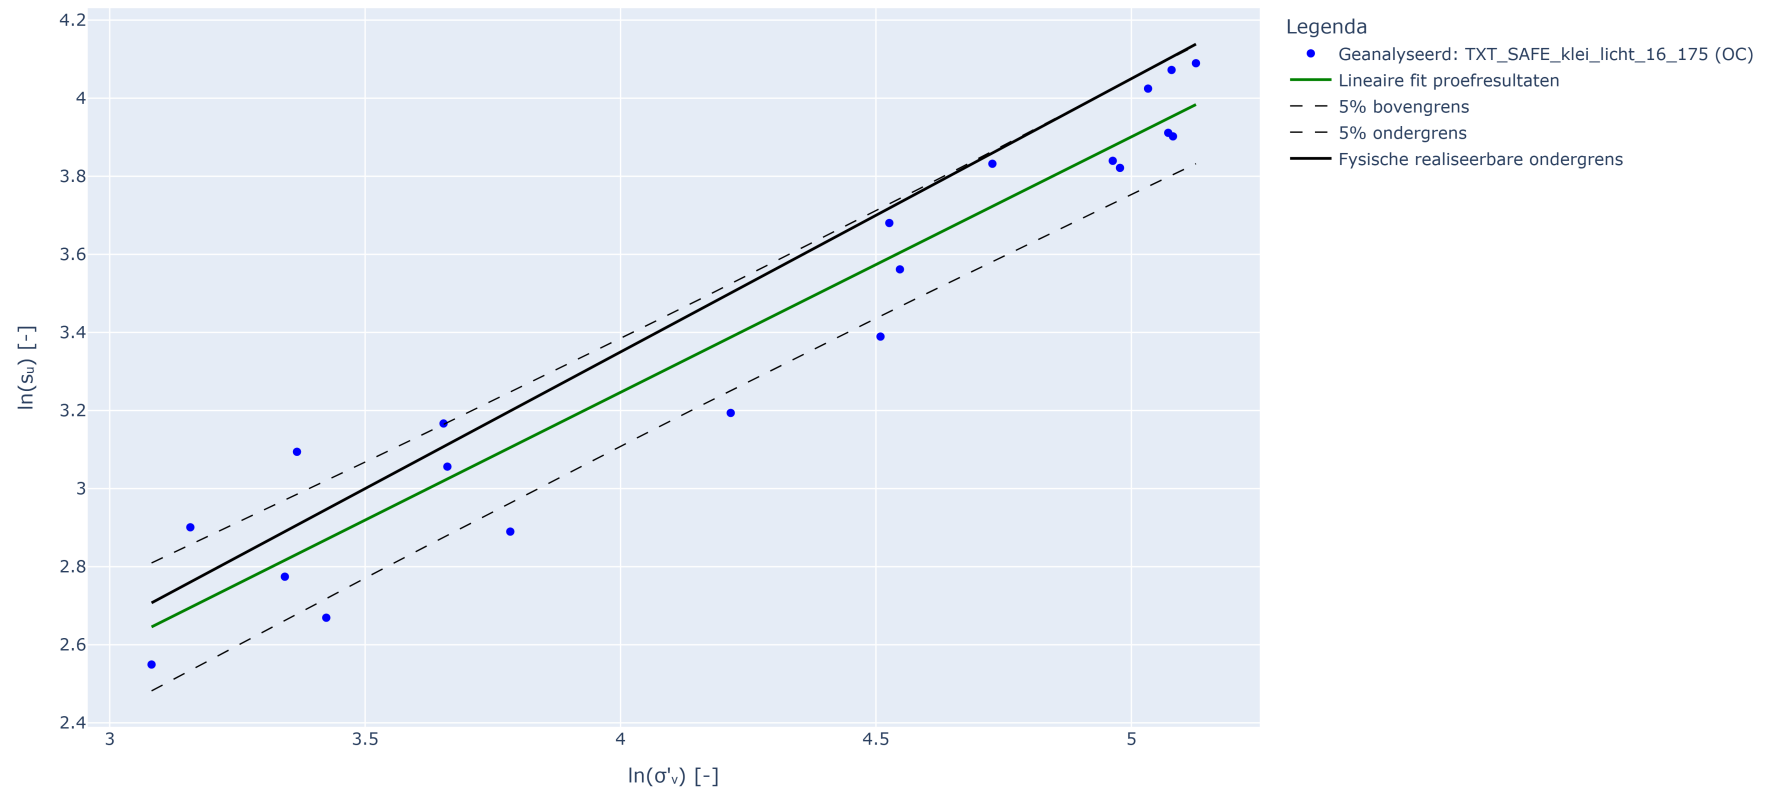

Parameters

Parameter	Waarde
e_a1 (snijpunt gemiddeld) [-]	0.629
e_a2 (helling gemiddeld) [-]	0.654
svgm_gem [kPa]	1.875
m_gem [-]	0.346
a1_kar (snijpunt karakteristiek) [-]	0.458
a2_kar (helling karakteristiek) [-]	0.661
svgm_kar [kPa]	1.733
m_kar [-]	0.300
vc_fit_kar [-]	0.010
STDEV lognormaal [-]	0.010
STEYX [-]	0.144
Type verzameling: lokaal = 1.0; regionaal = 0.75	0.75
VGW nat gemiddeld [kN/m3]	16.83
Watergehalte gemiddeld [%]	50.28

Sutabel grafiek data (su_gem en su_kar lijnen)

s'v [kPa]	su_gem [kPa]	su_kar [kPa]
1.0	1.875	1.733
5.0	5.377	5.347
10.0	8.463	8.687

20.0	13.321	14.112
30.0	17.369	18.743
40.0	20.967	22.925
168.41	53.718	62.707

Su fit met constante vc data

s'v [kPa]	ln(su_gem) [kPa]	ln(su_kar) [kPa]	su_kar fit met constante vc [kPa]
1.0	0.629	0.55	1.845
5.0	1.682	1.677	5.289
10.0	2.136	2.162	8.324
20.0	2.589	2.647	13.103
30.0	2.855	2.931	17.085
40.0	3.043	3.132	20.624
168.41	3.984	4.138	52.839

Invoerselectie

Monster ID	Groep	Pos.	NAP Van [m]	NAP Tot [m]	Terreinspanning [kPa]	Grensspanning [kPa]	POP [-]	VGW nat [kN/m3]	Water [%]
1201.0_AW208.+124_B_BIK_M017-a	TXT_SAFE_klei_licht_16_175	KR	-3.82	-4.14	155.1	208.2	53.1	17.3	42.5
1224.0_AW215.+116_B_BIK_M011-a	TXT_SAFE_klei_licht_16_175	KR	-2.1	-2.4	107.3	194.0	86.7	16.53	49.6
1277.0_AW216.+198_B_BIK_M027-b	TXT_SAFE_klei_licht_16_175	KR	-10.03	-10.21	160.0	239.6	79.6	17.0	45.6
1400.0_AW299.+003_B_BIT_M012-a	TXT_SAFE_klei_licht_16_175	BIT	-5.17	-5.36	38.4	61.0	22.6	16.16	59.2
1502.0_VY021.+018_B_BUK_M018-a	TXT_SAFE_klei_licht_16_175	KR	-2.55	-2.8	144.8	164.6	19.8	17.41	42.6
1511.0_VY021.+018_B_BUK_M024-a	TXT_SAFE_klei_licht_16_175	KR	-5.55	-5.9	156.7	186.8	30.1	16.98	46.7
1574.0_AW298.+178_B_BIK_14-b	TXT_SAFE_klei_licht_16_175	KR	-1.02	-1.32	109.1	156.1	47.0	16.62	53.2
1623.0_VY010.+135_B_BIK_26	TXT_SAFE_klei_licht_16_175	KR	-6.51	-6.91	160.8	240.0	nan	17.41	41.8
1624.0_VY010.+135_B_BIK_27	TXT_SAFE_klei_licht_16_175	KR	-7.01	-7.41	164.53	242.3	77.77	16.56	53.4
1688.0_VY021.+019_B_BIT_19	TXT_SAFE_klei_licht_16_175	BIT	-5.52	-5.8	92.2	142.0	nan	16.54	53.3
1743.0_VY053.+108_B_BUK_21	TXT_SAFE_klei_licht_16_175	KR	-2.83	-3.23	168.8	200.0	83.0	16.72	45.3
1744.0_VY053.+108_B_BUK_22	TXT_SAFE_klei_licht_16_175	KR	-3.33	-3.68	171.2	250.0	nan	17.5	44.4
1767.0_VY093.+135_B_BUK_17	TXT_SAFE_klei_licht_16_175	KR	-1.34	-1.74	161.3	200.2	38.9	17.82	40.3
1784.0_VY093.+142_B_AL_7	TXT_SAFE_klei_licht_16_175	AL	-1.83	-2.2	31.83	54.5	nan	16.58	52.5
1787.0_VY093.+142_B_AL_9-b	TXT_SAFE_klei_licht_16_175	AL	-2.93	-3.23	40.11	64.07	23.96	16.67	60.8
2238.0_VY004.+186_B_MBIB_mo-14a	TXT_SAFE_klei_licht_16_175	BIT	-2.755	-3.095	100.2	200.0	nan	16.69	[-]
2450.0_VY050.+179_B_BIK_mo-23a	TXT_SAFE_klei_licht_16_175	KR	-4.373	-4.733	146.9	187.446	40.546	16.64	[-]
2472.0_VY050.+179_B_BIT_mo-15a	TXT_SAFE_klei_licht_16_175	BIT	-4.215	-4.535	68.6	91.429	22.829	16.27	[-]
2529.0_VY050.+179_B_MBIB_mo-22a	TXT_SAFE_klei_licht_16_175	BIT	-6.776	-7.056	95.4	120.4	nan	17.22	[-]
2537.0_VY059.+001_B_BIT_mo-07a	TXT_SAFE_klei_licht_16_175	BIT	0.028	-0.352	59.1	70.0	nan	16.42	[-]
2555.0_VY059.+002_B_BIK_mo-18a	TXT_SAFE_klei_licht_16_175	KR	-0.75	-1.145	143.0	210.0	nan	17.39	[-]
2690.0_VY079.+066_B_AL_mo-05a	TXT_SAFE_klei_licht_16_175	AL	-0.832	-1.197	22.1	47.1	nan	16.21	[-]
2691.0_VY079.+066_B_AL_mo-06a	TXT_SAFE_klei_licht_16_175	AL	-1.332	-1.672	24.2	49.2	nan	16.0	[-]

Monster ID	Groep	Pos.	NAP Van [m]	NAP Tot [m]	Terreinspanning [kPa]	Grensspanning [kPa]	POP [-]	VGW nat [kN/m3]	Water [%]
2746.0_VY079.+091_B_BIK_mo-18a	TXT_SAFE_klei_licht_16_175	KR	-1.939	-2.309	130.2	200.0	nan	16.51	[-]
2756.0_VY079.+091_B_BIT_mo-03a	TXT_SAFE_klei_licht_16_175	BIT	-0.982	-1.322	28.6	78.543	49.943	16.03	[-]
2976.0_VY022.+188_B_BIT_M014-b	TXT_SAFE_klei_licht_16_175	BIT	-5.93	-6.19	39.8	63.931	24.131	16.16	66.0
2982.0_VY022.+188_B_BIT_M018-a	TXT_SAFE_klei_licht_16_175	BIT	-7.88	-8.19	44.4	70.0	nan	17.35	50.0
3152.0_VY032.+004_B_BIT_M008-a	TXT_SAFE_klei_licht_16_175	BIT	-1.52	-1.86	38.0	70.138	32.138	16.46	44.4
3176.0_VY032.+003_B_AL_M007-a	TXT_SAFE_klei_licht_16_175	AL	-1.75	-2.04	29.0	76.747	47.747	16.29	57.6
3182.0_VY032.+003_B_AL_M012-a	TXT_SAFE_klei_licht_16_175	AL	-4.25	-4.65	36.8	120.0	nan	16.44	56.4
3743.0_AW207.+162_B_BIK_mo-22	TXT_SAFE_klei_licht_16_175	KR	-4.5	-4.873	139.3	204.4	65.1	17.5	[-]
3824.0_AW213.+167_B_BIK_mo-32	TXT_SAFE_klei_licht_16_175	KR	-10.836	-11.227	135.0	192.6	57.6	16.6	[-]
3859.0_AW213.+167_B_BIT_mo-31	TXT_SAFE_klei_licht_16_175	BIT	-10.546	-10.946	113.2	193.8	80.6	17.3	[-]
3911.0_AW217.+083_B_AL_mo-22	TXT_SAFE_klei_licht_16_175	AL	-11.006	-11.4	52.9	83.9	31.0	17.0	[-]
3952.0_AW217.+084_B_BIK_mo-34	TXT_SAFE_klei_licht_16_175	KR	-11.049	-11.449	175.4	198.5	23.1	17.1	[-]
3978.0_AW217.+084_B_BIT_mo-21	TXT_SAFE_klei_licht_16_175	BIT	-4.686	-5.071	121.8	182.4	60.6	16.9	[-]
3991.0_AW217.+084_B_BIT_mo-34	TXT_SAFE_klei_licht_16_175	BIT	-11.186	-11.576	140.2	217.7	77.5	17.5	[-]
4004.0_AW230.+080_B_AL_mo-06	TXT_SAFE_klei_licht_16_175	AL	-1.799	-2.174	22.2	52.2	nan	16.7	[-]
4072.0_AW230.+082_B_BIT_mo-13	TXT_SAFE_klei_licht_16_175	BIT	-2.81	-3.19	91.5	164.1	nan	17.6	[-]
4199.0_AW240.+027_B_BIK_mo-15	TXT_SAFE_klei_licht_16_175	KR	-0.234	-0.6	122.4	149.3	26.9	17.3	[-]