




Battery, key switch, 5 V boost

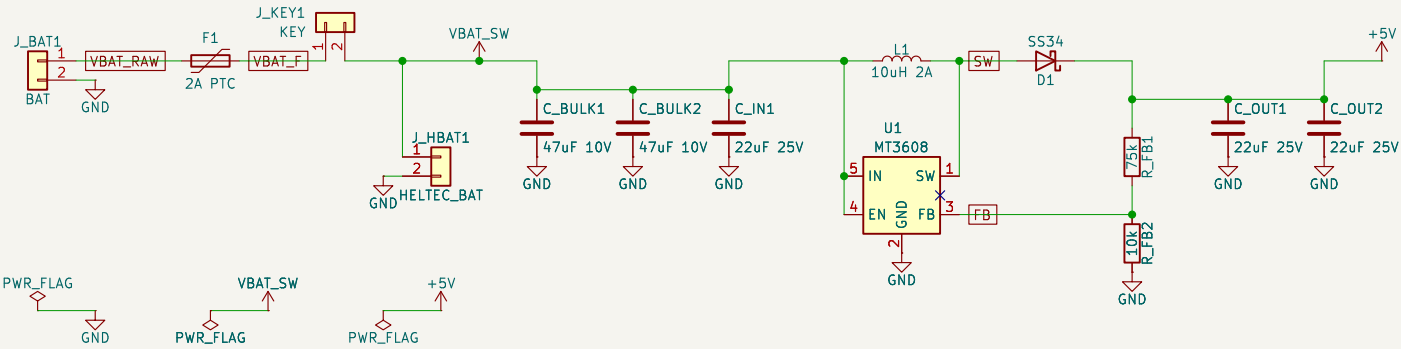


I2S speaker amp

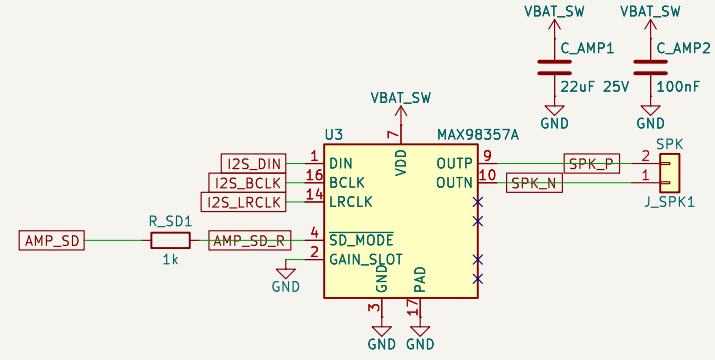


Heltec V4 headers

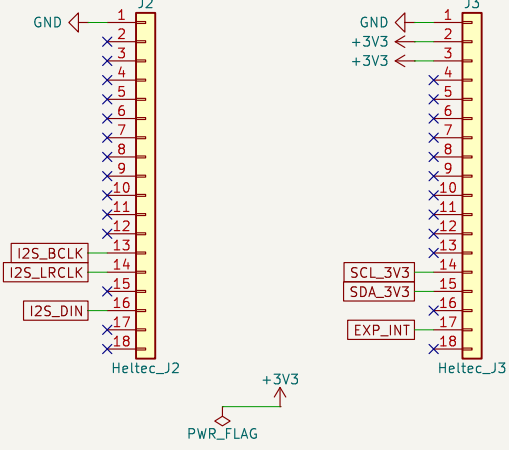


I2C level shifter, LCD (5 V), NFC (3.3 V)

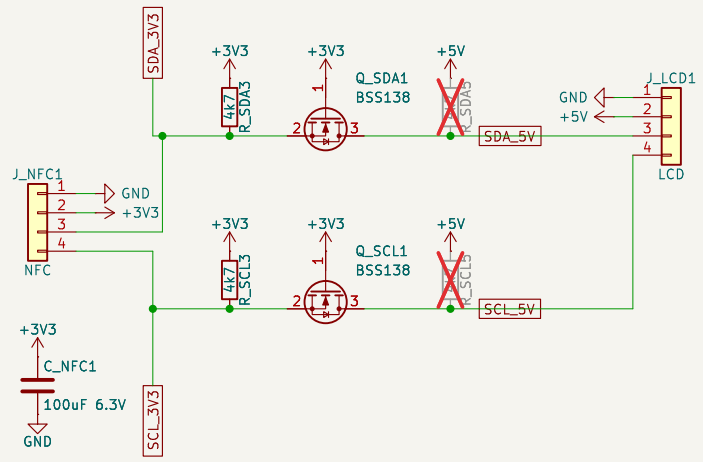

GPIO expander (0x20), button inputs

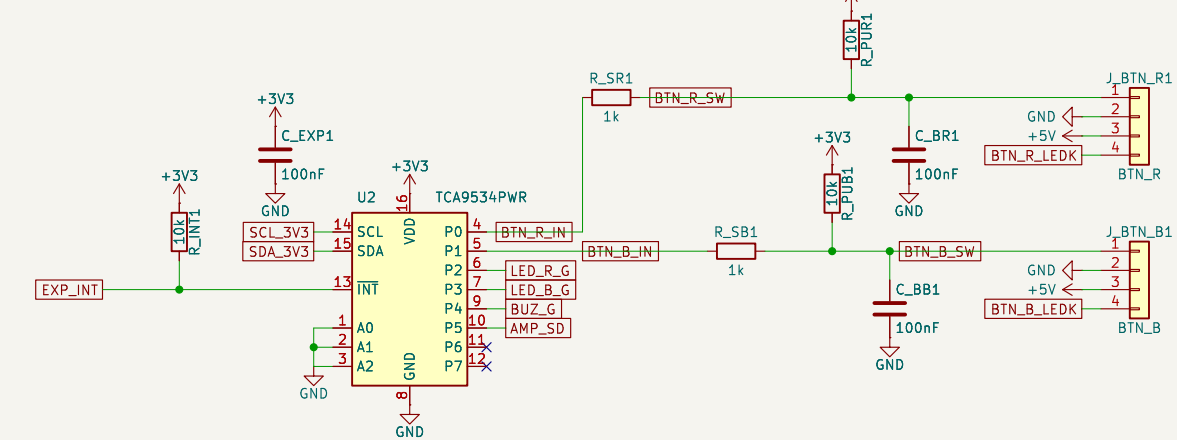

Low-side drivers: button LEDs, buzzer

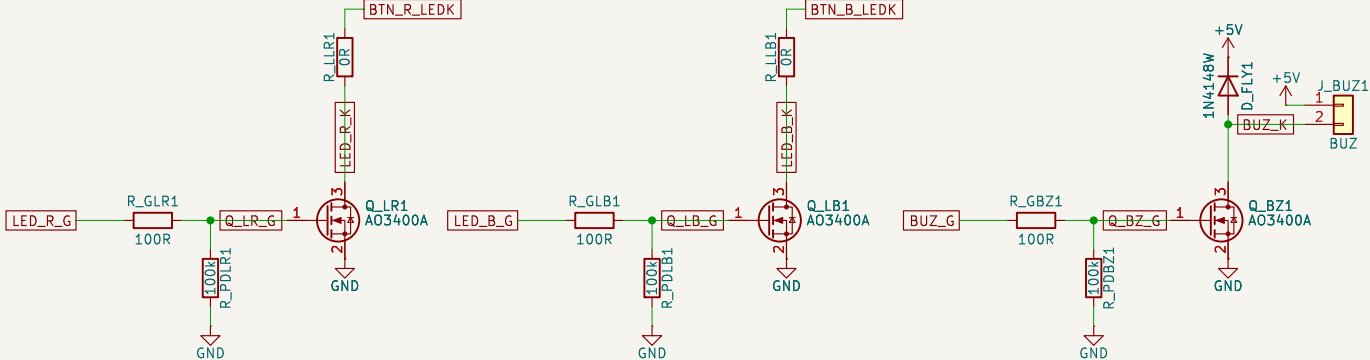

Mounting holes

