


Power in (from pack board)

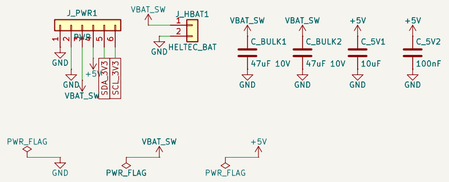


I2C level shifter, LCD (5 V), NFC (3.3 V)

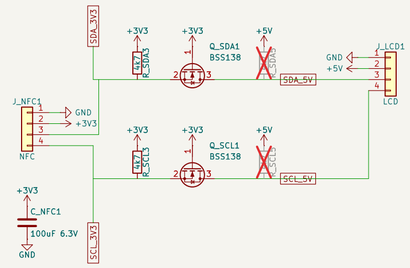

GPIO expander (0x20), button inputs

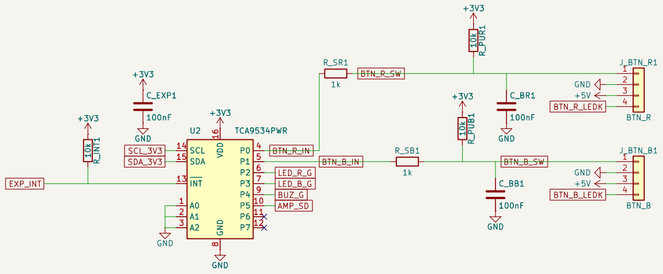


Low-side drivers: button LEDs, buzzer

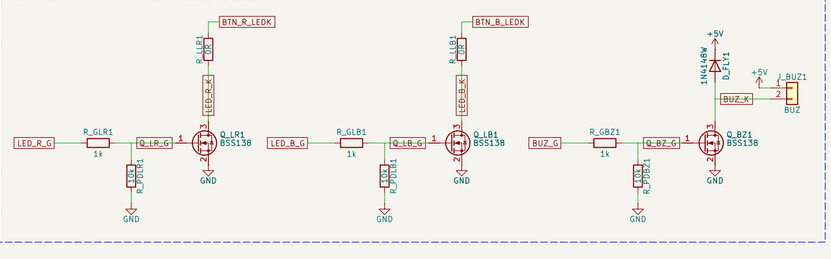


Mounting holes




Heltec V4 headers



Debug: UART, I2C, test pads

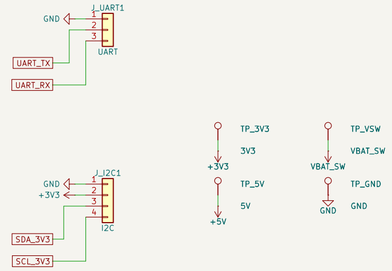

I2S DAC and speaker amp

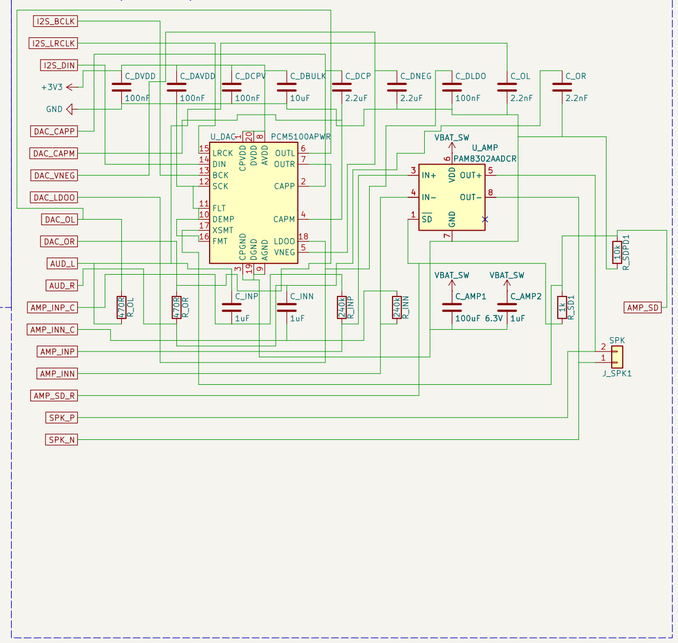

Sheet info

Sheet: /
File: carrier_tme.kicad_sch

Title: AirsoftCounter v2 carrier (hand-build)

Size: A2 | Date: | Rev:
KiCad E.D.A. 10.0.7 | Id: 1/1