


USB-C input, BQ25601 charger

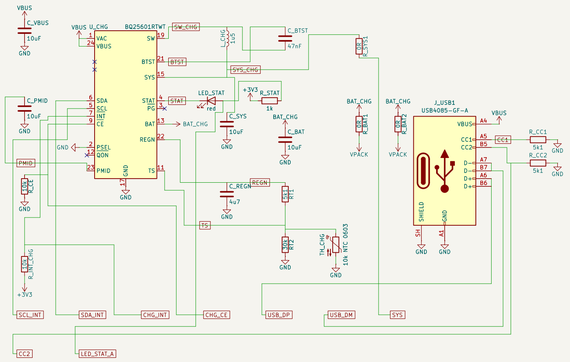


Diode-OR and 3V3 LDO

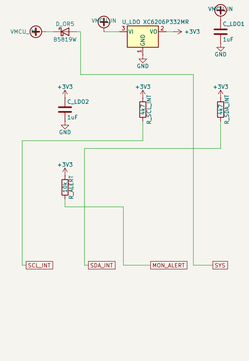


STM32L072 MCU, reset/boot, test pads

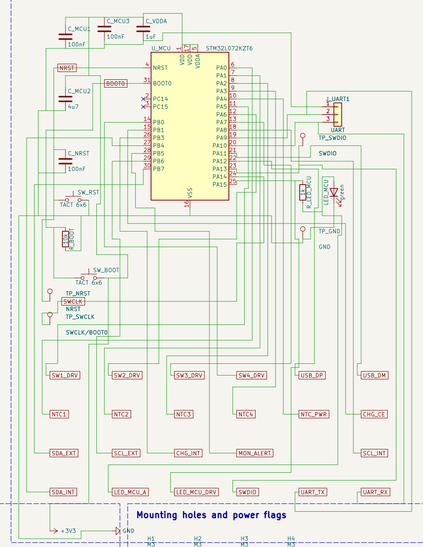


Key switch, 2 A PTC, 5 V boost, J_PWR1

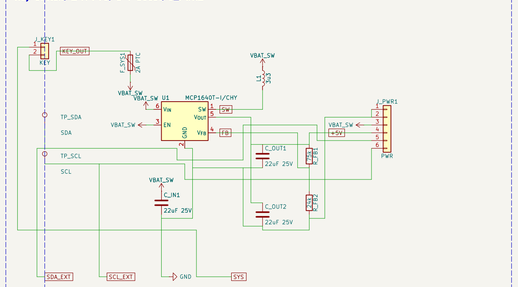


Cell 1 branch + INA226

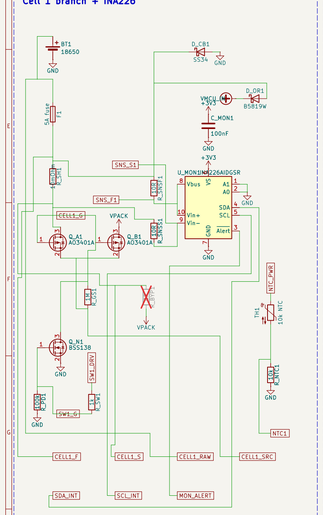


Cell 2 branch + INA226

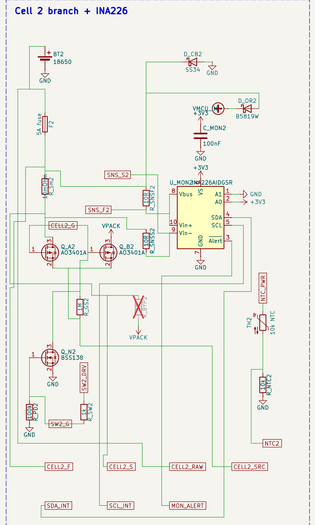


Cell 3 branch + INA226

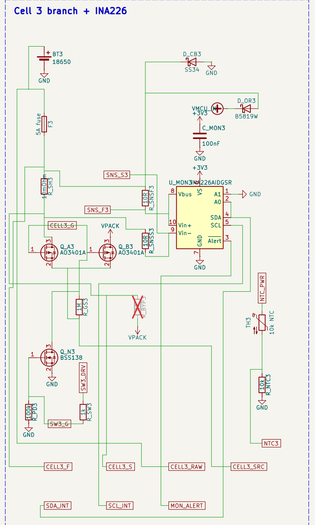

Cell 4 branch + INA226

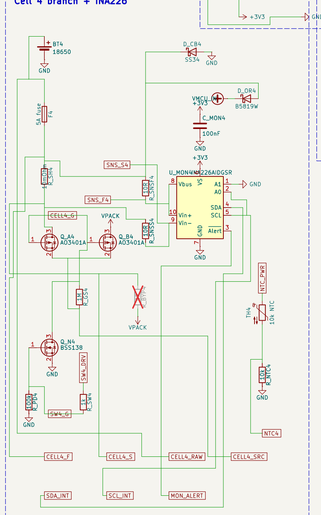

Mounting holes and power flags

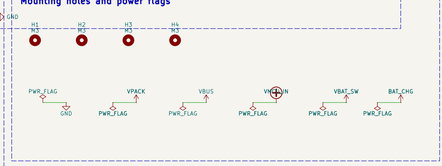

Sheet: /
File: pack_1me.kicad_sch
Title: AirsoftCounter v2 pack (hand-build)
Size: A1
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: 1/1