


Power in (from pack board)

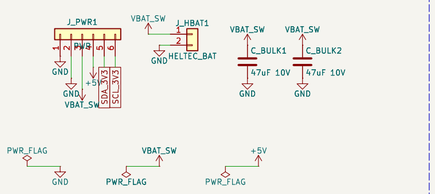


I2C level shifter, LCD (5 V), NFC (3.3 V)

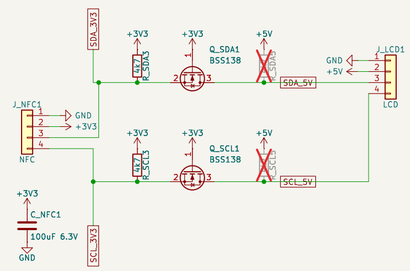

GPIO expander (0x20), button inputs

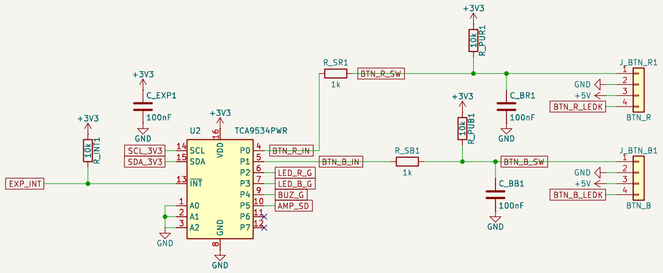


Low-side drivers: button LEDs, buzzer

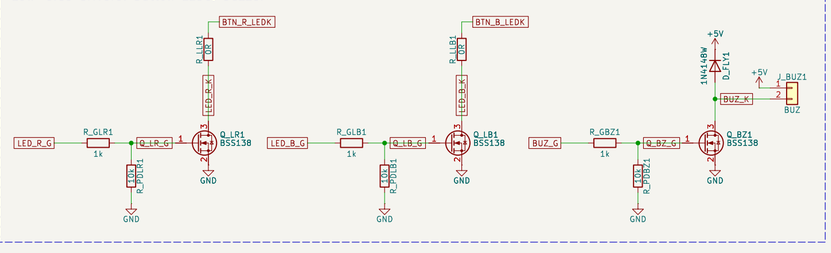


Mounting holes




Heltec V4 headers



I2S DAC and speaker amp

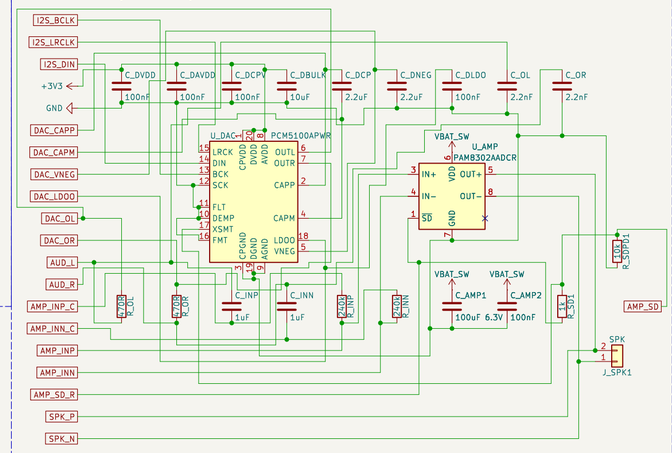

Debug: UART, I2C, test pads

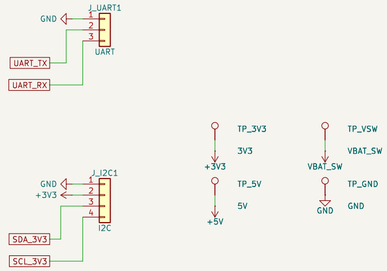

Sheet: /		
File: carrier_tme.kicad_sch		
Title:		
Size: A2	Date:	**Rev:**
KiCad E.D.A. 9.0.8		Id: 1/1