


LiPo input: fuse, reverse FET, TVS

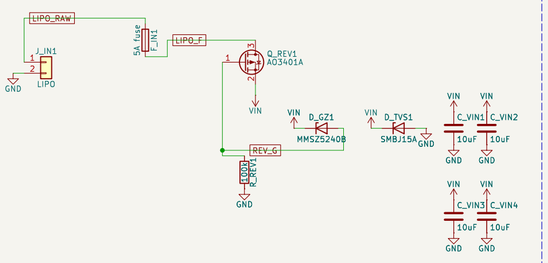


Key enable, MCU kill, J_PWR1

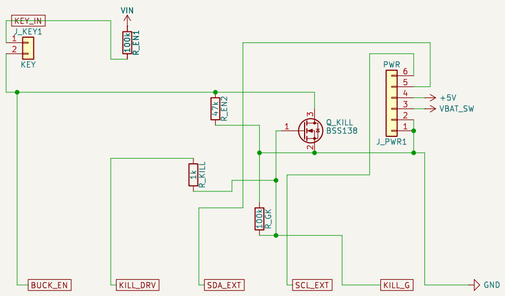


Buck A 4.10 V (VBAT_SW), buck B 5.07 V (+5V)

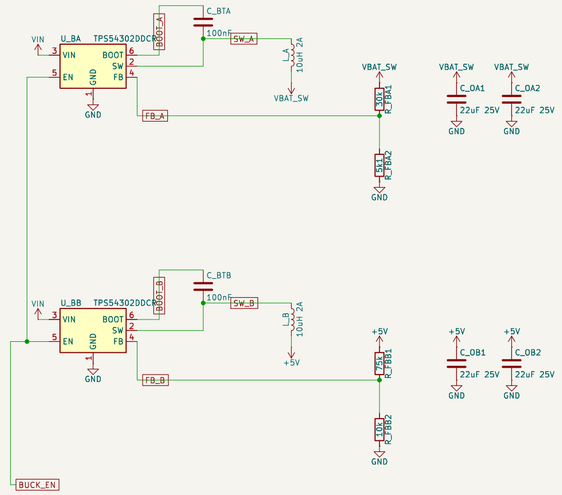


Balance lead dividers

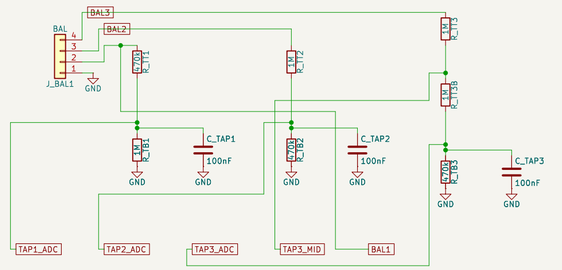

Always-on 3V3, STM32C071, SWD pads

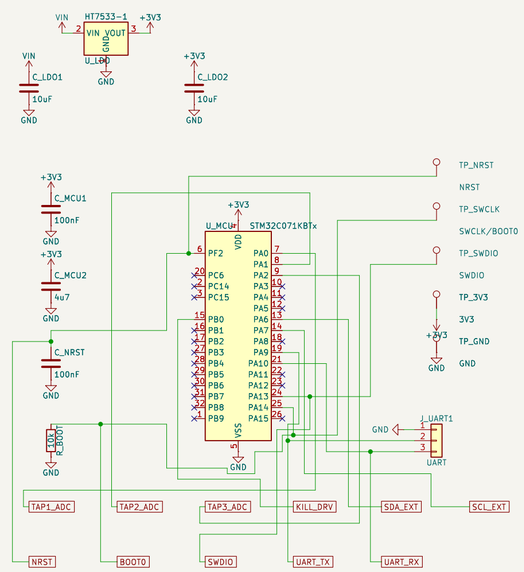

Mounting holes and power flags

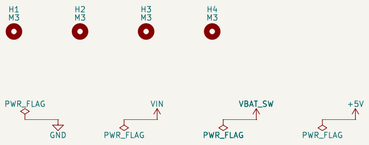

Sheet: /		
File: lipo.kicad_sch		
Title:		
Size: A2	Date:	**Rev:**
KiCad E.D.A. 9.0.8		Id: 1/1