


## LiPo input: fuse, reverse FET, TVS

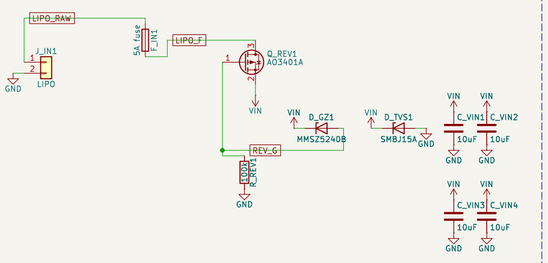


## Buck A 4.10 V (VBAT_SW), buck B 5.07 V (+5V)

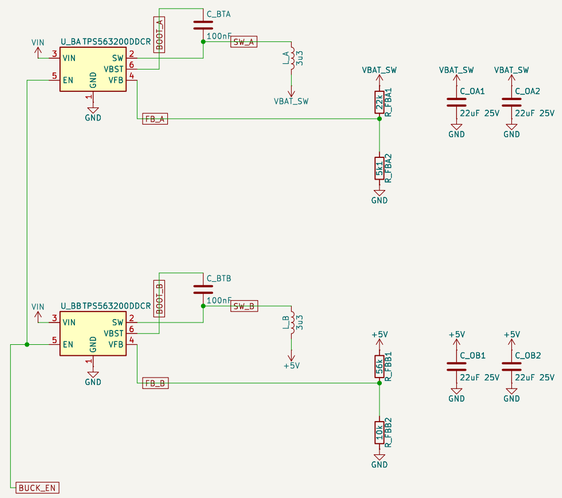


## Always-on 3V3, STM32L072, SWD pads

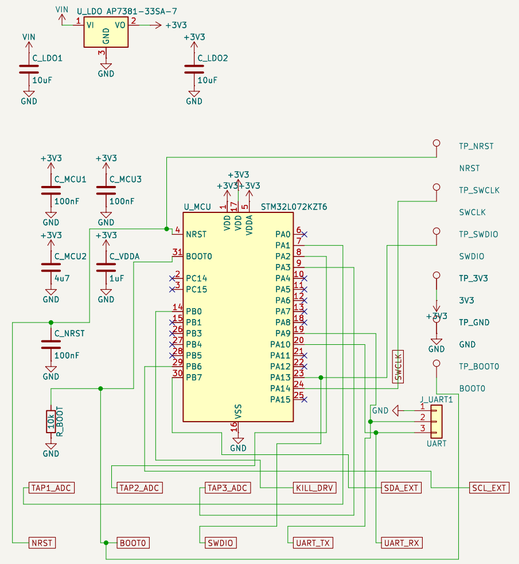


## Key enable, MCU kill, J_PWR1




## Balance lead dividers




## Mounting holes and power flags




| | | |
|---|---|---|
| Sheet: / | | |
| File: lipo_tme.kicad_sch | | |
| **Title:** | | |
| Size: A2 | Date: | **Rev:** |
| KiCad E.D.A. 9.0.8 | | Id: 1/1 |