


USB-C input, BQ25601 charger

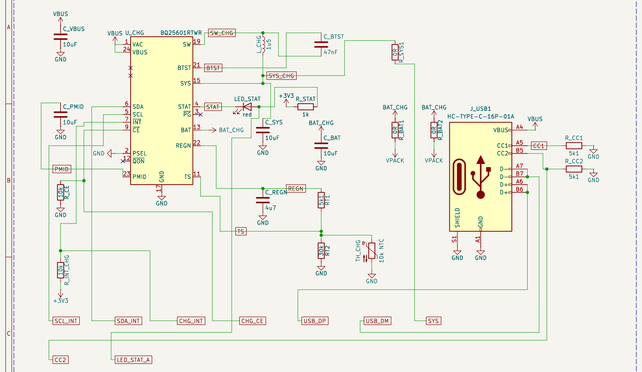


Cell monitoring (PAC1934), diode-OR, 3V3 LDO

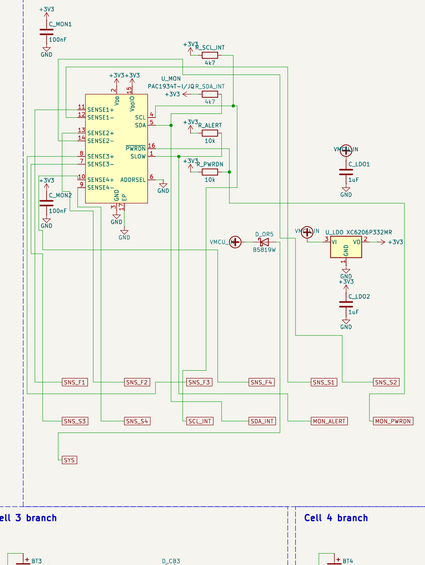


STM32C071 MCU, reset/boot, test pads

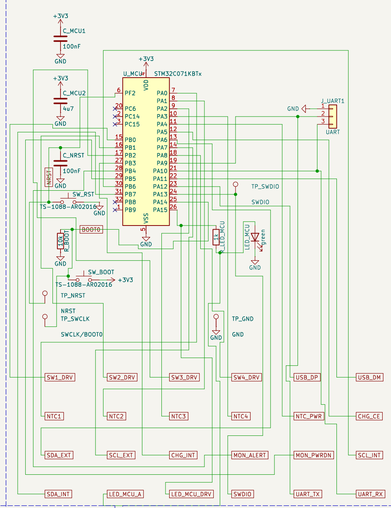


Key switch, 2 A PTC, 5 V boost, J_PWR1

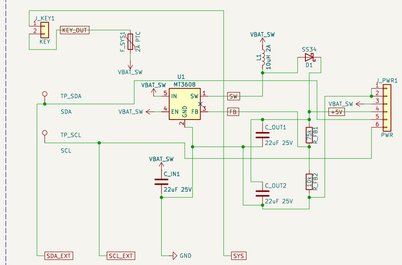


Cell 1 branch

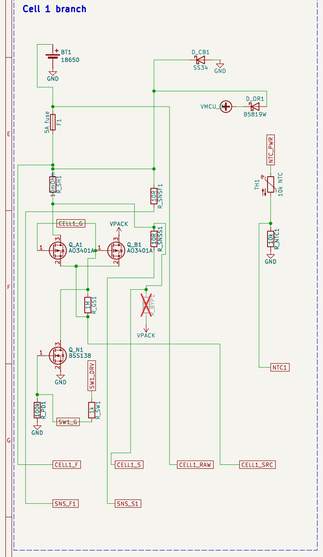


Cell 2 branch

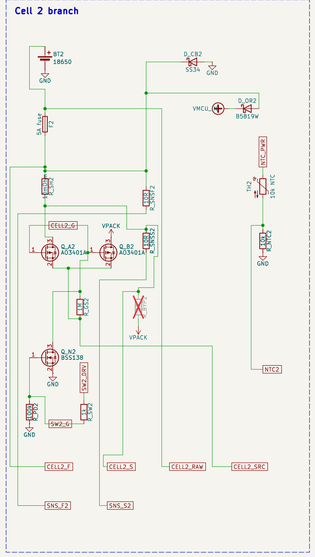


Cell 3 branch

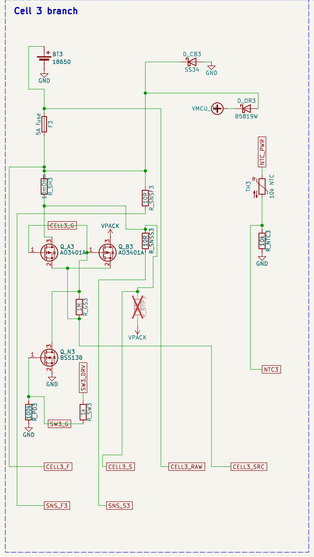

Cell 4 branch

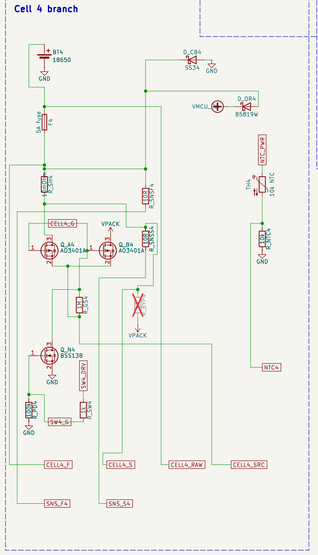

Mounting holes and power flags

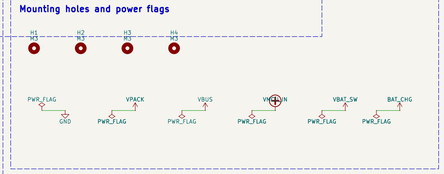

Sheet: /	
File: pack.kicad_sch	
Title:	
Size: A1	Date:
KiCad E.D.A. 9.0.8	Rev:
	Id: 1/1