


USB-C input, BQ25601 charger

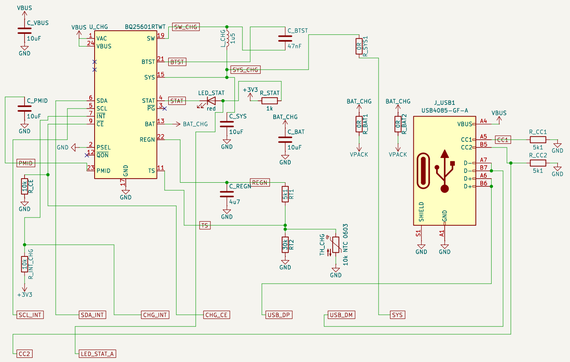


Diode-OR and 3V3 LDO

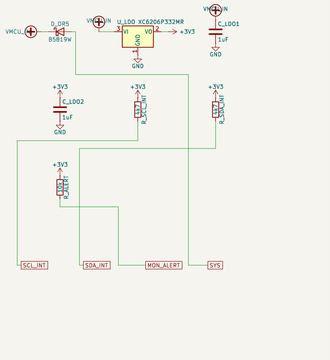


STM32L072 MCU, reset/boot, test pads

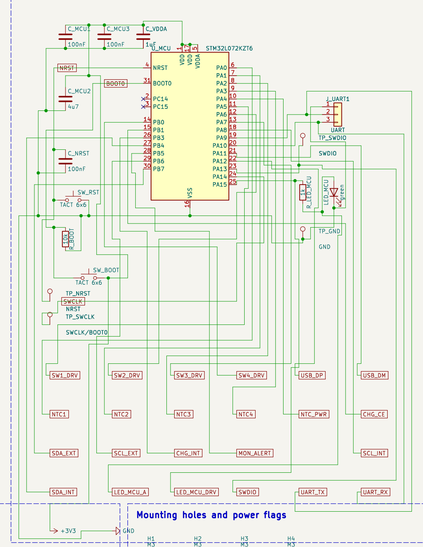


Key switch, 2 A PTC, 5 V boost, J_PWR1

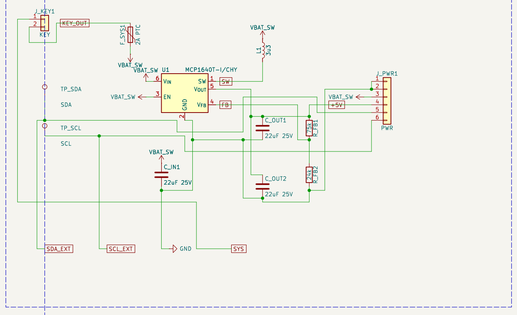


Cell 1 branch + INA226

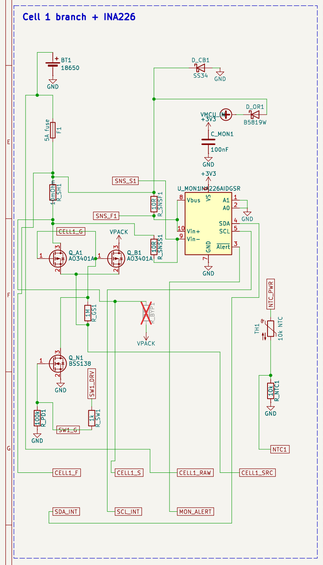


Cell 2 branch + INA226

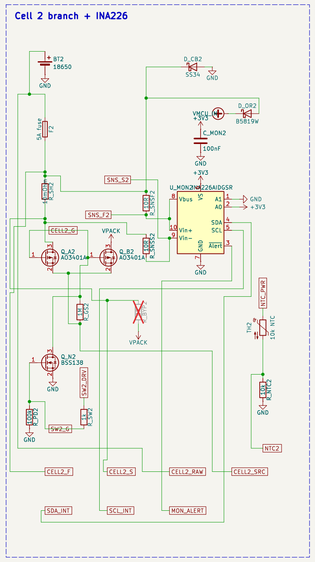


Cell 3 branch + INA226

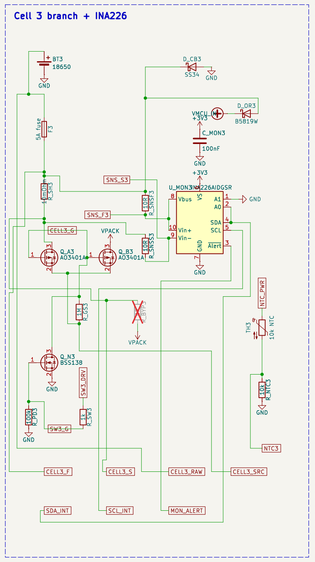

Cell 4 branch + INA226

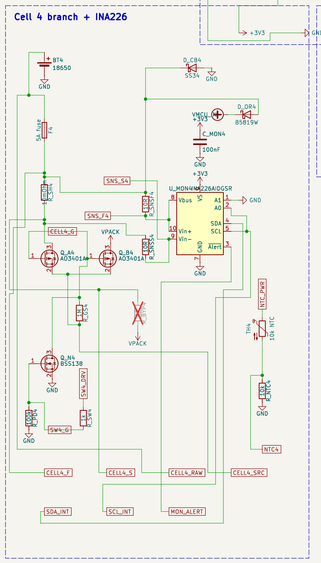

Mounting holes and power flags

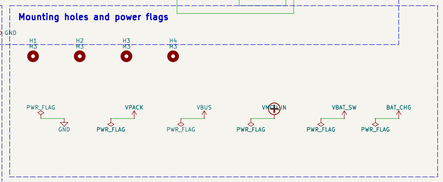

Sheet: /	
File: pack_tme.kicad_sch	
Title:	
Size: A1	Date:
KiCad E.D.A. 9.0.8	Rev: Id: 1/1