




LiPo input: fuse, reverse FET, TVS

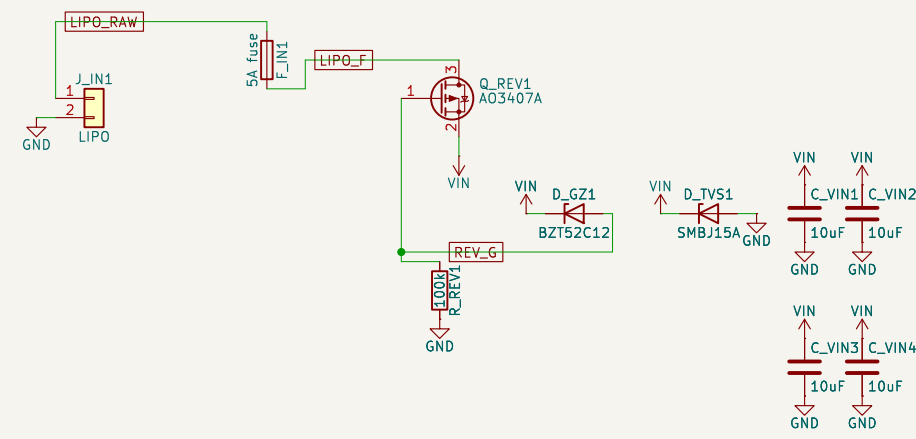


Key enable, MCU kill, J_PWR1

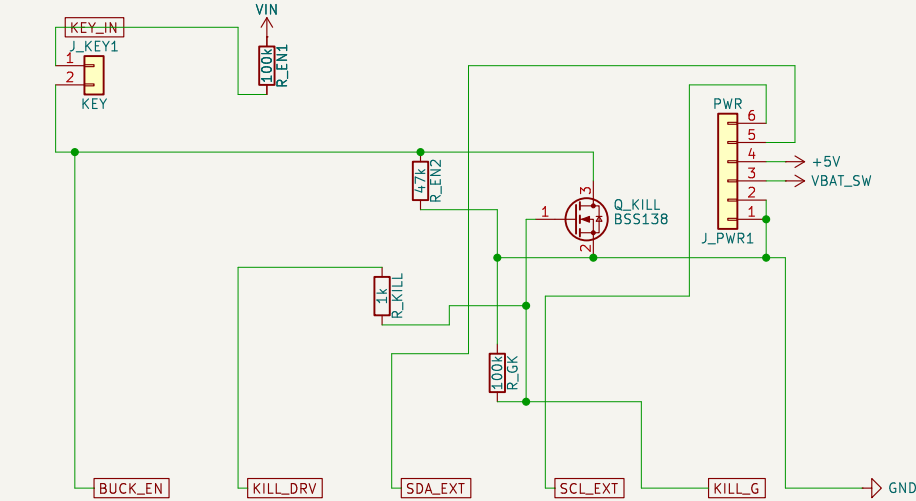


Buck A 4.10 V (VBAT_SW), buck B 5.07 V (+5V)

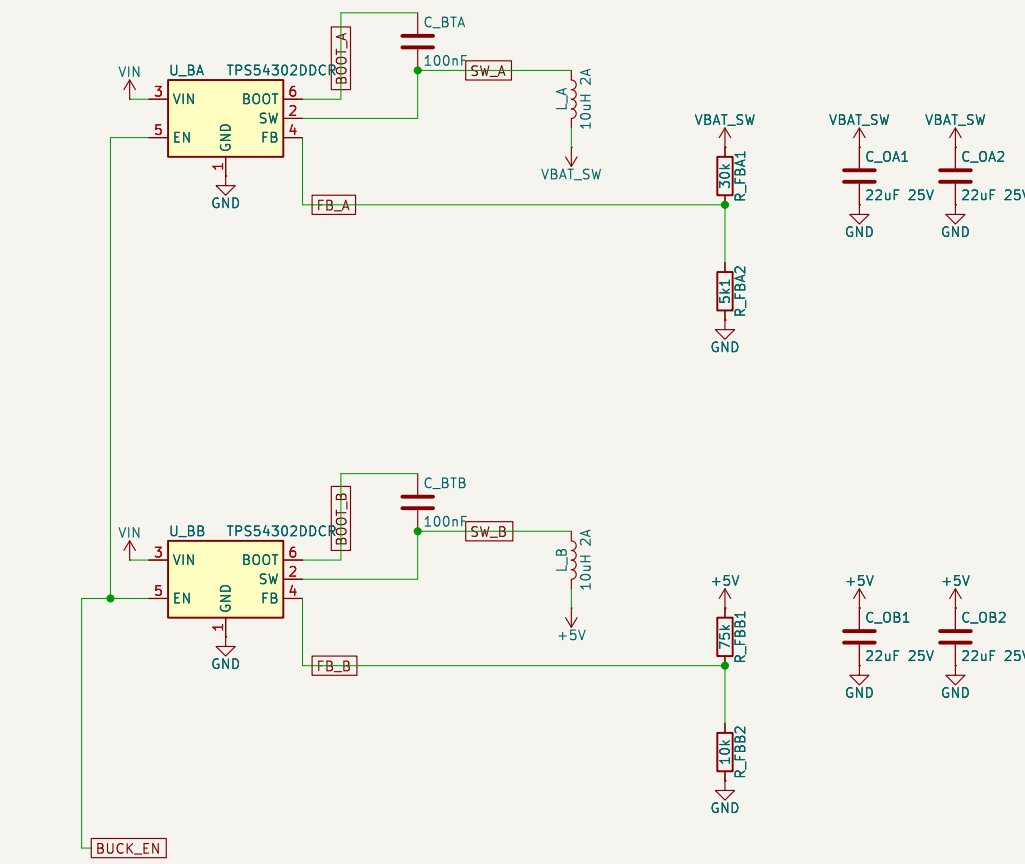

Balance lead dividers

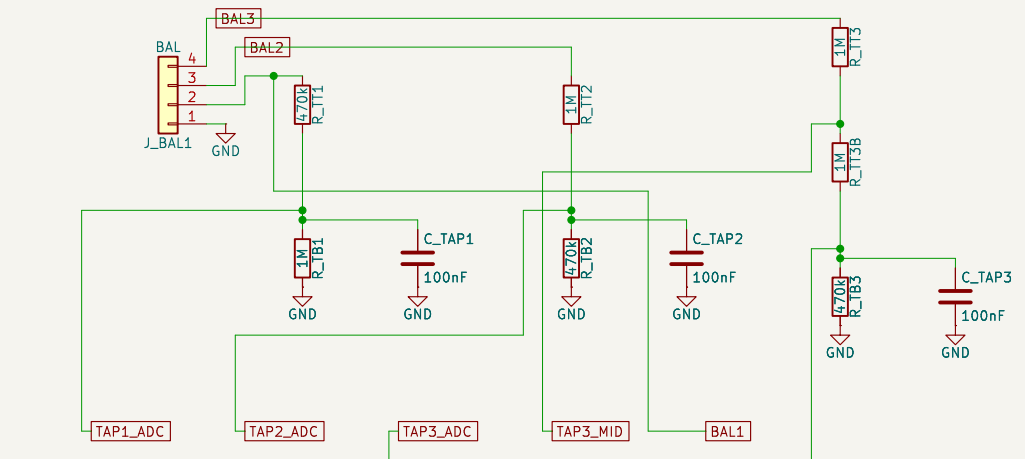

Always-on 3V3, STM32C071, SWD pads

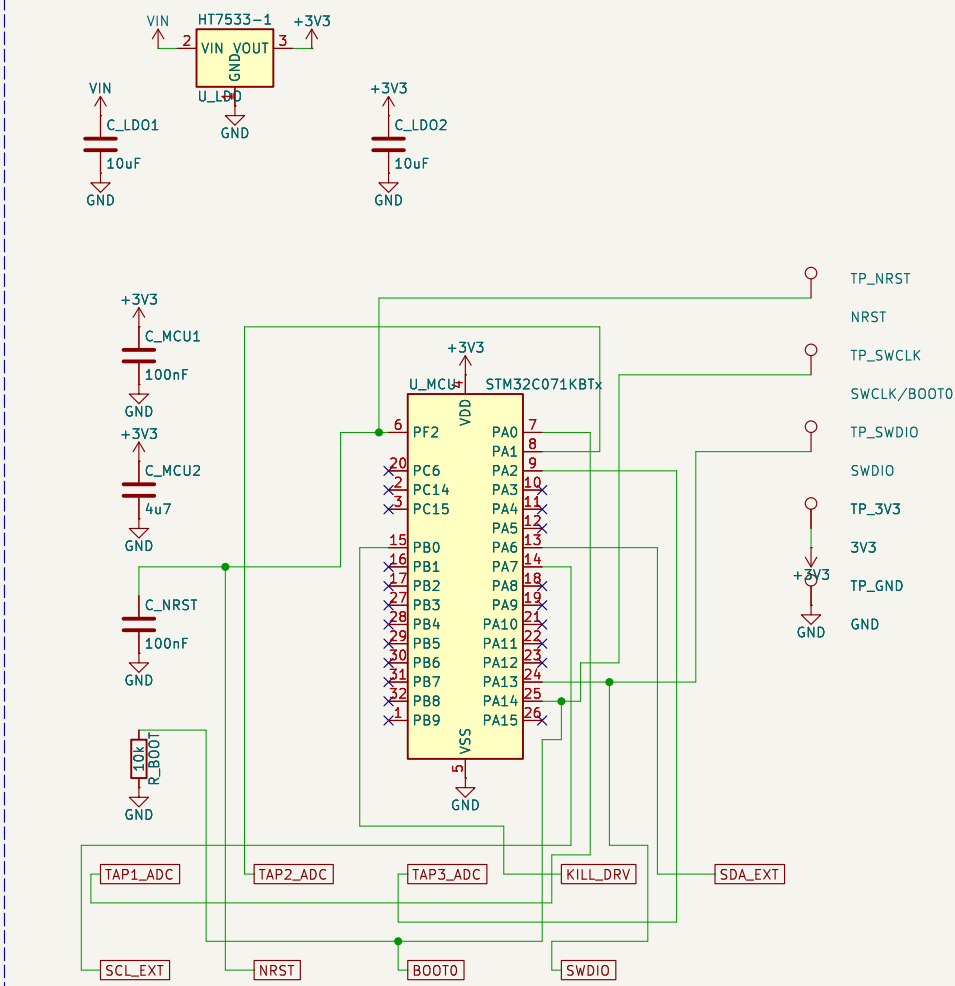

Mounting holes and power flags

