




Power in (from pack board)

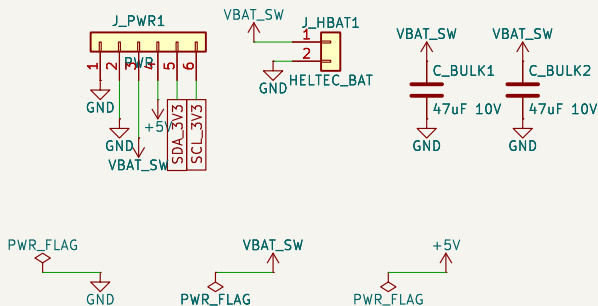


I2C level shifter, LCD (5 V), NFC (3.3 V)

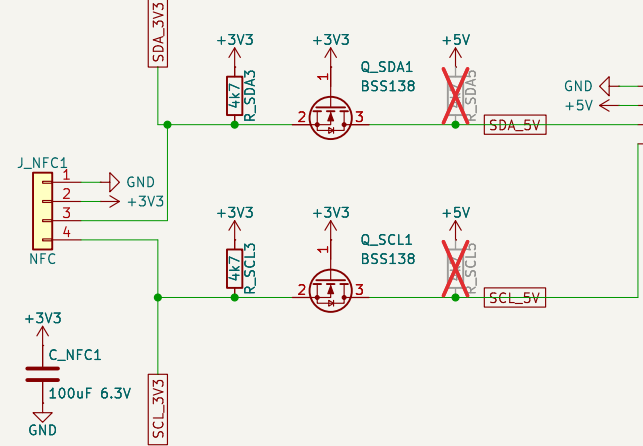

GPIO expander (0x20), button inputs

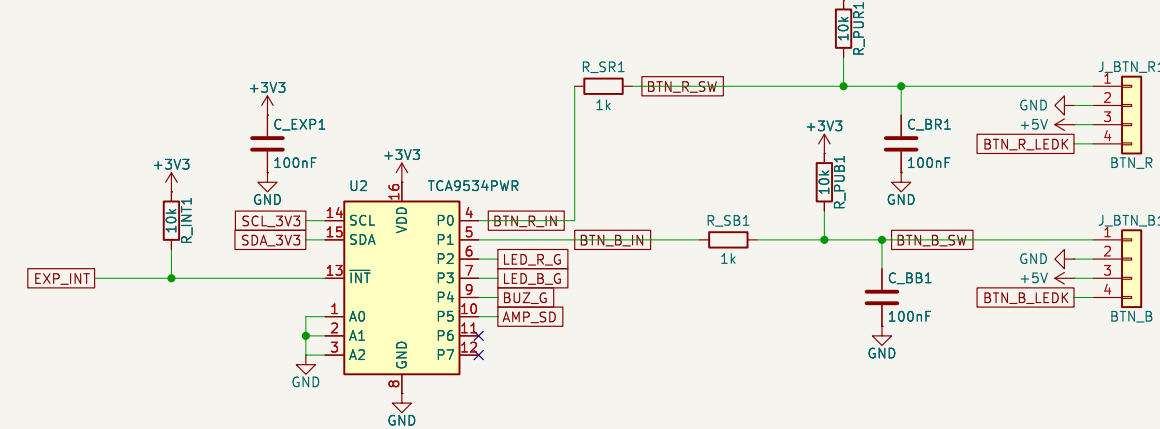


Low-side drivers: button LEDs, buzzer

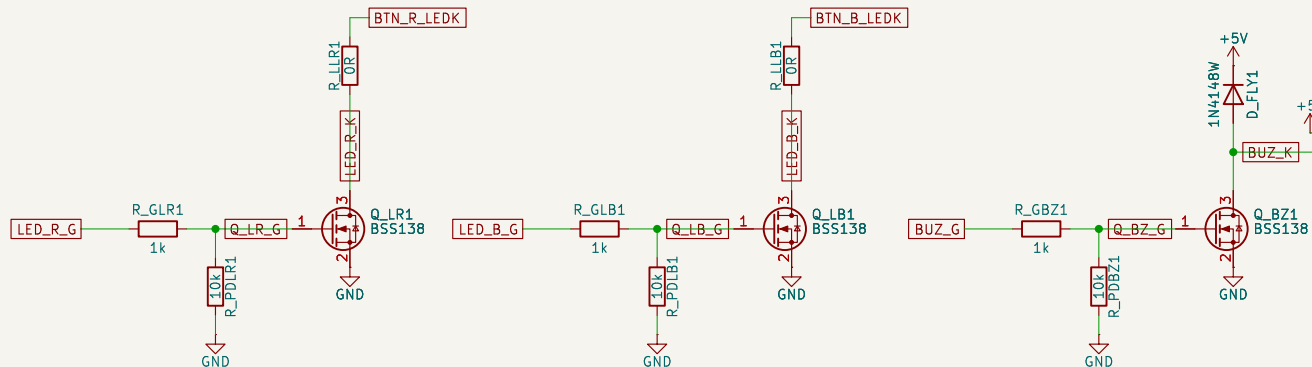

Mounting holes



Heltec V4 headers

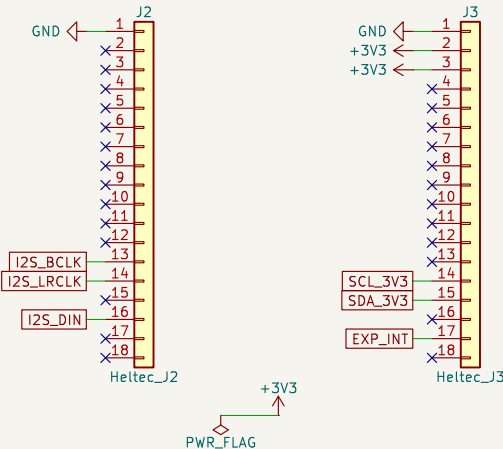

I2S DAC and speaker amp

