


Power in (from pack board)

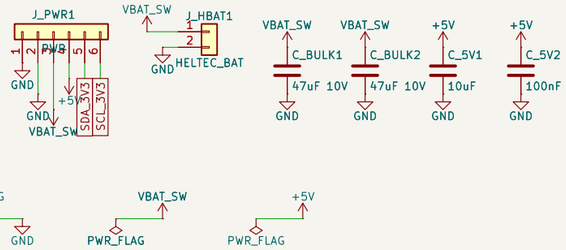


I2S speaker amp

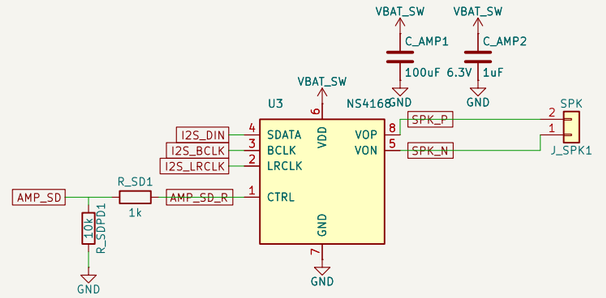


Heltec V4 headers

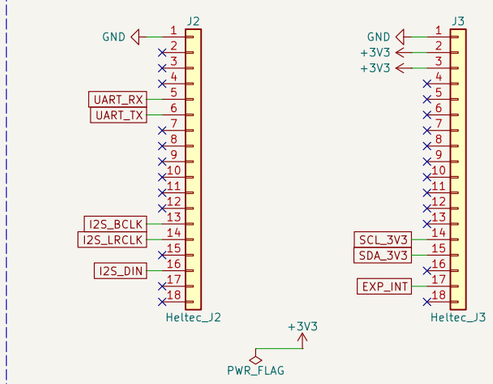


I2C level shifter, LCD (5 V), NFC (3.3 V)

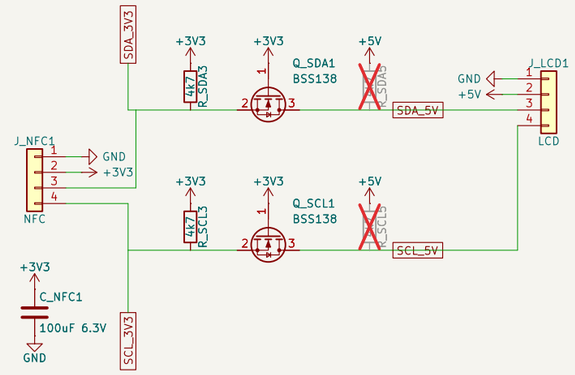

GPIO expander (0x20), button inputs

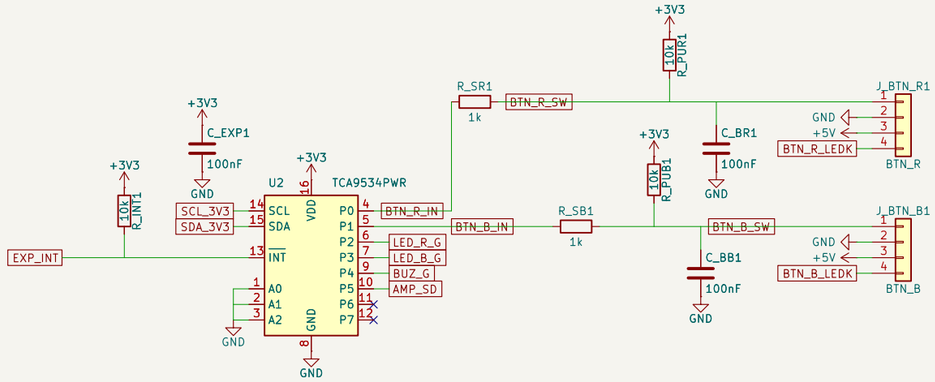


Low-side drivers: button LEDs, buzzer

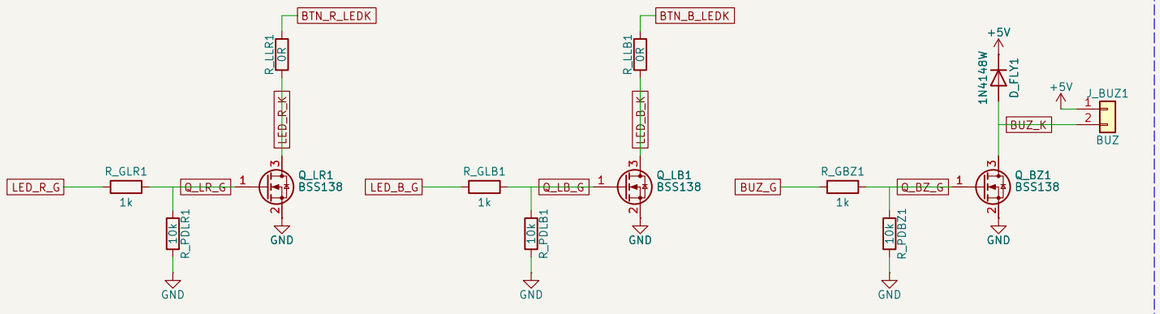

Mounting holes



Debug: UART, I2C, test pads

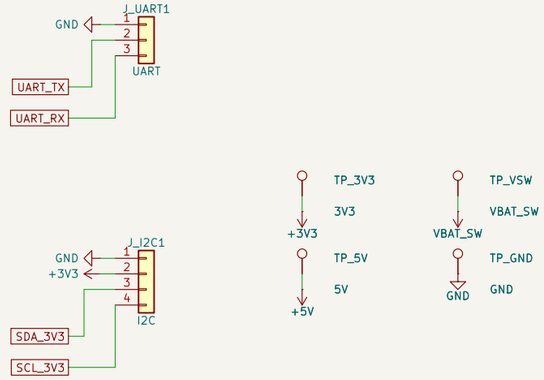

Sheet: /		
File: carrier.kicad_sch		
Title: AirsoftCounter v2 carrier		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/1