


LiPo input: fuse, reverse FET, TVS

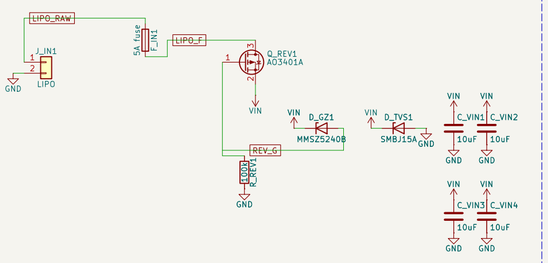


Buck A 4.10 V (VBAT_SW), buck B 5.07 V (+5V)

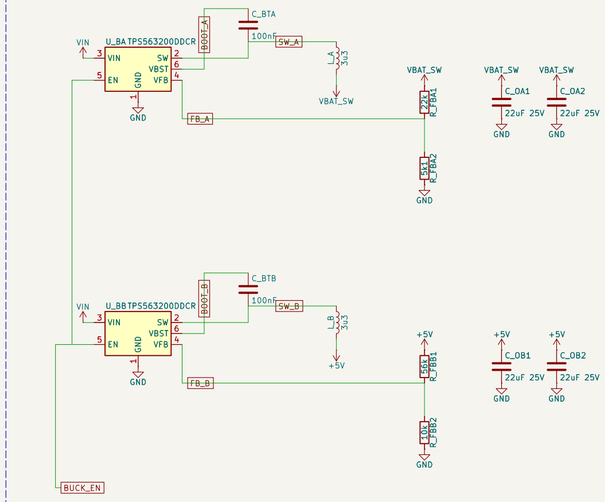


Always-on 3V3, STM32L072, SWD pads

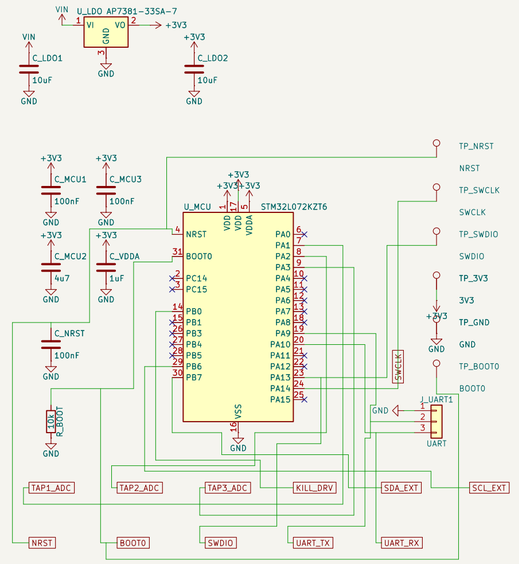


Key enable, MCU kill, J_PWR1

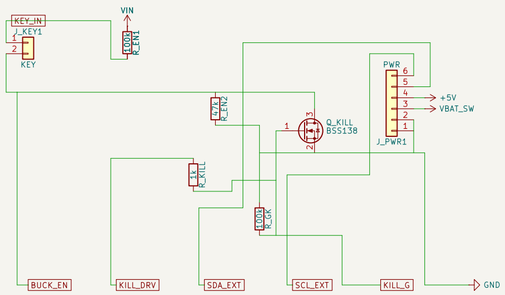

Balance lead dividers

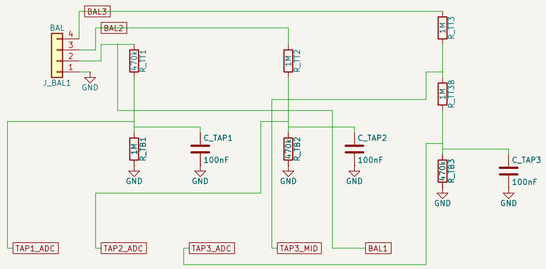

Mounting holes and power flags

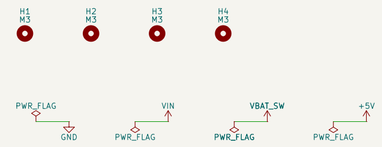

Sheet: /	
File: lipo_tme.kicad_sch	
Title: AirsoftCounter v2 LiPo (hand-build)	
Size: A2	Date:
KiCad E.D.A. 10.0.7	Rev: Id: 1/1