


USB-C input, BQ25601 charger

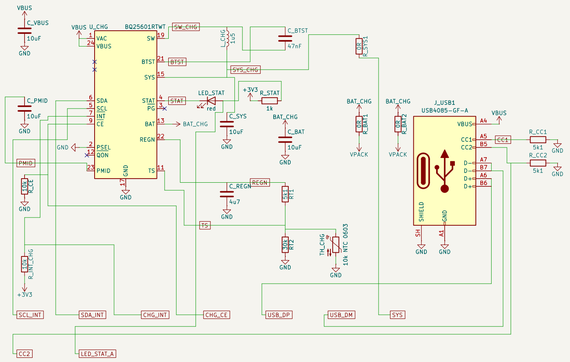

Diode-OR and 3V3 LDO



STM32L072 MCU, reset/boot, test pads

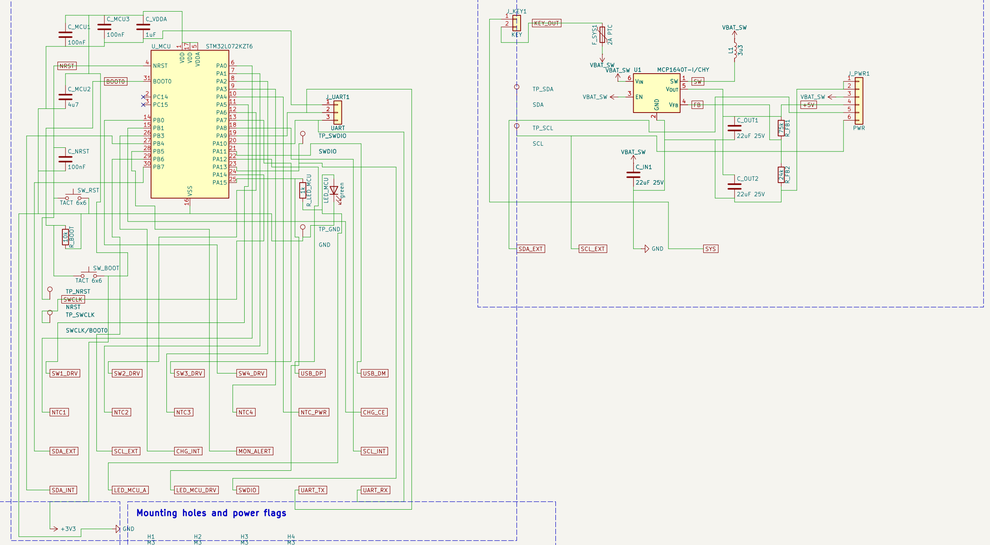

Key switch, 2 A PTC, 5 V boost, J_PWR1

Cell 1 branch + INA226

Cell 2 branch + INA226

Cell 3 branch + INA226

Cell 4 branch + INA226

Mounting holes and power flags