

CE394M Advanced Analysis in Geotechnical Engineering: Introduction

Krishna Kumar

University of Texas at Austin

krishnak@utexas.edu

January 21, 2019

1 Geotechnical modeling

- Complexity in Geotechnical modeling
- Classical vs advanced analysis

2 Numerical methods for differential equations

- Direct method: Matrix analysis of structures
- Numerical analysis of engineering problems

3 Governing equations in stress-deformation analysis

- Stress equilibrium
- Compatibility condition
- Stress-strain relationship

Geotechnical modeling of the complex world



Fig. London Bridge Station, London, UK

CE394M: Intro to geotech analysis

└ Geotechnical modeling

└ Complexity in Geotechnical modeling

└ Geotechnical modeling of the complex world



Movements must be estimated, both of the structure and of the ground. This is particularly important if there are adjacent buildings and for sensitive services. For example, if an excavation is to be made in an urban area close to existing services and buildings, one of the key design constraints is the effect that the excavation has on the adjacent structures and services. It may be necessary to predict any structural forces induced in these existing structures and/or services.

Geotechnical modeling of the complex world


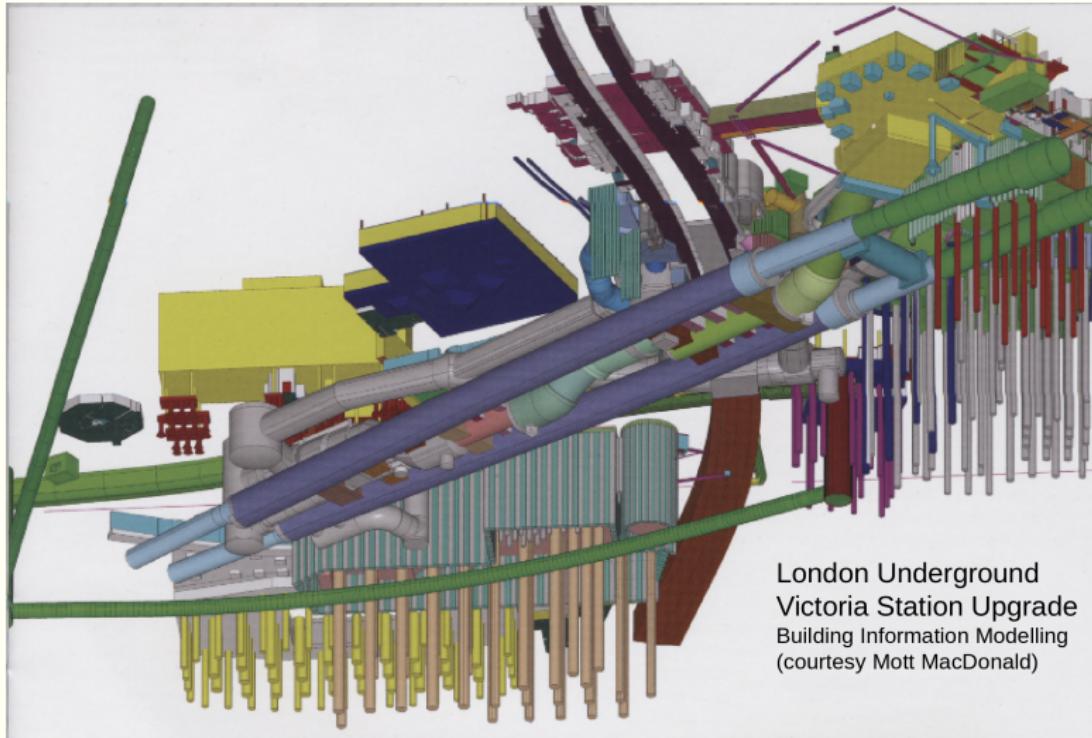


Fig. London Victoria station upgrade, London, UK

Geotechnical modeling

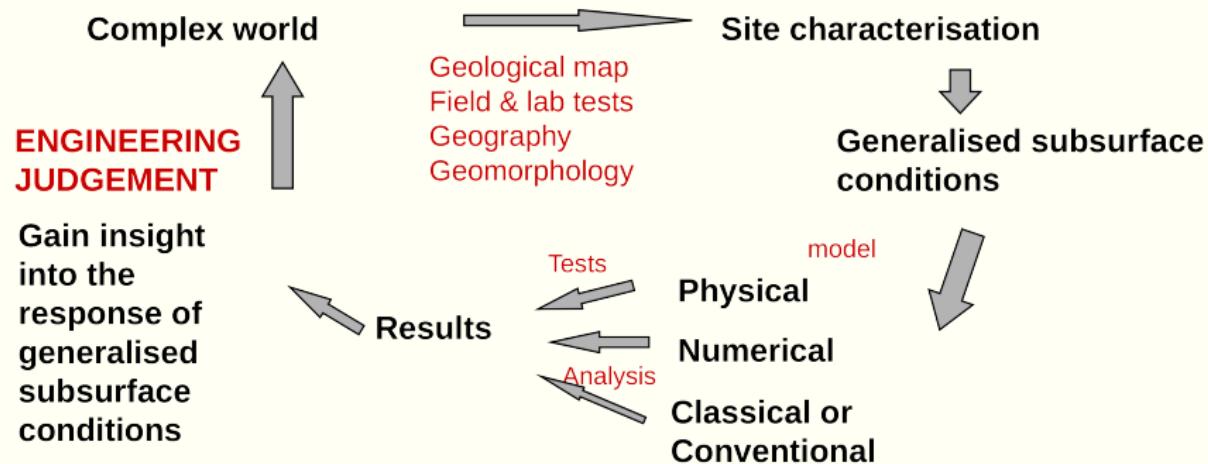


CE394M: Intro to geotech analysis

└ Geotechnical modeling

└ Complexity in Geotechnical modeling

└ Geotechnical modeling



Design requirements: Before the design process can begin, a considerable amount of information must be assembled. The basic geometry and loading conditions must be established. These are usually defined by the nature of the engineering project.


A geotechnical site investigation is then required to establish the ground conditions. Both the soil stratigraphy and soil properties should be determined. In this respect it will be necessary to determine the strength of the soil and, if ground movements are important, to evaluate its stiffness too. The position of the ground water table and whether or not there is underdrainage or artesian conditions must also be established. The possibility of any changes to these water conditions should be investigated. For example, in many major cities around the world the ground water level is rising.

CE394M: Intro to geotech analysis

└ Geotechnical modeling

└ Complexity in Geotechnical modeling

└ Geotechnical modeling



The site investigation should also establish the location of any services (gas, water, electricity, telecommunications, sewers and/or tunnels) that are in the vicinity of the proposed construction. The type (strip, raft and/or piled) and depth of the foundations of any adjacent buildings should also be determined. The allowable movements of these services and foundations should then be established.


Any restrictions on the performance of the new geotechnical structure must be identified. Such restrictions can take many different forms. For example, due to the close proximity of adjacent services and structures there may be restrictions imposed on ground movements.

CE394M: Intro to geotech analysis

└ Geotechnical modeling

└ Complexity in Geotechnical modeling


└ Geotechnical modeling




Once the above information has been collected, the design constraints on the geotechnical structure can be established. These should cover the construction period and the design life of the structure. This process also implicitly identifies which types of structure are and are not appropriate. For example, when designing an excavation, if there is a restriction on the movement of the retained ground, propped or anchored embedded retaining walls are likely to be more appropriate than gravity or reinforced earth walls. The design constraints also determine the type of design analysis that needs to be undertaken.

Geotechnical modeling: What should be modeled?

- Self weight effect of soils (This is why soil moves)
- Construction sequence (Complex geometry)
- Water movement (undrained, consolidation, drained)
- Insitu stresses (stiffness/strength depends on current stresses and stress history)
- Predict the ability of a design to withstand extreme loading conditions (you only have one chance)

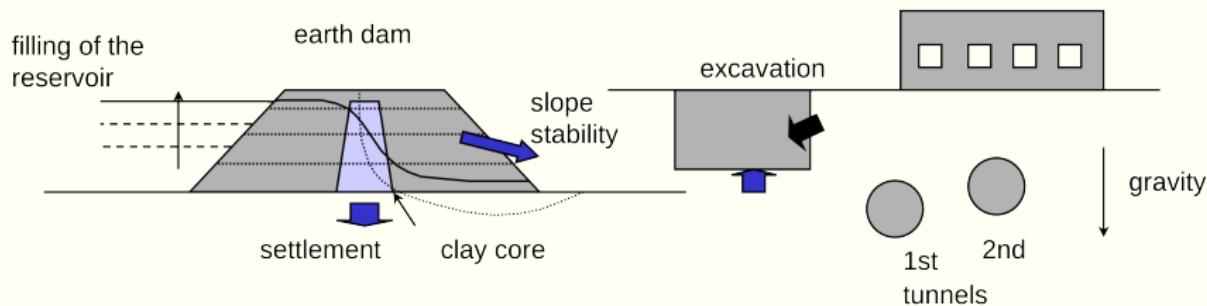


Scales of modeling in geotechnical engineering

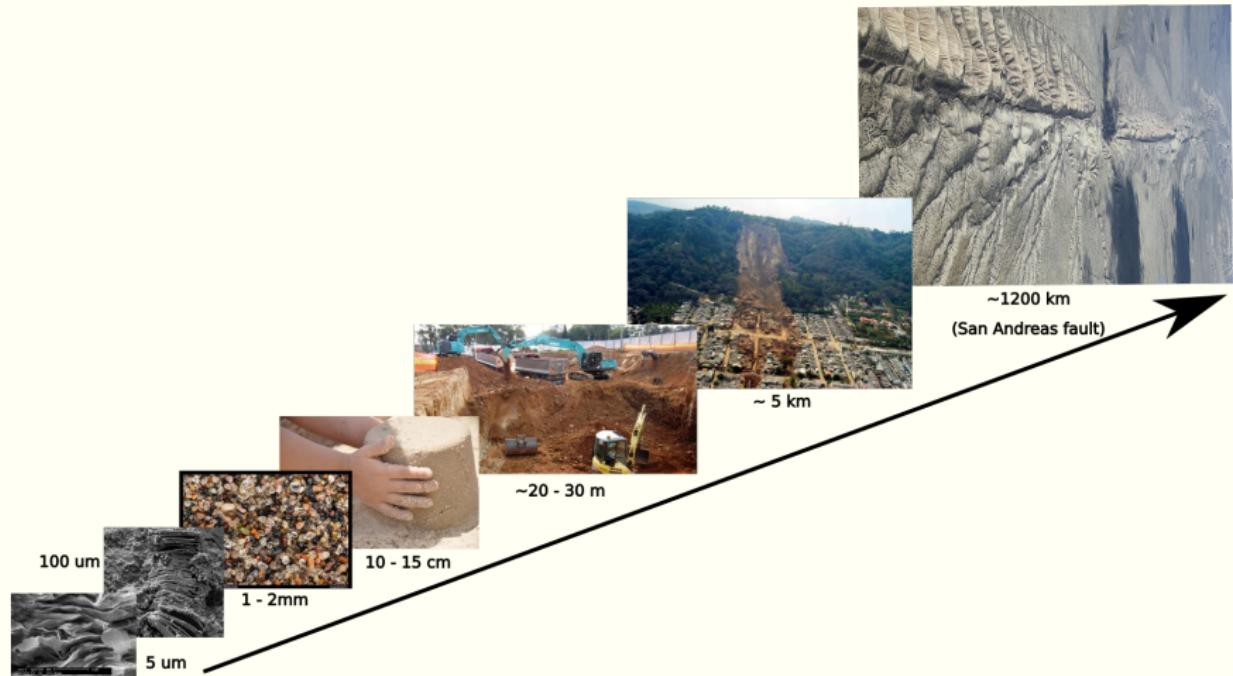

- nonhomogeneous,
- anisotropic,
- non-linear,
- initial stress conditions,
- stress history
- Geometry - very complex


Soil Mechanics in practice - largely empirical

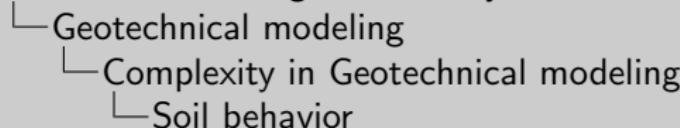


- ◆ nonhomogeneous,
- ◆ anisotropic,
- ◆ non-linear,
- ◆ initial stress conditions,
- ◆ stress history
- ◆ Geometry - very complex

Soil Mechanics in practice - largely empirical

When designing any geotechnical structure, the engineer must ensure that it is stable. Stability can take several forms. Firstly, the structure and support system must be stable as a whole. There must be no danger of rotational, vertical or translational failure (**local stability**). Secondly, **overall stability** must be established. For example, if a retaining structure supports sloping ground, the possibility of the construction promoting an overall slope failure should be investigated.

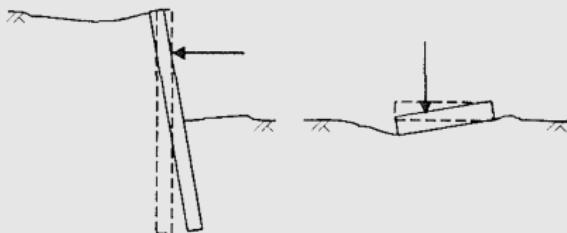

Local stability

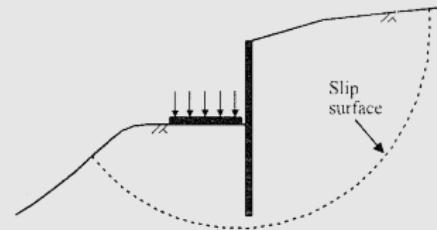

Overall stability

Advanced analysis in geotechnical engineering

Geotechnical design:

- Assess applied forces
- evaluate “performance” (stability & movements) under working and ultimate loads

Analysis:

- Mathematical framework to perform calculations for these quantities
- Requires idealization of: geometry, soil properties, and loading conditions
- Analysis is a tool in design, but design involves more: acceptable movements, constraints, site characterization, etc.

CE394M: Intro to geotech analysis

└ Geotechnical modeling

└ Complexity in Geotechnical modeling

└ Advanced analysis in geotechnical engineering

Geotechnical design:

- Assess applied forces
- evaluate "performance" (stability & movements) under working and ultimate loads.

Analysis:

- Mathematical framework to perform calculations for these quantities
- Requires idealization of: geometry, soil properties, and loading conditions
- Analysis is a tool in design, but design involves more: acceptable movements, constraints, site characterization, etc.

As part of the design process, it is necessary for an engineer to perform calculations to provide estimates of the above quantities. Analysis provides the mathematical framework for such calculations. A good analysis, which simulates real behaviour, allows the engineer to understand problems better. While an important part of the design process, analysis only provides the engineer with a tool to quantify effects once material properties and loading conditions have been set. The design process involves considerably more than analysis.

Classical vs advanced analysis


Classical approach:

- Failure estimates
 - rigid perfectly-plastic stress-strain assumptions
 - calculate factor of safety (What value do you pick?)
- Deformation estimates
 - Elastic analysis
 - Use average elastic properties (like what??)

Advanced analysis:

- Failure and deformation are obtained from the same analysis
- Handle complex geometry
- More difficult to perform, more computational requirements and more info on soil behavior $\sigma - \epsilon$
- Need to know how to do it right!

Matrix analysis of structures

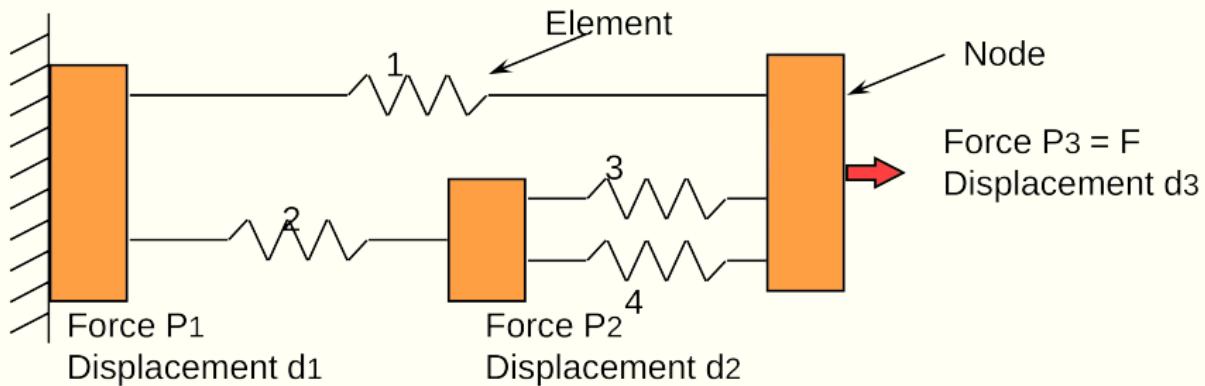

- What are the known variables? $d_1 = 0, P_2 = 0, P_3 = F(\text{constant})$
- What are the unknowns? P_1, d_2, d_3
- What do we know? Force or distortion relations at an element level.

Matrix analysis of structures: Equilibrium

A structure is considered to be in equilibrium if, initially at rest, it remains at rest when subjected to a system of forces and couples. If a structure is in equilibrium, then all of its members and joints must also be in equilibrium.

- $P_1 = -S_1 - S_2$
- What are the unknowns? P_1, d_2, d_3
- What do we know? Force or distortion relations at an element level.

$$\begin{bmatrix} P_1 \\ P_2 \\ P_3 \end{bmatrix} = \begin{bmatrix} -1 & -1 & 0 & 0 \\ 0 & 1 & -1 & -1 \\ 1 & 0 & 1 & 1 \end{bmatrix} + \begin{bmatrix} S_1 \\ S_2 \\ S_3 \\ S_4 \end{bmatrix}$$

$$\mathbf{P} = \mathbf{A}^T \mathbf{S}$$

Matrix analysis of structures: Compatibility

- compatibility relates the deformations of a structure so that its various parts (members, joints, and supports) fit together without any gaps or overlaps.
- ensure that the deformed shape of the structure is continuous (except at the locations of any internal hinges or rollers), and is consistent with the support conditions.

Matrix analysis of structures: Compatibility

v = internal spring distortion δ = nodal displacement

- $v_1 = d_3 - d_1$
- $v_2 = d_2 - d_1$
- $v_3 = d_3 - d_2$
- $v_4 = d_3 - d_2$

$$\begin{bmatrix} v_1 \\ v_2 \\ v_3 \\ v_4 \end{bmatrix} = \begin{bmatrix} -1 & 0 & 1 \\ -1 & 1 & 0 \\ 0 & -1 & 1 \\ 0 & -1 & 1 \end{bmatrix} + \begin{bmatrix} d_1 \\ d_2 \\ d_3 \end{bmatrix}$$

$$\mathbf{v} = \mathbf{Ad}$$

Matrix analysis of structures: Physical condition

Force-distance relationship: spring constant

spring #	1	2	3	4
stiffness ($F.L^{-1}$)	3	2	1	2

$$\begin{bmatrix} S_1 \\ S_2 \\ S_3 \\ S_4 \end{bmatrix} = \begin{bmatrix} 3 & 0 & 0 & 0 \\ 0 & 2 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 2 \end{bmatrix} \begin{bmatrix} v_1 \\ v_2 \\ v_3 \\ v_4 \end{bmatrix}$$

$$\mathbf{s} = \mathbf{Dv}$$

Matrix analysis of structures: Direct Method


Combine all the equations: $\mathbf{P} = \mathbf{A}^T \mathbf{S} = \mathbf{A}^T \mathbf{D} \mathbf{v} = \mathbf{A}^T \mathbf{D} \mathbf{A} \mathbf{d} = \mathbf{K} \mathbf{d}$
where $\mathbf{K} = \mathbf{A}^T \mathbf{D} \mathbf{A}$ (Global stiffness matrix)

$$\begin{aligned}\mathbf{K} &= \begin{bmatrix} -1 & -1 & 0 & 0 \\ 0 & 1 & -1 & -1 \\ 1 & 0 & 1 & 1 \end{bmatrix} \begin{bmatrix} 3 & 0 & 0 & 0 \\ 0 & 2 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 2 \end{bmatrix} \begin{bmatrix} -1 & 0 & 1 \\ -1 & 1 & 0 \\ 0 & -1 & 1 \\ 0 & -1 & 1 \end{bmatrix} \\ &= \begin{bmatrix} 5 & -2 & -3 \\ -2 & 5 & -3 \\ -3 & -3 & 6 \end{bmatrix}\end{aligned}$$

$$\begin{bmatrix} P_1 \\ P_2 \\ P_3 \end{bmatrix} = \begin{bmatrix} 5 & -2 & -3 \\ -2 & 5 & -3 \\ -3 & -3 & 6 \end{bmatrix} \begin{bmatrix} d_1 \\ d_2 \\ d_3 \end{bmatrix}$$


Apply Boundary conditions $d_1 = 0$, $P_2 = 0$ and $P_3 = F$ and solve P_1 , d_2 and d_3

Matrix analysis of structures

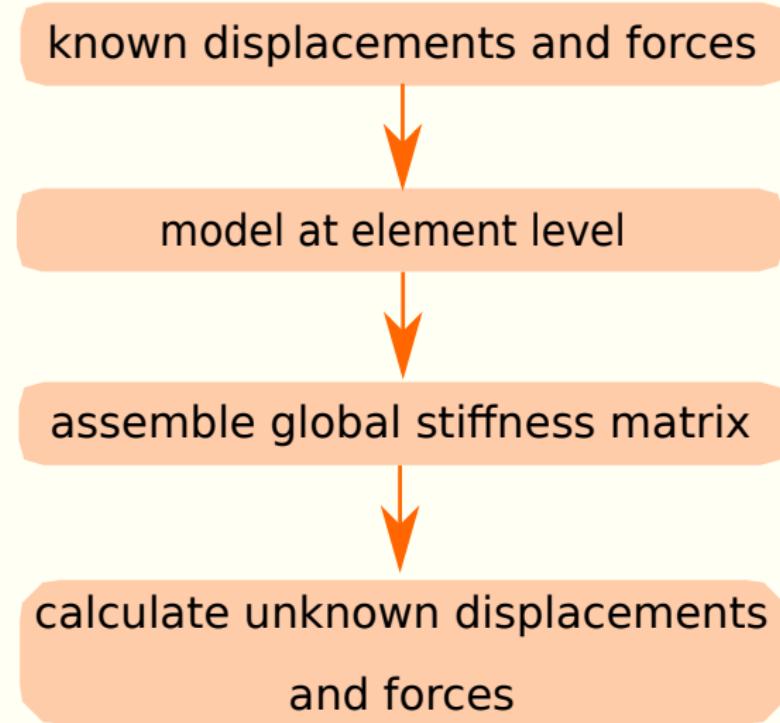

Numerical analysis of engineering problems

- Conceptualize the system
 - Geometry
 - Properties
 - Processes
- Describe it mathematically
 - Select the relevant differential equations
- Solve the equations (numerically)
 - Discretize the system
 - Settle for approximations (numerical techniques)
- Interpret the results

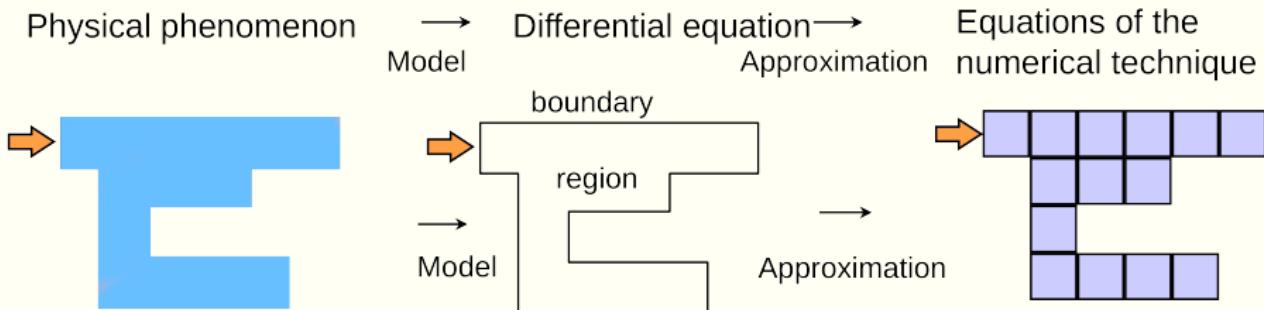

Boundary value problems

Differential equations coupled with boundary conditions

- Steady state (time-independent)
 - Static load-deformation problems: $\partial\sigma/\partial x = 0$ (force + disp. B.C)
 - Steady seepage state, flow problems: $\partial q/\partial x = 0$ (head + flow B.C)
- Transient (time-dependent)
 - Consolidation/pore-fluid migration/multiphase flows
 - Dynamic loading (earthquakes, wave actions)
 - Contaminant transport processes

Numerical solutions to differential equations

- Finite differences: Approximate derivatives with expansion into a Taylor series
- Finite elements
- Boundary element method (BEM)
- Meshless methods
- Discrete/discontinuous element methods
- Others...

Governing equations in stress-deformation analysis

In stress-deformation analysis, we need to consider:

- **Equilibrium - static conditions**

- forces and stress must agree across the region of interest. (geometric problem)

- **Compatibility-kinematic conditions**

- geometry, displacement and strains must agree across the region of interest. (geometric problem)


- **Stress-strain relationship on physical conditions**

- material dependent relationship between stress and strain must be specified. (element level)

Governing equations in stress-deformation analysis

The governing differential equation for equilibrium expresses: $\sum \mathbf{F} = ma$

- σ_{xx} acting on face dy in the $-x$ direction
- τ_{xy} acting on face dx in the $-x$ direction
- $\sigma_{xx} + \frac{\partial \sigma_{xx}}{\partial x} dx$ acting on face dy in the $+x$ direction
- $\tau_{xy} + \frac{\partial \tau_{xy}}{\partial y} dy$ acting on face dx in the $+x$ direction
- Plus “body forces” due to gravity: $\rho f_x dx dy$ where f_x is body force per unit mass

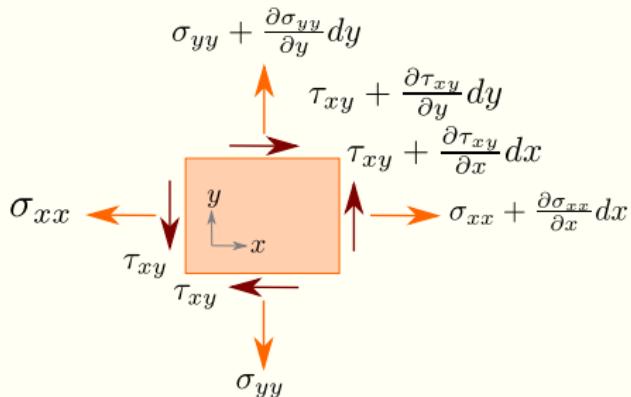

Equilibrium equations

Summing all this in the x-direction gives:

$$-\sigma_{xx}dy - \tau_{xy}dx + \left(\sigma_{xx} + \frac{\partial\sigma_{xx}}{\partial x}dx \right) dy + \left(\tau_{xy} + \frac{\partial\tau_{xy}}{\partial y}dy \right) dx + \rho f_x dxdy = \rho dxdy a_x$$


Cleaning up terms that cancel, and dividing through by $dxdy$ gives

$$\frac{\partial\sigma_{xx}}{\partial x} + \frac{\partial\tau_{xy}}{\partial y} + \rho f_x = \rho a_x$$

And summing forces in the y-direction leads to:

$$\frac{\partial\sigma_{yy}}{\partial y} + \frac{\partial\tau_{xy}}{\partial x} + \rho f_y = \rho a_y$$

Equilibrium in 3D

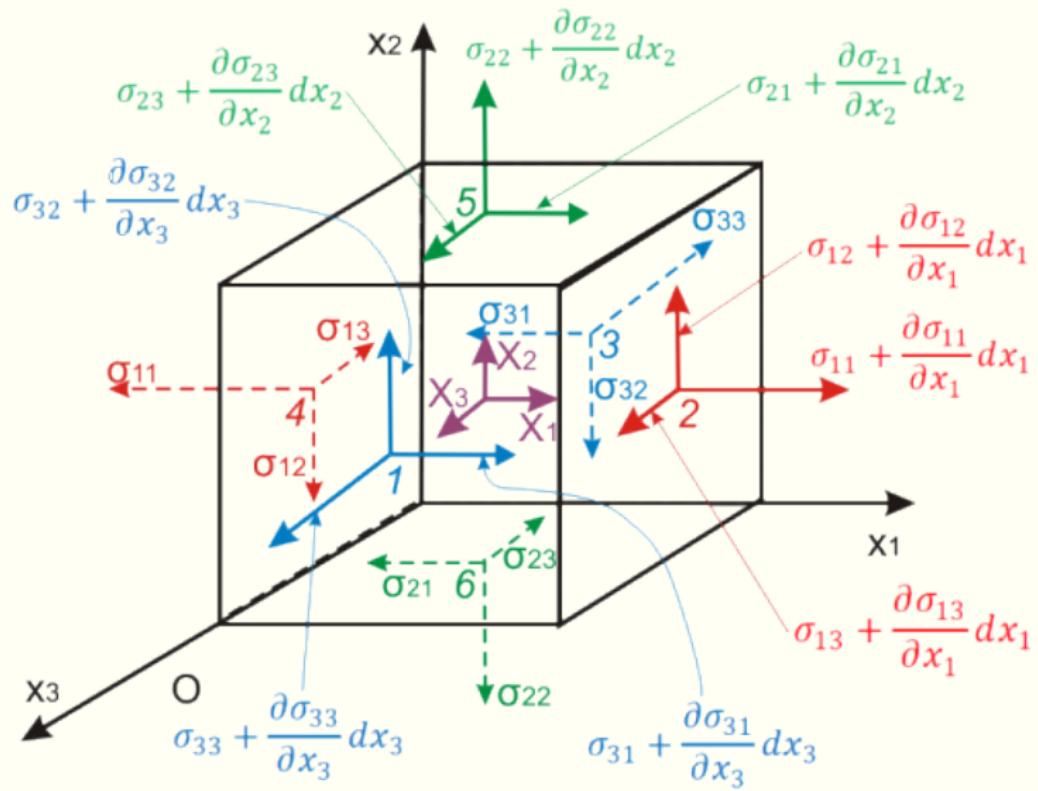

Equilibrium in 3D

$$\frac{\partial \sigma_{xx}}{\partial x} + \frac{\partial \sigma_{xy}}{\partial y} + \frac{\partial \sigma_{xz}}{\partial z} + \rho f_x = \rho a_x$$

$$\frac{\partial \sigma_{yx}}{\partial x} + \frac{\partial \sigma_{yy}}{\partial y} + \frac{\partial \sigma_{yz}}{\partial z} + \rho f_y = \rho a_y$$

$$\frac{\partial \sigma_{zx}}{\partial x} + \frac{\partial \sigma_{zy}}{\partial y} + \frac{\partial \sigma_{zz}}{\partial z} + \rho f_z = \rho a_z$$

The governing differential equation for equilibrium expresses $\sum \mathbf{F} = m\mathbf{a}$ in terms of derivatives of the stress tensor as: $\nabla \boldsymbol{\sigma} + \rho \mathbf{f} = \rho \mathbf{a}$

$\boldsymbol{\sigma}$ is the stress tensor,
 ρ is density,
 \mathbf{f} is the body force vector per unit mass and
 \mathbf{a} is the acceleration vector.

Stress equilibrium

If the object is in equilibrium, then $\mathbf{a} = 0$ and $\sum \mathbf{F} = 0$.

$$\frac{\partial \sigma_{xx}}{\partial x} + \frac{\partial \sigma_{xy}}{\partial y} + \frac{\partial \sigma_{xz}}{\partial z} + b_x = 0$$

$$\frac{\partial \sigma_{yx}}{\partial x} + \frac{\partial \sigma_{yy}}{\partial y} + \frac{\partial \sigma_{yz}}{\partial z} + b_y = 0$$

$$\frac{\partial \sigma_{zx}}{\partial x} + \frac{\partial \sigma_{zy}}{\partial y} + \frac{\partial \sigma_{zz}}{\partial z} + b_z = 0$$


Stresses in Voigt notation: $[\sigma_{xx}, \sigma_{yy}, \sigma_{zz}, \sigma_{xy}, \sigma_{xz}, \sigma_{yz}]^T$.

Equilibrium equation: $\nabla^T \boldsymbol{\sigma} + \mathbf{b} = 0$


Then:

$$\nabla^T = \begin{bmatrix} \frac{\partial}{\partial x} & 0 & 0 & \frac{\partial}{\partial y} & 0 & \frac{\partial}{\partial z} \\ 0 & \frac{\partial}{\partial y} & 0 & \frac{\partial}{\partial x} & \frac{\partial}{\partial z} & 0 \\ 0 & 0 & \frac{\partial}{\partial z} & 0 & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \end{bmatrix}$$


Governing equations: Compatibility

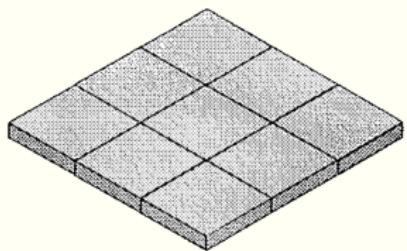

(a) original

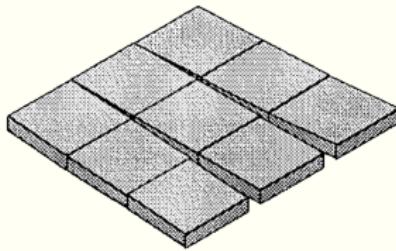

(b) non-compatible

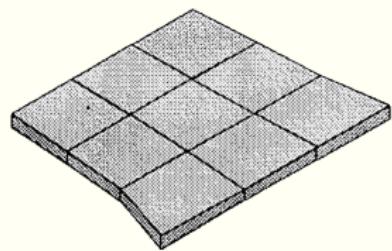

(c) compatible

Governing equations: Displacement - strain relationship

Displacement - strain relationship: $\varepsilon = \nabla \mathbf{u}$

Where,

$$\varepsilon_{xx} = \frac{\partial u_x}{\partial x}$$


$$\varepsilon_{yy} = \frac{\partial u_y}{\partial y}$$

$$\varepsilon_{zz} = \frac{\partial u_z}{\partial z}$$

$$\gamma_{xy} = \frac{\partial u_x}{\partial y} + \frac{\partial u_y}{\partial x}$$

$$\gamma_{yz} = \frac{\partial u_y}{\partial z} + \frac{\partial u_z}{\partial y}$$

$$\gamma_{zx} = \frac{\partial u_z}{\partial x} + \frac{\partial u_x}{\partial z}$$

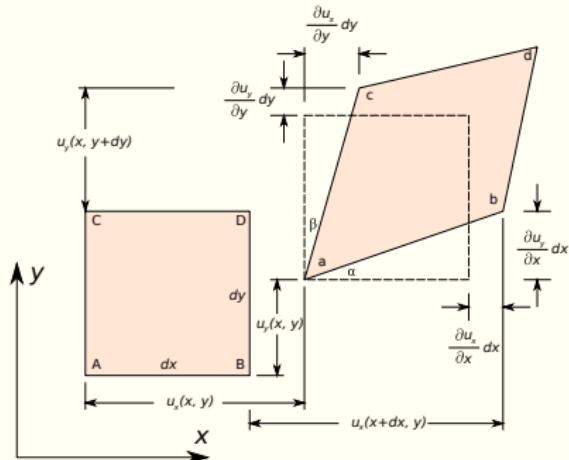

$$\varepsilon_{xy} = \frac{\gamma_{xy}}{2} = \frac{1}{2} \left(\frac{\partial u_x}{\partial y} + \frac{\partial u_y}{\partial x} \right)$$

Equilibrium and compatibility conditions

Combining the Equilibrium and Compatibility conditions gives:

- Unknowns: 6 stresses + 6 strains + 3 displacements = 15
- Equations: 3 equilibrium + 6 compatibility = 9

To obtain a solution therefore requires 6 more equations. These come from the constitutive relationships

Governing equations: Stress-strain relationship

Stress - strain relationship: $\sigma = \mathbf{D}\epsilon$

$$\begin{bmatrix} \sigma_{xx} \\ \sigma_{yy} \\ \sigma_{zz} \\ \sigma_{xy} \\ \sigma_{yz} \\ \sigma_{zx} \end{bmatrix} = \begin{bmatrix} D_{xxxx} & D_{xxyy} & D_{xxzz} & D_{xxxz} & D_{xxyz} & D_{xxzx} \\ D_{yyxx} & D_{yyyy} & D_{yyzz} & D_{yyxy} & D_{yyyz} & D_{yyzx} \\ D_{zzxx} & D_{zzyy} & D_{zzzz} & D_{zzxy} & D_{zzyz} & D_{zzzx} \\ D_{xyxx} & D_{xyyy} & D_{xyzz} & D_{xyxy} & D_{xyyz} & D_{xyzx} \\ D_{yzxx} & D_{yzyy} & D_{yzzz} & D_{yzxy} & D_{yzyz} & D_{yzzx} \\ D_{zxxx} & D_{zxyy} & D_{zxzz} & D_{zxxy} & D_{zxyz} & D_{zxzx} \end{bmatrix} \begin{bmatrix} \epsilon_{xx} \\ \epsilon_{yy} \\ \epsilon_{zz} \\ \epsilon_{xy} \\ \epsilon_{yz} \\ \epsilon_{zx} \end{bmatrix}$$

Governing equations in stress-deformation analysis

What are the variables used in the governing equations?

- ① displacements \mathbf{u} in the body
- ② strains $\boldsymbol{\epsilon}$ in the body or within the elements
- ③ stresses $\boldsymbol{\sigma}$ in the body or within the elements

Advanced analysis involves:

- ① Equilibrium: External forces + internal stresses agree
- ② Compatibility: Displacements fields agree (no gaps) + strains (derivatives)
- ③ Stress-strain relationship (constitutive behaviour)