


A_MIN: closed NC loop -> ALLOW high; open/broken -> low

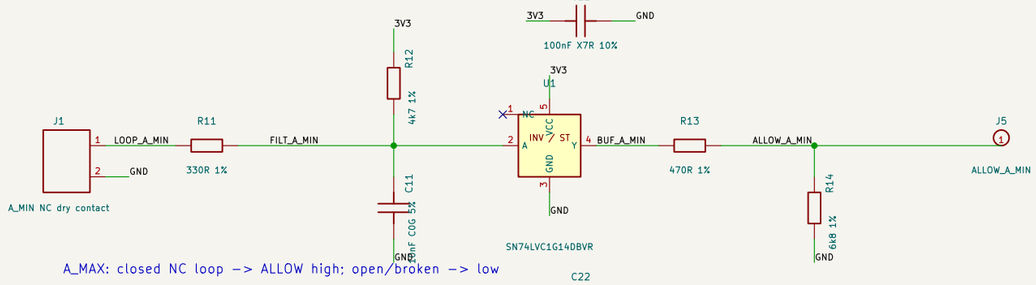


A_MAX: closed NC loop -> ALLOW high; open/broken -> low

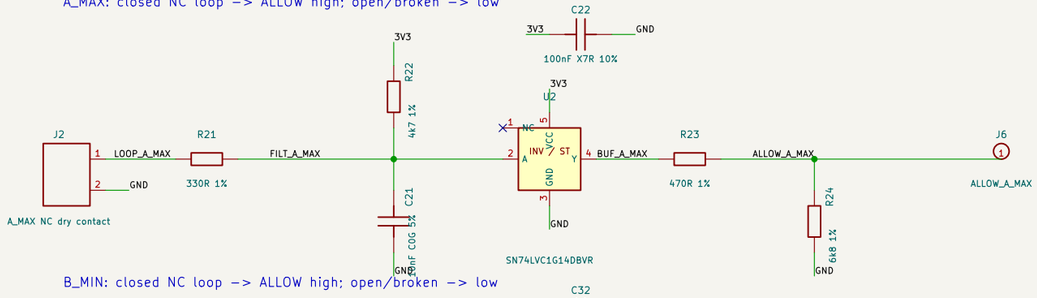


B_MIN: closed NC loop -> ALLOW high; open/broken -> low

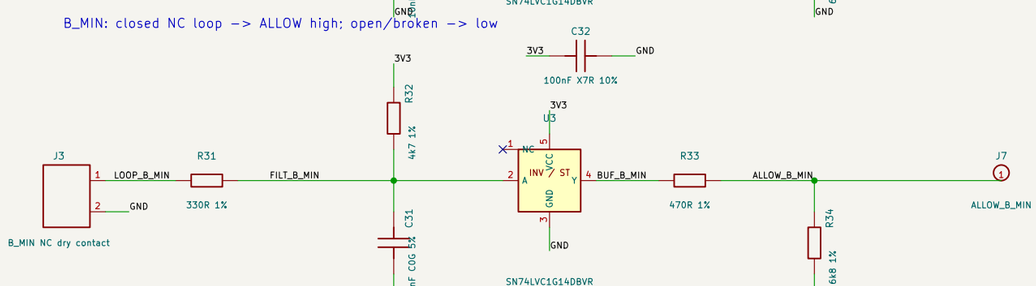

B_MAX: closed NC loop -> ALLOW high; open/broken -> low

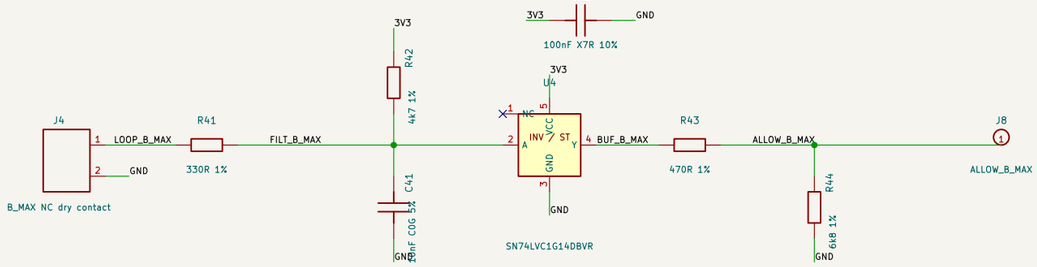







RESET pulls require soldered rework wires to existing driver nets.

3V3 and GND must share the host rail. No independent supply.

No 12/24V sensor signals. Dry contacts only.

Loop opening is not proof of physical arrival.

Limit handling is firmware-supervised, not a safety interlock.

Motor power motherboard stays upstream/unmodified.

CERN-OHL-S-2.0 | no physical validation | not for fabrication

kkybby | AI-assisted hardware

Sheet: /

File: limit4.kicad_sch

Title: LIMIT4 / dual-actuator extension

Size: A3	Date: 2026-09-19	**Rev: R0 DRAFT**
KiCad E.D.A. 10.0.6		Id: 1/1