
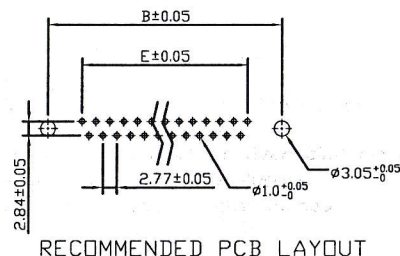


THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC, ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT

# REVISIONS

REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A			KING CHIU	2007-01-06
B			Xle	2014-08-01

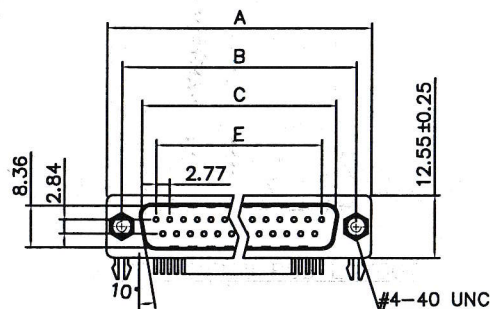

## Product Specification

### Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

Shell : Steel, 100u" Tin Over 50u" min Copper

Boardlock : Steel, Tin Plated.

Screwlock : Steel, Nickel Plated.

## Electrical

Contact Resistance : 20 milliohms max

Insulation Resistance : 1000




megohms at 500 VDC

Dielectric Withstanding Voltage :

1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Volatge Rating : 250 VAC/rms 60Hz

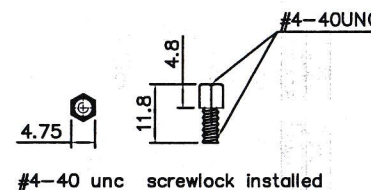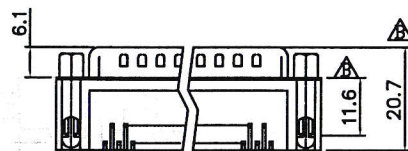

## 9.4mm Footprint

### Dimensions

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

### DIMENSIONS:

☐ MM [INCH] ☐ INCH [mm] ☒ MM ONLY  
 UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE:  
 DECIMALS ANGLES  
 .X ±0.38 [0.015] X° ±3°  
 .X ±0.25 [0.010] .X° ±1.0°  
 .XX ±0.13 [0.005]

MATERIAL

FINISH

CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE

DRAWN BY AND DATE  
JUSTIN XING 05-16-06

CHECKED BY AND DATE  
JUSTIN XING 05-16-06

APPROVED BY AND DATE  
KING CHIU 05-16-06

THIRD ANGLE PROJECTION



SCALE:  
1:1

SIZE: A3

TITLE

107 SERIES D-SUB,  
RIGHT ANGLE TYPE

DRAWING NO.

107-XX1X2X38102

FILE NO.:

SHEET 1 OF 1

REV

B

DO NOT SCALE DRAWING