



Note 1:
Inner diameter of connecting pipe must be minimum ID57,5mm (Please notice the center offset). This is to ensure min. bending radii of sonar and IMU cables.

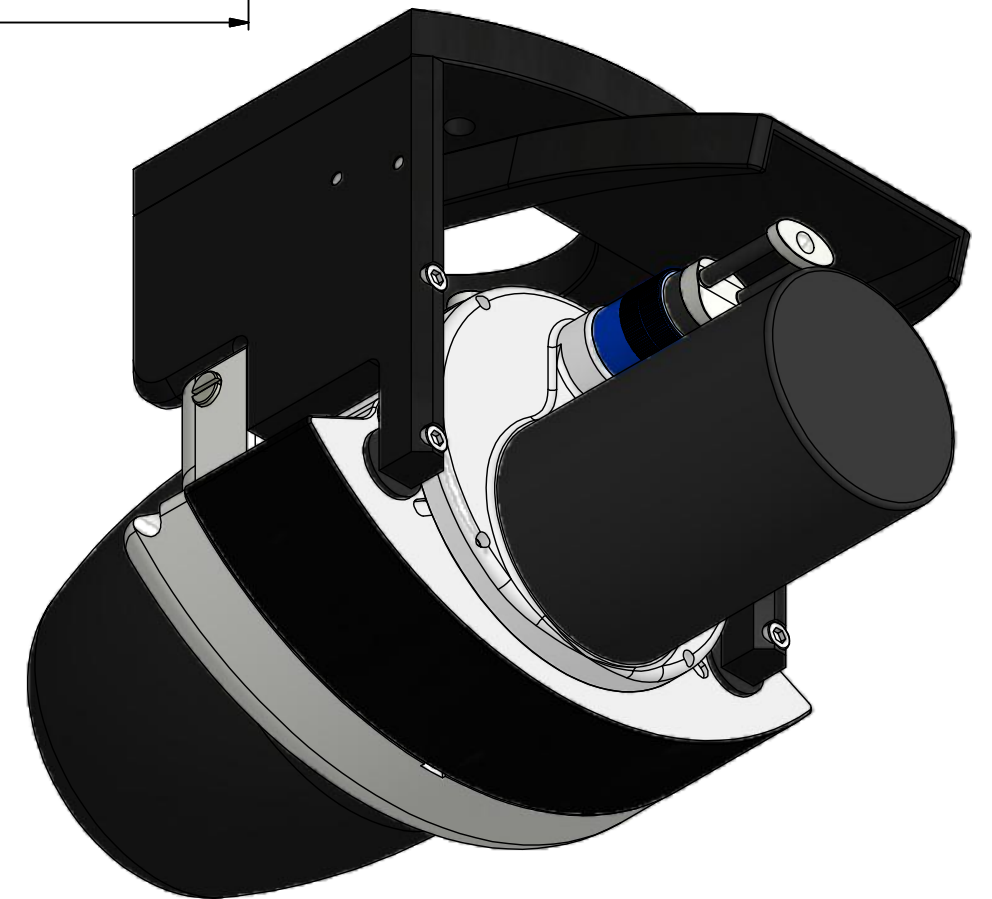

| | | | | |
|----------------------|-----------|------------------------------|---|--|
| | | | | NORBIT Norbit Stiklestadveien 1 7041 Trondheim Norway www.norbit.no |
| | | | | |
| Drawn: MS 05-12-2014 | | | | |
| WBMS_Bathy_PUBLIC | | | | This document is confidential and the property of Norbit and may not be reproduced in any form without the written consent of the owner. All copies shall be returned to Norbit on request. |
| | | Projection |  | Scale 1:2,5 |
| | Material: | All dimensions in millimeter | | Sheet size: A3 |
| Part no: 24003-1 | Surfaces: | Tolerances: | | Sheet 1 of 2 |