

1. Description

1.1. Project

Project Name	Seeed-LoRa-E5
Board Name	custom
Generated with:	STM32CubeMX 6.6.1
Date	07/14/2022


1.2. MCU

MCU Series	STM32WL
MCU Line	STM32WLEx
MCU name	STM32WLE5JCIx
MCU Package	UFBGA73
MCU Pin number	73

1.3. Core(s) information

Core(s)	ARM Cortex-M4	

2. Pinout Configuration

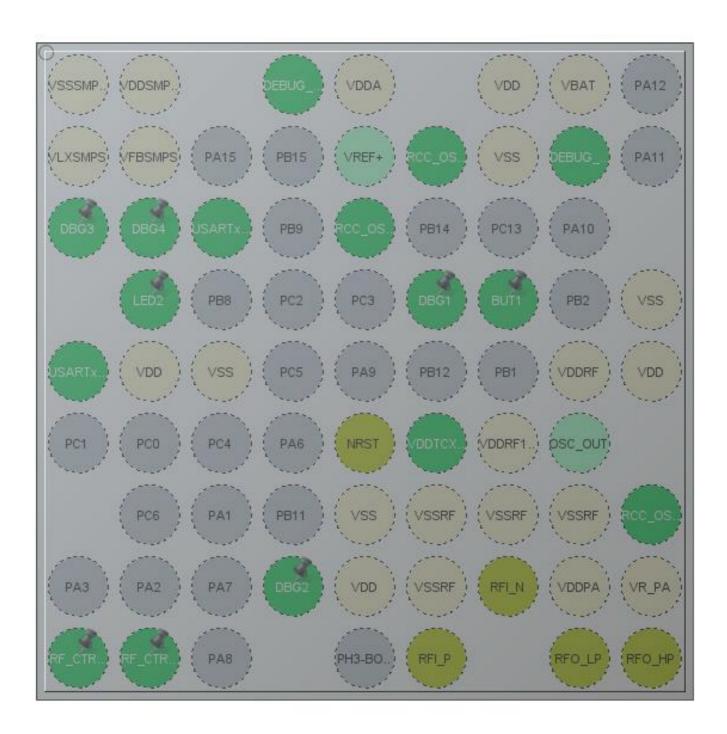

UFBGA73 (Top view)


3. Pins Configuration

Pin Number	Pin Name	Pin Type	Alternate	Label
UFBGA73	(function after		Function(s)	
	reset)			
A1	VSSSMPS	Power		
A2	VDDSMPS	Power		
A4	PA14	I/O	DEBUG_JTCK-SWCLK	
A5	VDDA	Power		
A7	VDD	Power		
A8	VBAT	Power		
B1	VLXSMPS	Power		
B2	VFBSMPS	Power		
B6	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
В7	VSS	Power		
B8	PA13	I/O	DEBUG_JTMS-SWDIO	
C1	PB3 *	I/O	GPIO_Output	DBG3
C2	PB4 *	I/O	GPIO_Output	DBG4
C3	PB7	I/O	USART1_RX	USARTx_RX
C5	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
D2	PB5 *	I/O	GPIO_Output	LED2
D6	PA0 *	I/O	GPIO_Output	DBG1
D7	PB13	I/O	GPIO_EXTI13	BUT1
D9	VSS	Power		
E1	PB6	I/O	USART1_TX	USARTx_TX
E2	VDD	Power		
E3	VSS	Power		
E8	VDDRF	Power		
E9	VDD	Power		
F5	NRST	Reset		
F6	PB0-VDD_TCXO	I/O	VDDTCXO	
F7	VDDRF1V55	Power		
G5	VSS	Power		
G6	VSSRF	Power		
G7	VSSRF	Power		
G8	VSSRF	Power		
G9	OSC_IN	MonolO	RCC_OSC_IN	
H4	PB10 *	I/O	GPIO_Output	DBG2
H5	VDD	Power		
H6	VSSRF	Power		
H7	RFI_N	MonolO		

Pin Number UFBGA73	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
H8	VDDPA	Power		
H9	VR_PA	Power		
J1	PA4 *	I/O	GPIO_Output	RF_CTRL1
J2	PA5 *	I/O	GPIO_Output	RF_CTRL2
J6	RFI_P	MonolO		
J8	RFO_LP	MonolO		
J9	RFO_HP	MonolO		

^{*} The pin is affected with an I/O function

4. Clock Tree Configuration

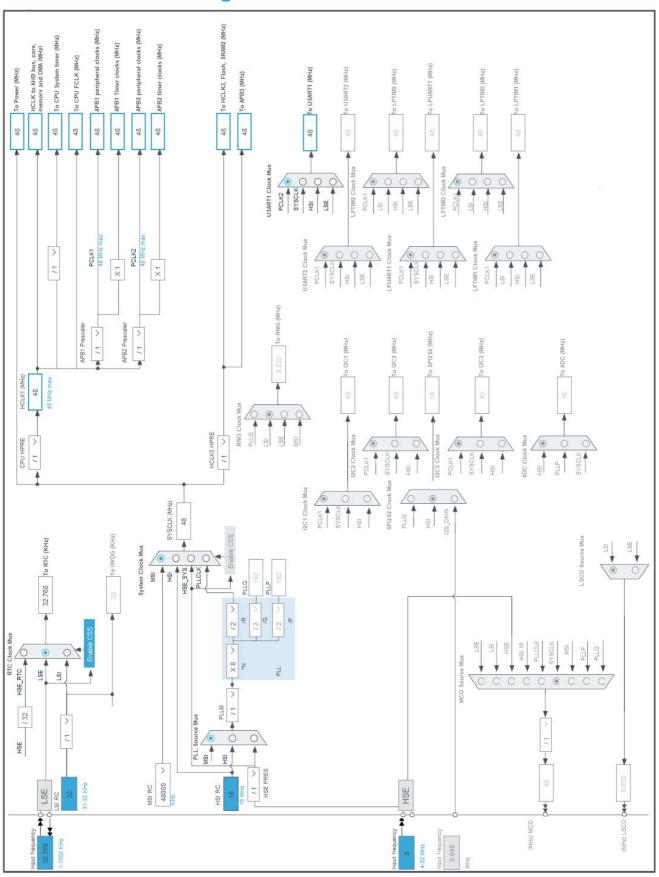

Page 5

5. Software Project

5.1. Project Settings

Name	Value
Project Name	Seeed-LoRa-E5
Project Folder	C:\Users\danam\STM32CubeIDE\workspace_1.7.0\Seeed-LoRa-E5
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_WL V1.2.0
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	Yes
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power	No
consumption)	
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_ADC_Init	ADC
4	MX_RTC_Init	RTC
5	MX_DMA_Init	DMA
6	MX_USART1_UART_Init	USART1
7	MX_SUBGHZ_Init	SUBGHZ
8	MX_LoRaWAN_Init	LORAWAN

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32WL
Line	STM32WLEx
MCU	STM32WLE5JCIx
Datasheet	DS13105_Rev7

6.2. Parameter Selection

Temperature	25
Vdd	3.0

6.3. Battery Selection

Battery	Li-SOCL2(AAA700)
Capacity	700.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	10.0 mA
Max Pulse Current	30.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP2
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-Medium/SMPS-OFF	NoRange
Fetch Type	SRAM1	NA
CPU Frequency	48 MHz	0 Hz
Clock Configuration	MSI	ALL CLOCKS OFF
Clock Source Frequency	48 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	5.65 mA	885 nA
Duration	0.1 ms	0.9 ms
DMIPS	60.0	0.0
Ta Max	124.47	125
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	565.8 µA
Battery Life	1 month, 21 days,	Average DMIPS	60.0 DMIPS
	1 hour		

6.6. Chart

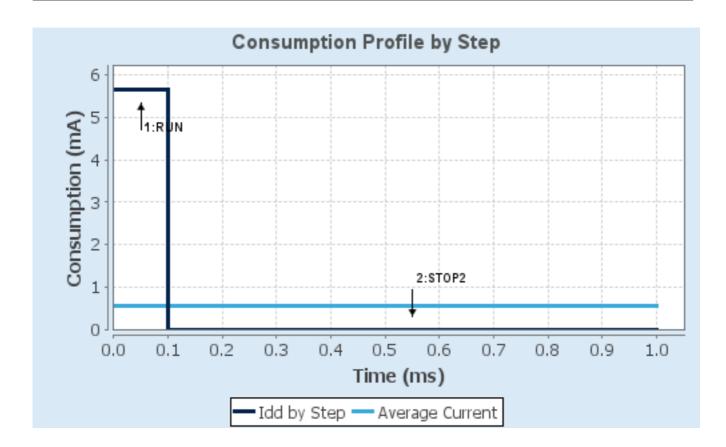

7. Peripherals and Middlewares Configuration

7.1. ADC

mode: Temperature Sensor Channel

mode: Vrefint Channel7.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler Synchronous clock mode divided by 4 *

Resolution ADC 12-bit resolution

Calibration Disable

Data Alignment Right alignment

Scan Conversion Mode Disabled

End Of Conversion Selection End of single conversion

Low Power Auto WaitDisabledAuto OffDisabledContinuous Conversion ModeDisabledDiscontinuous Conversion ModeDisabled

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

DMA Continuous Requests Disabled

Overrun behaviour Overrun data overwritten *

Sequencer Sequencer set to fully configurable

SamplingTime Common 1 160.5 Cycles *
SamplingTime Common 2 160.5 Cycles *

Oversampling Mode Disabled

Trigger Frequency High frequency

ADC_Regular_ConversionMode:

Enable Regular Conversions Disable

7.2. ADV_TRACE

mode: Enabled

7.3. DEBUG

JTAG and Trace: Serial Wire

7.4. MISC

mode: misc

7.5. RCC

High Speed Clock (HSE): TCXO

Low Speed Clock (LSE): Crystal/Ceramic Resonator

7.5.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Instruction Cache Enabled
Prefetch Buffer Disabled
Data Cache Enabled

Flash Latency(WS) 2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value 64

MSI Calibration Value 0

MSI Auto Calibration Enabled

HSE Startup Timout Value (ms) 100

LSE Startup Timout Value (ms) 5000

LSE Drive Capability

LSE oscillator low drive capability

Power Parameters:

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

7.6. RTC

mode: Activate Clock Source mode: Activate Calendar Alarm A: Internal Alarm A 7.6.1. Parameter Settings:

General:

Asynchronous Predivider value RTC_PREDIV_A *

Bin Mode Free running Binary mode *

SSRU Underflow Interrupt Enabled

Alarm A:

Free running 32 bit value 0

Binary AutoControl RTC_ALARMSUBSECONDBIN_AUTOCLR_NO *

Free running 32 bit mask SS[31:0] are compared and must match to activate alarm.

7.7. SEQUENCER

mode: Enabled

7.8. SUBGHZ

mode: Activated

7.8.1. Parameter Settings:

Baudrate Prescaler Value 4 *

7.9. SYS

Timebase Source: None

7.10. TIMER

mode: Enabled

7.11. TINY_LPM

mode: Enabled

7.12. USART1

Mode: Asynchronous

7.12.1. Parameter Settings:

Basic Parameters:

Baud Rate 115200

Word Length 8 Bits (including Parity)

Parity None Stop Bits 1

Advanced Parameters:

Data Direction Receive and Transmit

Over Sampling 16 Samples
Single Sample Disable
ClockPrescaler 1

Fifo Mode Enable *

Txfifo Threshold 1 eighth full configuration

Rxfifo Threshold 1 eighth full configuration

Advanced Features:

Auto Baudrate Disable TX Pin Active Level Inversion Disable RX Pin Active Level Inversion Disable Disable **Data Inversion** Disable TX and RX Pins Swapping Enable Overrun Enable DMA on RX Error MSB First Disable

7.13. LORAWAN

mode: Enabled

7.13.1. LoRaWAN application:

Application selection:

Application End Node skeleton *

Application configuration recommandations !! Please read carefully Information panel

below!!

board settings:

Send Tx on Timer or Button Evt TX_ON_TIMER

Probes Lines in Platform Settings true *

lora_app:

Active region LORAMAC_REGION_US915 *

Transmition duty cycle 10000
Application user port 2
Switch class port 3

Default class CLASS_A

Default handler message state

Unconfirmed message

Handler Adaptive Data Rate
On
Default activation type
OTAA
Force rejoin at each reboot
true
Default Unicast ping slots periodicity
4
Default reponse timeout for class b and class c confirmed downlink frames in milli seconds.
8000

sys_conf:

Trace verbose level VLEVEL_M

Enable Application Logging true
Disable Low Power Mode false
Enable Sensor false

7.13.2. LoRaWAN commissioning:

Commissioning:

Public network true

Current network ID 0

se-identity:

Static Device EUI false

App/Join EUI 01, 01, 01, 01, 01, 01, 01, 01, 01

Application key 9B,0C,9A,82,E6,74,A5,11,B9,E

5,26,A9,11,87,EB,84 *

Network key 8B,0C,9A,82,E6,74,A5,11,B9,E

5,26,A9,11,87,EB,84 *

Static Device Address fals

Network session key 2B,7E,15,16,28,AE,D2,A6,AB,F7,15,88,0

9,CF,4F,3C

Application session key 2B,7E,15,16,28,AE,D2,A6,AB,F7,15,88,0

9,CF,4F,3C

lorawan_conf:

Enable Key read access true

7.13.3. LoRaWAN middleware:

lorawan_conf:

Region(s) selection please select the desired region(s) in the

list below

Region Asia freq: 923 false
Region Australia freq: 915 false
Region China freq: 470 false
Region China freq: 779 false
Region Europe freq: 433 false

Region Europe freq: 868 true
Region Korea freq: 920 false
Region India freq: 865 false
Region USA freq: 915 true

Region Russia freq: 864 false
Enable Hybrid mode false
Enable LoRaMAC ClassB false

Enable the context management storage true *

Select the LoRaWAN Link Layer specification version v1.0.4 *

radio_conf:

1

Radio maximum wakeup time (in ms)

radio_board_if:

Select radio Driver

Bsp via extSettings *

mw_log_conf:

Enable Middleware log true

7.13.4. Platform Settings:

 ADC
 ADC

 RTC
 RTC

 USART
 USART1

 Debug Line 1
 PA0

 Debug Line 2
 PB10

 Debug Line 3
 PB3

 Debug Line 4
 PB4

^{*} User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
DEBUG	PA14	DEBUG_JTCK- SWCLK	n/a	n/a	n/a	
	PA13	DEBUG_JTMS- SWDIO	n/a	n/a	n/a	
RCC	PC14- OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15- OSC32_OU T	RCC_OSC32_O UT	n/a	n/a	n/a	
	PB0- VDD_TCXO	VDDTCXO	n/a	n/a	n/a	
	OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
USART1	PB7	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	USARTx_RX
	PB6	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	USARTx_TX
GPIO	PB3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High	DBG3
	PB4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High	DBG4
	PB5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High	LED2
	PA0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High	DBG1
	PB13	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	BUT1
	PB10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High	DBG2
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High	RF_CTRL1
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High	RF_CTRL2

8.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_TX	DMA1_Channel1	Memory To Peripheral	Low

USART1_TX: DMA1_Channel1 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: Enable *

Peripheral Data Width: Byte
Memory Data Width: Byte

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
RTC Tamper, RTC TimeStamp, LSECSS and RTC SSRU Interrupts	true	0	0
DMA1 Channel 1 Interrupt	true	2	0
USART1 Interrupt	true	2	0
EXTI Lines [15:10] Interrupt	true	0	0
RTC Alarms (A and B) Interrupt	true	0	0
SUBGHZ Radio Interrupt	true	0	0
PVD and PVM detector	unused		
FLASH (CFI) global Interrupt	unused		
RCC Interrupt	unused		
ADC Interrupt		unused	

8.3.2. NVIC Code generation


Enabled interrupt Table	Select for init	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	false
RTC Tamper, RTC TimeStamp, LSECSS and RTC SSRU Interrupts	false	true	true
DMA1 Channel 1 Interrupt	false	true	true
USART1 Interrupt	false	true	true

Enabled interrupt Table	Select for init	Generate IRQ	Call HAL handler
	sequence ordering	handler	
EXTI Lines [15:10] Interrupt	false	true	true
RTC Alarms (A and B) Interrupt	false	true	true
SUBGHZ Radio Interrupt	false	true	true

^{*} User modified value

9. System Views

- 9.1. Category view
- 9.1.1. Current

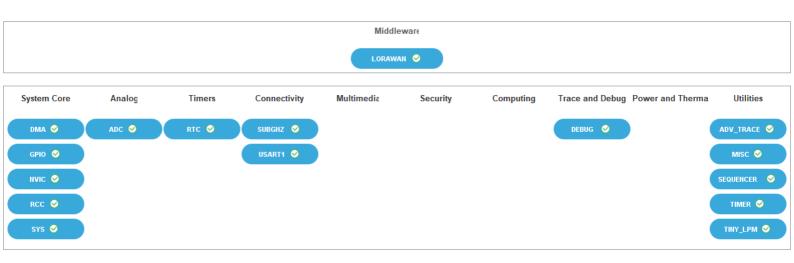

10. Docs & Resources

Type Link

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_embedded_software_solutions.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_eval-

tools_portfolio.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_stm8_functi

onal-safety-packages.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_software_development_tools.pdf

Presentations https://www.st.com/resource/en/product_presentation/microcontrollers_st

m32wl_series_product_overview.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32cubemonitor-

wireless-longrange_rftest.pdf

Flyers https://www.st.com/resource/en/flyer/flnucleolrwan.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32nucleo.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32wl.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32wbvl.pdf

Application Notes https://www.st.com/resource/en/application_note/an1181-electrostatic-

discharge-sensitivity-measurement-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application note/an1709-emc-design-

guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-stm32-

microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-

recommendations-and-package-information-for-leadfree-ecopack-mcus-

and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2834-how-to-get-the-

best-adc-accuracy-in-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2867-oscillator-

design-guide-for-stm8afals-stm32-mcus-and-mpus-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-stm32-crossseries-timer-overview-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4229-how-to-implement-a-vocoder-solution-using-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4894-eepromemulation-techniques-and-software-for-stm32-microcontrollersstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5036-thermal-management-guidelines-for-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5042-precise-hse-

frequency-and-startup-time-tuning-for-stm32-wireless-mcusstmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-tostm32-microcontrollers-security-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application_note/an5225-usb-typecpower-delivery-using-stm32-mcus-and-mpus-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application_note/an5406-how-to-build-alora-application-with-stm32cubewl-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application_note/an5407-optimized-rfboard-layout-for-stm32wl-series-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application note/an5408-migrating-fromstm32l0-stm32l1-and-stm32l4-series-associated-with-sx12xxtransceivers-to-stm32wl-series-microcontrollers-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application_note/an5409-stm32cubemcu-package-examples-for-stm32wl-series-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application_note/an5457-rf-matchingnetwork-design-guide-for-stm32wl-series-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application_note/an5480-how-to-build-asigfox-application-with-stm32cubewl-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application note/an5543-enhancedmethods-to-handle-spi-communication-on-stm32-devicesstmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application_note/an5568-ultralowpowerfeatures-of-stm32wl-series-microcontrollers-stmicroelectronics.pdf Application Notes https://www.st.com/resource/en/application note/an5690-vrefbufperipheral-applications-and-trimming-technique-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1202_freertos_guide-for related Tools freertos-guide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5664-rssi-and-snr-for-lora-modulation-on-stm32wl-series-stmicroelectronics.pdf

microcontroller-gpio-hardware-settings-and-lowpower-consumption-

Application Notes https://www.st.com/resource/en/application note/an4899-stm32-

stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an1602_semihosting_in for related Tools _truestudio-how-to-do-semihosting-in-truestudio-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an1801_stm32cubeprog for related Tools rammer_in_truestudio-installing-stm32cubeprogrammer-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/atollic_editing_keyboard

for related Tools _shortcuts-atollic-editing-keyboard-shortcuts-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/iar_to_atollic_truestudio

for related Tools __migration_guide-truestudio-for-arm-migration-guide-iar-embedded-

& Software workbench-to-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/stm32cubemx_installatio

for related Tools n in truestudio-stm32cubemx-installation-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-for related Tools smbuspmbus-embedded-software-expansion-for-stm32cube-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-

for related Tools inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application note/an4759-using-the-

for related Tools hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-

& Software stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-for related Tools processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4894-eeprom-for related Tools emulation-techniques-and-software-for-stm32-microcontrollers-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5042-precise-hse-

for related Tools frequency-and-startup-time-tuning-for-stm32-wireless-mcus-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5054-secure-for related Tools programming-using-stm32cubeprogrammer-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-

for related Tools with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5361-getting-started-

for related Tools with-projects-based-on-dualcore-stm32h7-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5394-getting-started-

for related Tools with-projects-based-on-the-stm32l5-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5406-how-to-build-a-

for related Tools lora-application-with-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5409-stm32cube-for related Tools mcu-package-examples-for-stm32wl-series-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5418-how-to-build-a-for related Tools simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf & Software

Application Notes https://www.st.com/resource/en/application_note/an5426-migrating-for related Tools graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software 550-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5480-how-to-build-a-

for related Tools sigfox-application-with-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5481-lorawan-at-

for related Tools commands-for-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5544-integration-for related Tools guide-of-sbsfu-on-stm32cubewl-including-kms-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5554-lorawan-

for related Tools firmware-update-over-the-air-with-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5564-getting-started-

for related Tools with-projects-based-on-dualcore-stm32wl-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5566-rf-certification-

for related Tools process-for-nucleowl55jc-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5682-how-to-secure-

& Software

Application Notes https://www.st.com/resource/en/application_note/an5687-longpacket-

for related Tools operation-with-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5731-stm32cubemx-

for related Tools and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

& Software

Errata Sheets https://www.st.com/resource/en/errata_sheet/es0506-stm32wle5xx-

stm32wle4xx-device-errata-stmicroelectronics.pdf

Datasheet https://www.st.com/resource/en/datasheet/dm00648230.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0214-stm32-

Manuals cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0223-cortexm0-Manuals programming-manual-for-stm32l0-stm32g0-stm32wl-and-stm32wb-series-

stmicroelectronics.pdf

Reference https://www.st.com/resource/en/reference_manual/rm0461-stm32wlex-

Manuals advanced-armbased-32bit-mcus-with-subghz-radio-solution-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1163-description-of-

& Articles wlcsp-for-microcontrollers-and-recommendations-for-its-use-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-

& Articles shipping-media-for-stm32-microcontrollers-in-bga-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packagesstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packagesstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packagesstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssoppackages-stmicroelectronics.pdf