


- Notes:
- 4 layer PCB: 2 layers for Customer Reference and 2 layers for Evaluation.
  - 20 mil trace (minimum) on all power and ground routes.
  - Decoupling capacitors are physically close to U1 VDD and U2 VCC, respectively.
  - Designed for TMD2772, and can be used with TMD2771 and other mechanically compatible 8-pin Type-A module packaged devices.
  - All resistors are EIA 0603 and capacitors are EIA 0402, unless otherwise noted.
  - Assembly drawing: TE-00-00108
  - PCB drawing: TE-30-00108

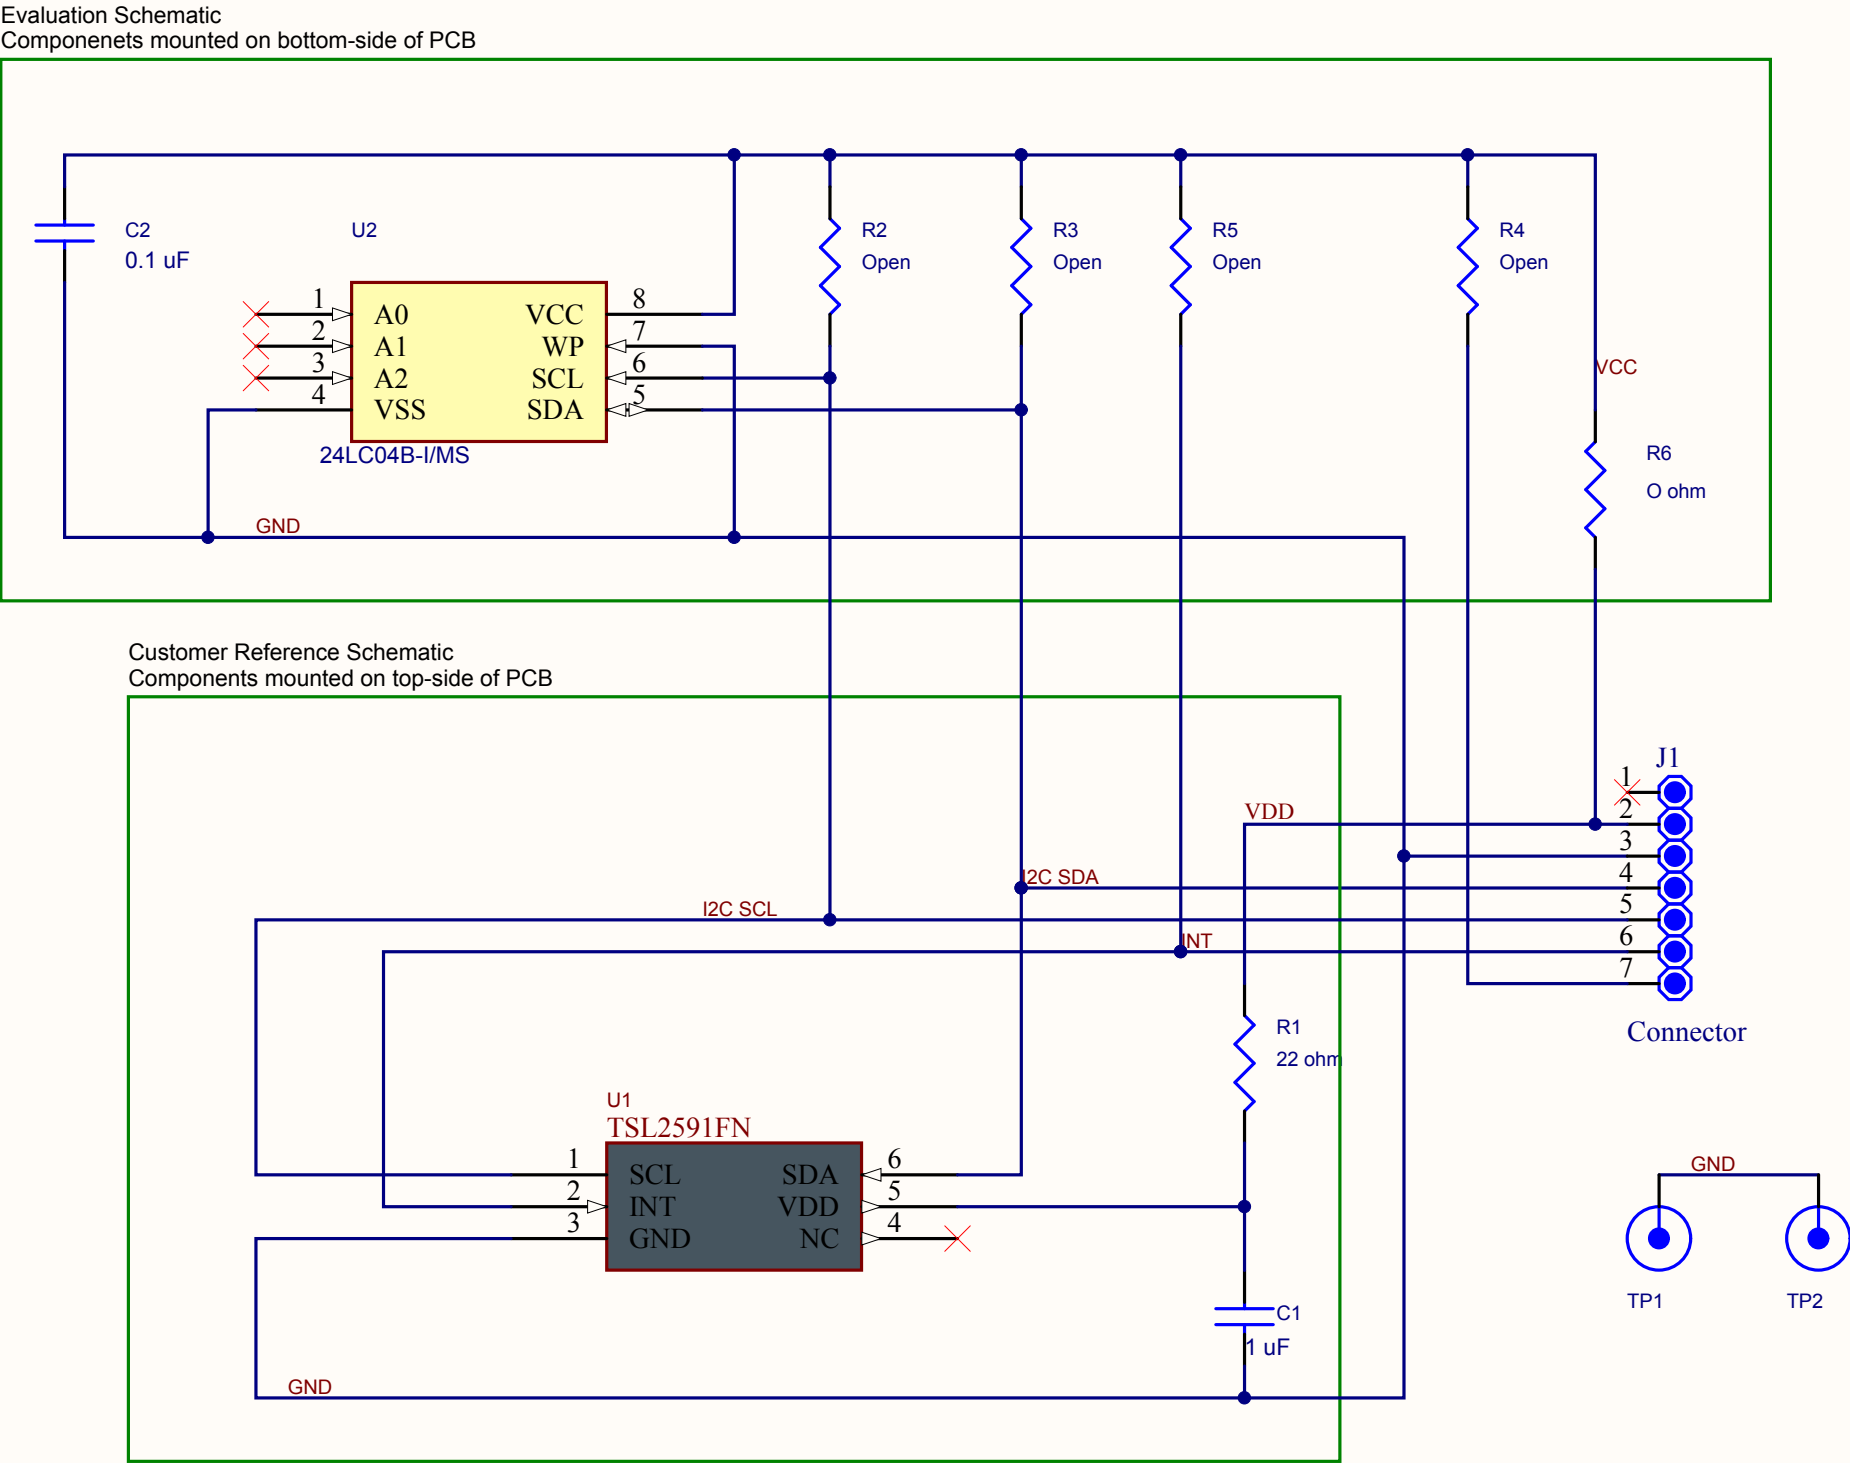

Title		
Size	Number	Revision
Letter		
Date:	10/15/2013	Sheet of
File:	D:\WORK\...\TSL2591 Schematic.SchDoc	Drawn By: