Online Examination Report

Date:	28.07.2014
Attempts:	1
Examinee:	Othieno, Leonard
Date of birth:	10/22/1985
Subject:	070-Operational procedures
Result:	0 %
Time used:	00:00:12 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	175	71.	OPERATIONAL PROCEDURES	0,00	1,00
2	179	71.	OPERATIONAL PROCEDURES	0,00	1,00
3	190	71.	OPERATIONAL PROCEDURES	0,00	1,00
4	149	71.1.1.3	General	0,00	1,00
5	39	71.1.2	Civil Aviation Regulations	0,00	1,00
6	31	71.1.2.3	Civil Aviation Regulations	0,00	1,00
7	22	71.1.2.6	Civil Aviation Regulations	0,00	1,00
8	52	71.1.3.3	MNPS Airspace	0,00	1,00
9	82	71.1.3.3	MNPS Airspace	0,00	1,00
10	29	71.1.3.3	MNPS Airspace	0,00	1,00
11	172	71.2	SPECIAL OPERATIONAL PROCEDURES	0,00	1,00
12	170	71.2	SPECIAL OPERATIONAL PROCEDURES	0,00	1,00
13	42	71.2.1	Operations Manual	0,00	1,00
14	21	71.2.1	Operations Manual	0,00	1,00
15	100	71.2.1	Operations Manual	0,00	1,00
16	20	71.2.1.1	Operating procedures	0,00	1,00
17	145	71.2.1.1	Operating procedures	0,00	1,00
18	34	71.2.1.1	Operating procedures	0,00	1,00
19	121	71.2.1.1	Operating procedures	0,00	1,00
20	140	71.2.2.1	On ground de-/anti-icing	0,00	1,00
21	114	71.2.2.1	On ground de-/anti-icing	0,00	1,00
22	47	71.2.5.3	Fire in the cabin, cockpit, cargo comp	0,00	1,00
23	117	71.2.5.3	Fire in the cabin, cockpit, cargo comp	0,00	1,00
24	37	71.2.5.3	Fire in the cabin, cockpit, cargo comp	0,00	1,00
25	87	71.2.5.6	Types of extinguishers	0,00	1,00
26	16	71.2.5.6	Types of extinguishers	0,00	1,00
27	141	71.2.5.6	Types of extinguishers	0,00	1,00
28	134	71.2.5.6	Types of extinguishers	0,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter		Points	Max. Points
29	86	71.2.7.1	Effects and recognition		0,00	1,00
30	162	71.2.8	Wake turbulence		0,00	1,00
31	15	71.2.8.1	Cause		0,00	1,00
32	12	71.2.8.1	Cause		0,00	1,00
33	38	71.2.8.2	List of relevant parameters		0,00	1,00
34	79	71.2.9	Security (unlawful events)		0,00	1,00
35	83	71.2.9.1	ICAO Annex 17		0,00	1,00
36	55	71.2.9.2	Use of SSR		0,00	1,00
37	111	71.2.12	Transport of dangerous goods		0,00	1,00
38	164	71.2.12	Transport of dangerous goods		0,00	1,00
39	8	71.2.12	Transport of dangerous goods		0,00	1,00
40	70	71.2.13	Contaminated runways		0,00	1,00
				Total:0%	**0,00**	**40,00**

Attachment 2: List of result by topic

Licence

Date: 28.07.2014

Examinee: Othieno, Leonard

Location: Uganda Civil Aviation Authority

Your Result: 0,00 from 40,00 Points (0,00 %)

Topics	Ammount of Questions	Points achieved	Maximum Points	Percent
71. OPERATIONAL PROCEDURES	40	0,00	40,00	0,00
71.1. GENERAL REQUIREMENTS	7	0,00	7,00	0,00
71.2. SPECIAL OPERATIONAL PROCEDURES	30	0,00	30,00	0,00
Total	**40**	**0,00**	**40,00**	**0,00**

See Attachments:

1. atp_126.jpg	Figure 126	(Attachment No.1)

1

(Refer to Figure 126.) Which altitude (box 1) is applicable to the vertical extent of the inner and outer circles (now called surface and shelf areas)?

☐ **4,000 feet above airport.**

☐ **3,000 feet above airport.**

☐ **3,000 feet AGL.**

ID: 175(LTS:226024, LTM:207)
Syllabus reference: 71. OPERATIONAL PROCEDURES

Max. Points 1,00
Points 0,00

© LPLUS GmbH, LPLUS TestStudio®

2

What aural and visual indications should be observed over an ILS middle marker?

- ☐ **Continuous dots at the rate of six per second.**
- ☐ **Alternate dots and dashes at the rate of two per second.**
- ☐ **Continuous dashes at the rate of two per second.**

ID: 179(LTS:226028, LTM:211)
Syllabus reference: 71. OPERATIONAL PROCEDURES

Max. Points 1,00
Points 0,00

3

What effect would a light crosswind of approximately 7 knots have on vortex behavior?

- ☐ The downwind vortex would tend to remain over the runway.
- ☐ The upwind vortex would tend to remain over the runway.
- ☐ The light crosswind would rapidly dissipate vortex strength.

ID:	190(LTS:226039, LTM:222)	Max. Points	1,00
Syllabus reference:	71. OPERATIONAL PROCEDURES	Points	0,00

4

Which one of the following sets of conditions is most likely to attract birds to an aerodrome ?

- ☐ **a refuse tip in close proximity**
- ☐ **a modern sewage tip in close proximity**
- ☐ **mowing and maintaining the grass long**
- ☐ **the extraction of minerals such as sand and gravel**

ID:	149(LTS:226163, LTM:178)	Max. Points	1,00
Syllabus reference:	71.1.1.3 General	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

5

An operator must ensure that, for the duration of each flight, be kept on the ground a copy of the :

- ☐ **operation flight plan.**
- ☐ **flight plan processing.**
- ☐ **flight route sheet.**
- ☐ **ATC (Air Traffic Control) flight plan.**

ID:	39(LTS:226020, LTM:41)	Max. Points	1,00
Syllabus reference:	71.1.2 Civil Aviation Regulations	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

6

According to Annex 6, what is the definition of an Air Operator Certificate?

- ☐ A certificate automatically authorising an operator to carry out domestic air services in any ICAO contracting State.
- ☐ A certificate authorising an operator to carry out specified commercial air transport operations.
- ☐ A certificate the crew will present to immigration officers, stating that all passengers on board fulfil the visa requirements needed.
- ☐ A certificate needed to carry out specified commercial international air transport operations, but not for domestic commercial flights.

ID:	31(LTS:226179, LTM:33)	Max. Points	1,00
Syllabus reference:	71.1.2.3 Civil Aviation Regulations	Points	0,00

7

In accordance with civil aviation regulations, an aeroplane whose maximum approved passenger seating configuration is greater than 600 seats must be equipped with at least:

- ☐ **9 hand fire-extinguishers conveniently located in the passenger compartment.**
- ☐ **6 hand fire-extinguishers conveniently located in the passenger compartment.**
- ☐ **8 hand fire-extinguishers conveniently located in the passenger compartment.**
- ☐ **7 hand fire-extinguishers conveniently located in the passenger compartment.**

ID:	22(LTS:226155, LTM:23)	Max. Points	1,00
Syllabus reference:	71.1.2.6 Civil Aviation Regulations	Points	0,00

8

In the event of communication failure in an Mininimum Navigation Perfomance Specification(MNPS) airspace, the pilot must:

- ☐ change the flight level in accordance with predetermined instructions.
- ☐ continue the flight in compliance with the last oceanic clearance received and acknowledged.
- ☐ join one of the so-called "special" routes.
- ☐ return to the flight plan route if it is different from the last oceanic clearance received and acknowledged.

ID:	52(LTS:226069, LTM:54)	Max. Points	1,00
Syllabus reference:	71.1.3.3 MNPS Airspace	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

9

An aircraft operating within MNPS Airspace is unable to continue flight in accordance with its air traffic control clearance, but is able to maintain its assigned level, and due to a total loss of communications capability, cannot obtain a revised clearance from ATC. The aircraft should offset from the assigned route by 15 NM and climb or descent 500 ft, if:

- ☐ **at FL410**
- ☐ **at FL430**
- ☐ **above FL410**
- ☐ **below FL410**

ID:	82(LTS:226073, LTM:87)	Max. Points	1,00
Syllabus reference:	71.1.3.3 MNPS Airspace	Points	0,00

10

In airspace where MNPS is applicable, the minimum vertical separation between FL 290 and FL 410 is:

- ☐ **500 ft**
- ☐ **1 500 ft**
- ☐ **1 000 ft**
- ☐ **2000ft**

ID:	29(LTS:226065, LTM:31)	Max. Points	1,00
Syllabus reference:	71.1.3.3 MNPS Airspace	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

11

An airplane operated by a supplemental air carrier flying over uninhabited terrain must carry which emergency equipment?

- ☐ **Survival kit for each passenger.**
- ☐ **Colored smoke flares and a signal mirror.**
- ☐ **Suitable pyrotechnic signaling devices.**

ID:	172(LTS:226058, LTM:203)	Max. Points	1,00
Syllabus reference:	71.2 SPECIAL OPERATIONAL PROCEDURES	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

12

When a supplemental air carrier is operating over an uninhabited area, how many appropriately equipped survival kits are required aboard the aircraft?

- ☐ One for each passenger, plus 10 percent.
- ☐ One for each occupant of the aircraft.
- ☐ One for each passenger seat.

ID:	170(LTS:226057, LTM:201)	Max. Points	1,00
Syllabus reference:	71.2 SPECIAL OPERATIONAL PROCEDURES	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

13

During a flight, the chief steward informs the crew that a passenger is using a portable device suspected to disburb the aircraft electronic systems. The captain:

- ☐ **must not authorize any person to use such a device on board.**
- ☐ **authorizes its use during the whole flight phase.**
- ☐ **may authorize the use of this device, as an exception.**
- ☐ **authorizes its use except during take-off and landing phases.**

ID:	42(LTS:226135, LTM:44)	Max. Points	1,00
Syllabus reference:	71.2.1 Operations Manual	Points	0,00

14

You are the captain of a commercial airplane and you notice, after take-off, a flock of birds which may present a bird strike hazard, you must:

- ☐ **draft a bird strike hazard report upon arrival and within at most 48 hours.**
- ☐ **immediately inform the appropriate ground station.**
- ☐ **inform the appropriate ground station within a reasonable period of time.**
- ☐ **inform the other aircraft by radio.**

ID: 21(LTS:226134, LTM:22)
Syllabus reference: 71.2.1 Operations Manual

Max. Points 1,00
Points 0,00

© LPLUS GmbH, LPLUS TestStudio®

15

Information concerning evacuation procedures can be found in the :

☐ **flight manual.**

☐ **operation manual.**

☐ **operational flight plan.**

☐ **journey logbook.**

ID:	100(LTS:226131, LTM:116)	Max. Points	1,00
Syllabus reference:	71.2.1 Operations Manual	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

16

According to civil aviation regulations in East Africa, the Minimum Equipment List of an aircraft is found in the:

- ☐ flight record.
- ☐ operations manual.
- ☐ flight manual.
- ☐ CAA OPS.

ID:	20(LTS:226094, LTM:21)	Max. Points	1,00
Syllabus reference:	71.2.1.1 Operating procedures	Points	0,00

17

During a night flight, an observer located in the cockpit, seeing an aircraft coming from the front left, will first se the :

- ☐ **green steady light**
- ☐ **white steady light**
- ☐ **green flashing light**
- ☐ **red steady light**

ID: 145(LTS:226110, LTM:173)
Syllabus reference: 71.2.1.1 Operating procedures

Max. Points 1,00
Points 0,00

© LPLUS GmbH, LPLUS TestStudio®

18

Flight crew members on the flight deck shall keep their safety belt fastened:

- ☐ **while at their station.**
- ☐ **only during take off and landing and whenever necessary by the commander in the interest of safety.**
- ☐ **only during take off and landing.**
- ☐ **from take off to landing.**

ID:	34(LTS:226093, LTM:36)	Max. Points	1,00
Syllabus reference:	71.2.1.1 Operating procedures	Points	0,00

19

A category III A is an approach which may be carried out with a runway visual range of at least :

- ☐ **100 m**
- ☐ **50 m**
- ☐ **250 m**
- ☐ **200 m**

ID: 121(LTS:226118, LTM:143)
Syllabus reference: 71.2.1.1 Operating procedures

Max. Points 1,00
Points 0,00

© LPLUS GmbH, LPLUS TestStudio®

20

An aircraft having undergone an anti-icing procedure and having exceeded the protection time of the anti-icing fluid:

- [ ] **must only undergo a de-icing procedure for take-off.**
- [ ] **need not to undergo a new anti-icing procedure for take-off.**
- [ ] **must only undergo a new anti-icing procedure for take-off.**
- [ ] **must undergo a de-icing procedure before a new application of anti-icing fluid for take-off.**

ID:	140(LTS:226206, LTM:168)	Max. Points	1,00
Syllabus reference:	71.2.2.1 On ground de-/anti-icing	Points	0,00

21

The anti-icing fluid protecting film can wear off and reduce considerably the protection time:

- ☐ **when the outside temperature is close to 0 °C.**
- ☐ **when the airplane is into the wind.**
- ☐ **when the temperature of the airplane skin is close to 0 °C.**
- ☐ **during strong winds or as a result of the other aircraft engines jet wash.**

ID:	114(LTS:226208, LTM:134)	Max. Points	1,00
Syllabus reference:	71.2.2.1 On ground de-/anti-icing	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

22

According to AOC of EAC regulations, at least one of the following hand fire extinguishers must be conveniently located on the flight deck:

- ☐ **a water fire-extinguisher.**
- ☐ **a foam fire-extinguisher.**
- ☐ **a powder fire-extinguisher.**
- ☐ **a halon fire-extinguisher or equivalent.**

ID:	47(LTS:226183, LTM:49)	Max. Points	1,00
Syllabus reference:	71.2.5.3 Fire in the cabin, cockpit, cargo comp	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

23

To extinguish a fire in the cockpit, you use:
1. a water fire-extinguisher
2. a powder or chemical fire-extinguisher
3. a halon fire-extinguisher
4. a CO2 fire-extinguisher

- ☐ **1, 2, 3, 4**
- ☐ **2, 3, 4**
- ☐ **3, 4**
- ☐ **1, 2**

ID:	117(LTS:226185, LTM:138)	Max. Points	1,00
Syllabus reference:	71.2.5.3 Fire in the cabin, cockpit, cargo comp	Points	0,00

24

Beneath fire extinguishers the following equipment for fire fighting is on board:

- ☐ **a big bunch of fire extinguishing blankets.**
- ☐ **water and all type of beverage.**
- ☐ **a hydraulic winch and a big box of tools.**
- ☐ **crash axes or crowbars.**

ID:	37(LTS:226182, LTM:39)	Max. Points	1,00
Syllabus reference:	71.2.5.3 Fire in the cabin, cockpit, cargo comp	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

25

CO_2 type extinguishers are fit to fight:
1 - class A fires
2 - class B fires
3 - electrical source fires
4 - special fires: metals, gas, chemical product
Which of the following combinations contains all the correct statements:

- ☐ **2 - 3 - 4**
- ☐ **1 - 2 - 3**
- ☐ **1 - 2 - 4**
- ☐ **1 - 3 - 4**

ID:	87(LTS:226077, LTM:95)	Max. Points	1,00
Syllabus reference:	71.2.5.6 Types of extinguishers	Points	0,00

26

You will use a CO2 fire-extinguisher for :
1. a paper fire
2. a plastic fire
3. a hydrocarbon fire
4. an electrical fire
The combination regrouping all the correct statements is:

- ☐ **3,4**
- ☐ **2,3**
- ☐ **1,2,3,4**
- ☐ **1,2,3**

ID: 16(LTS:226082, LTM:17)
Syllabus reference: 71.2.5.6 Types of extinguishers

Max. Points 1,00
Points 0,00

© LPLUS GmbH, LPLUS TestStudio®

27

A fire occurs in a wheel and immediate action is required to extinguish it. The safest extinguishant to use is :

- ☐ **water**
- ☐ **foam**
- ☐ **dry powder**
- ☐ **CO_2 (carbon dioxide)**

ID:	141(LTS:226080, LTM:169)	Max. Points	1,00
Syllabus reference:	71.2.5.6 Types of extinguishers	Points	0,00

28

The fire extinguisher types which may be used on class B fires are:
1 - H2O,
2 - CO2,
3 - dry-chemical,
4 - halogen

- ☐ **3 - 4**
- ☐ **2**
- ☐ **1 - 2 - 3 - 4,**
- ☐ **2 - 3 - 4**

ID:	134(LTS:226081, LTM:162)	Max. Points	1,00
Syllabus reference:	71.2.5.6 Types of extinguishers	Points	0,00

29

Wind shear is:

- ☐ a variation only in horizontal wind velocity over a short distance.
- ☐ a variation in vertical or horizontal wind velocity and / or wind direction over a large distance.
- ☐ a variation only in vertical wind velocity over a short distance.
- ☐ a large variation in vertical or horizontal wind velocity and / or wind direction over a short distance.

ID:	86(LTS:226203, LTM:93)	Max. Points	1,00
Syllabus reference:	71.2.7.1 Effects and recognition	Points	0,00

30

The greatest wake turbulence occurs when the generating aircraft is :

- ☐ **Small, light, at maximum speed in full flaps configuration**
- ☐ **Small, light, at low speed in clean configuration**
- ☐ **Large, heavy, at maximum speed in full flaps configuration**
- ☐ **Large, heavy, at low speed in clean configuration**

ID:	162(LTS:226151, LTM:193)	Max. Points	1,00
Syllabus reference:	71.2.8 Wake turbulence	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

31

Aeroplane wake turbulence during take off starts when:

- ☐ the take off roll commences.
- ☐ out of ground effect.
- ☐ the nose wheel lifts off the runway.
- ☐ slats and flaps are extended only.

ID:	15(LTS:226145, LTM:15)	Max. Points	1,00
Syllabus reference:	71.2.8.1 Cause	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

32

The wake turbulence caused by an aircraft is mainly the result of:

1. An aerodynamic effect (wing tip vortices).
2. The engines action (propellers rotation or engine gas exhausts).
3. The importance of the drag devices (size of the landing gear, of the flaps, etc.).

The combination regrouping all the correct statements is:

- ☐ **1, 2 and 3.**
- ☐ **1.**
- ☐ **2 and 3.**
- ☐ **3.**

ID:	12(LTS:226144, LTM:12)	Max. Points	1,00
Syllabus reference:	71.2.8.1 Cause	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

33

The greatest wake turbulence occurs when the generating aircraft is:

- ☐ **Large, heavy, at maximum speed in full flaps configuration**
- ☐ **Small, light, at maximum speed in full flaps configuration**
- ☐ **Small, light, at low speed in clean configuration**
- ☐ **Large, heavy, at low speed in clean configuration**

ID:	38(LTS:226188, LTM:40)	Max. Points	1,00
Syllabus reference:	71.2.8.2 List of relevant parameters	Points	0,00

34

What transponder code should be used to provide recognition of an aircraft which is being subjected to unlawful interference :

- ☐ **code 7600**
- ☐ **code 7700**
- ☐ **code 7500**
- ☐ **code 2000**

ID:	79(LTS:226159, LTM:83)	Max. Points	1,00
Syllabus reference:	71.2.9 Security (unlawful events)	Points	0,00

35

In addition to informing each State, whose citizens are known to be on board an aircraft, the State of the country in which an aircraft has landed after an act of unlawful interference must immediately notify the :

- ☐ **State of Registry of the aircraft and the State of the operator only**
- ☐ **State of Registry of the aircraft and the CAA**
- ☐ **State of Registry of the aircraft, the State of the operator and ICAO**
- ☐ **State of the operator, the CAA. and ICAO**

ID:	83(LTS:226158, LTM:88)	Max. Points	1,00
Syllabus reference:	71.2.9.1 ICAO Annex 17	Points	0,00

36

What is the transponder code to be used by the commander of an aircraft that is subject to unlawful interference?

- ☐ **A 7500**
- ☐ **A 7700**
- ☐ **A 7800**
- ☐ **A 7600**

ID:	55(LTS:226197, LTM:59)	Max. Points	1,00
Syllabus reference:	71.2.9.2 Use of SSR	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

37

ICAO (International Civil Aviation Organization) Appendix 18 is a document dealing with :

- ☐ **the technical operational use of aircraft**
- ☐ **the air transport of live animals**
- ☐ **the noise pollution of aircraft**
- ☐ **the safety of the air transport of dangerousgoods**

ID:	111(LTS:226140, LTM:131)	Max. Points	1,00
Syllabus reference:	71.2.12 Transport of dangerous goods	Points	0,00

© LPLUS GmbH, LPLUS TestStudio®

38

In compliance with the civil aviation regulations in order to carry dangerous goods on board a public transport airplane, they must be accompanied with a :

- ☐ representative of the company owning the materials.
- ☐ system to warn the crew in case of a leak or of an abnormal
- ☐ transport document for dangerous goods.
- ☐ specialized handling employee.

ID:	164(LTS:226142, LTM:195)	Max. Points	1,00
Syllabus reference:	71.2.12 Transport of dangerous goods	Points	0,00

39

In the hazardous materials transportation act, the freight compliance with the regulatory arrangements is the responsibility of the :

- ☐ **aerodrome manager.**
- ☐ **captain.**
- ☐ **sender.**
- ☐ **station manager.**

ID:	8(LTS:226138, LTM:8)	Max. Points	1,00
Syllabus reference:	71.2.12 Transport of dangerous goods	Points	0,00

40

A braking action of 0.25 and below reported on a SNOWTAM is :

- ☐ **good**
- ☐ **medium**
- ☐ **unreliable**
- ☐ **poor**

ID:	70(LTS:226051, LTM:74)	Max. Points	1,00
Syllabus reference:	71.2.13 Contaminated runways	Points	0,00

Attachment No. 1

Questions 1

Figure 126

atp_126.jpg

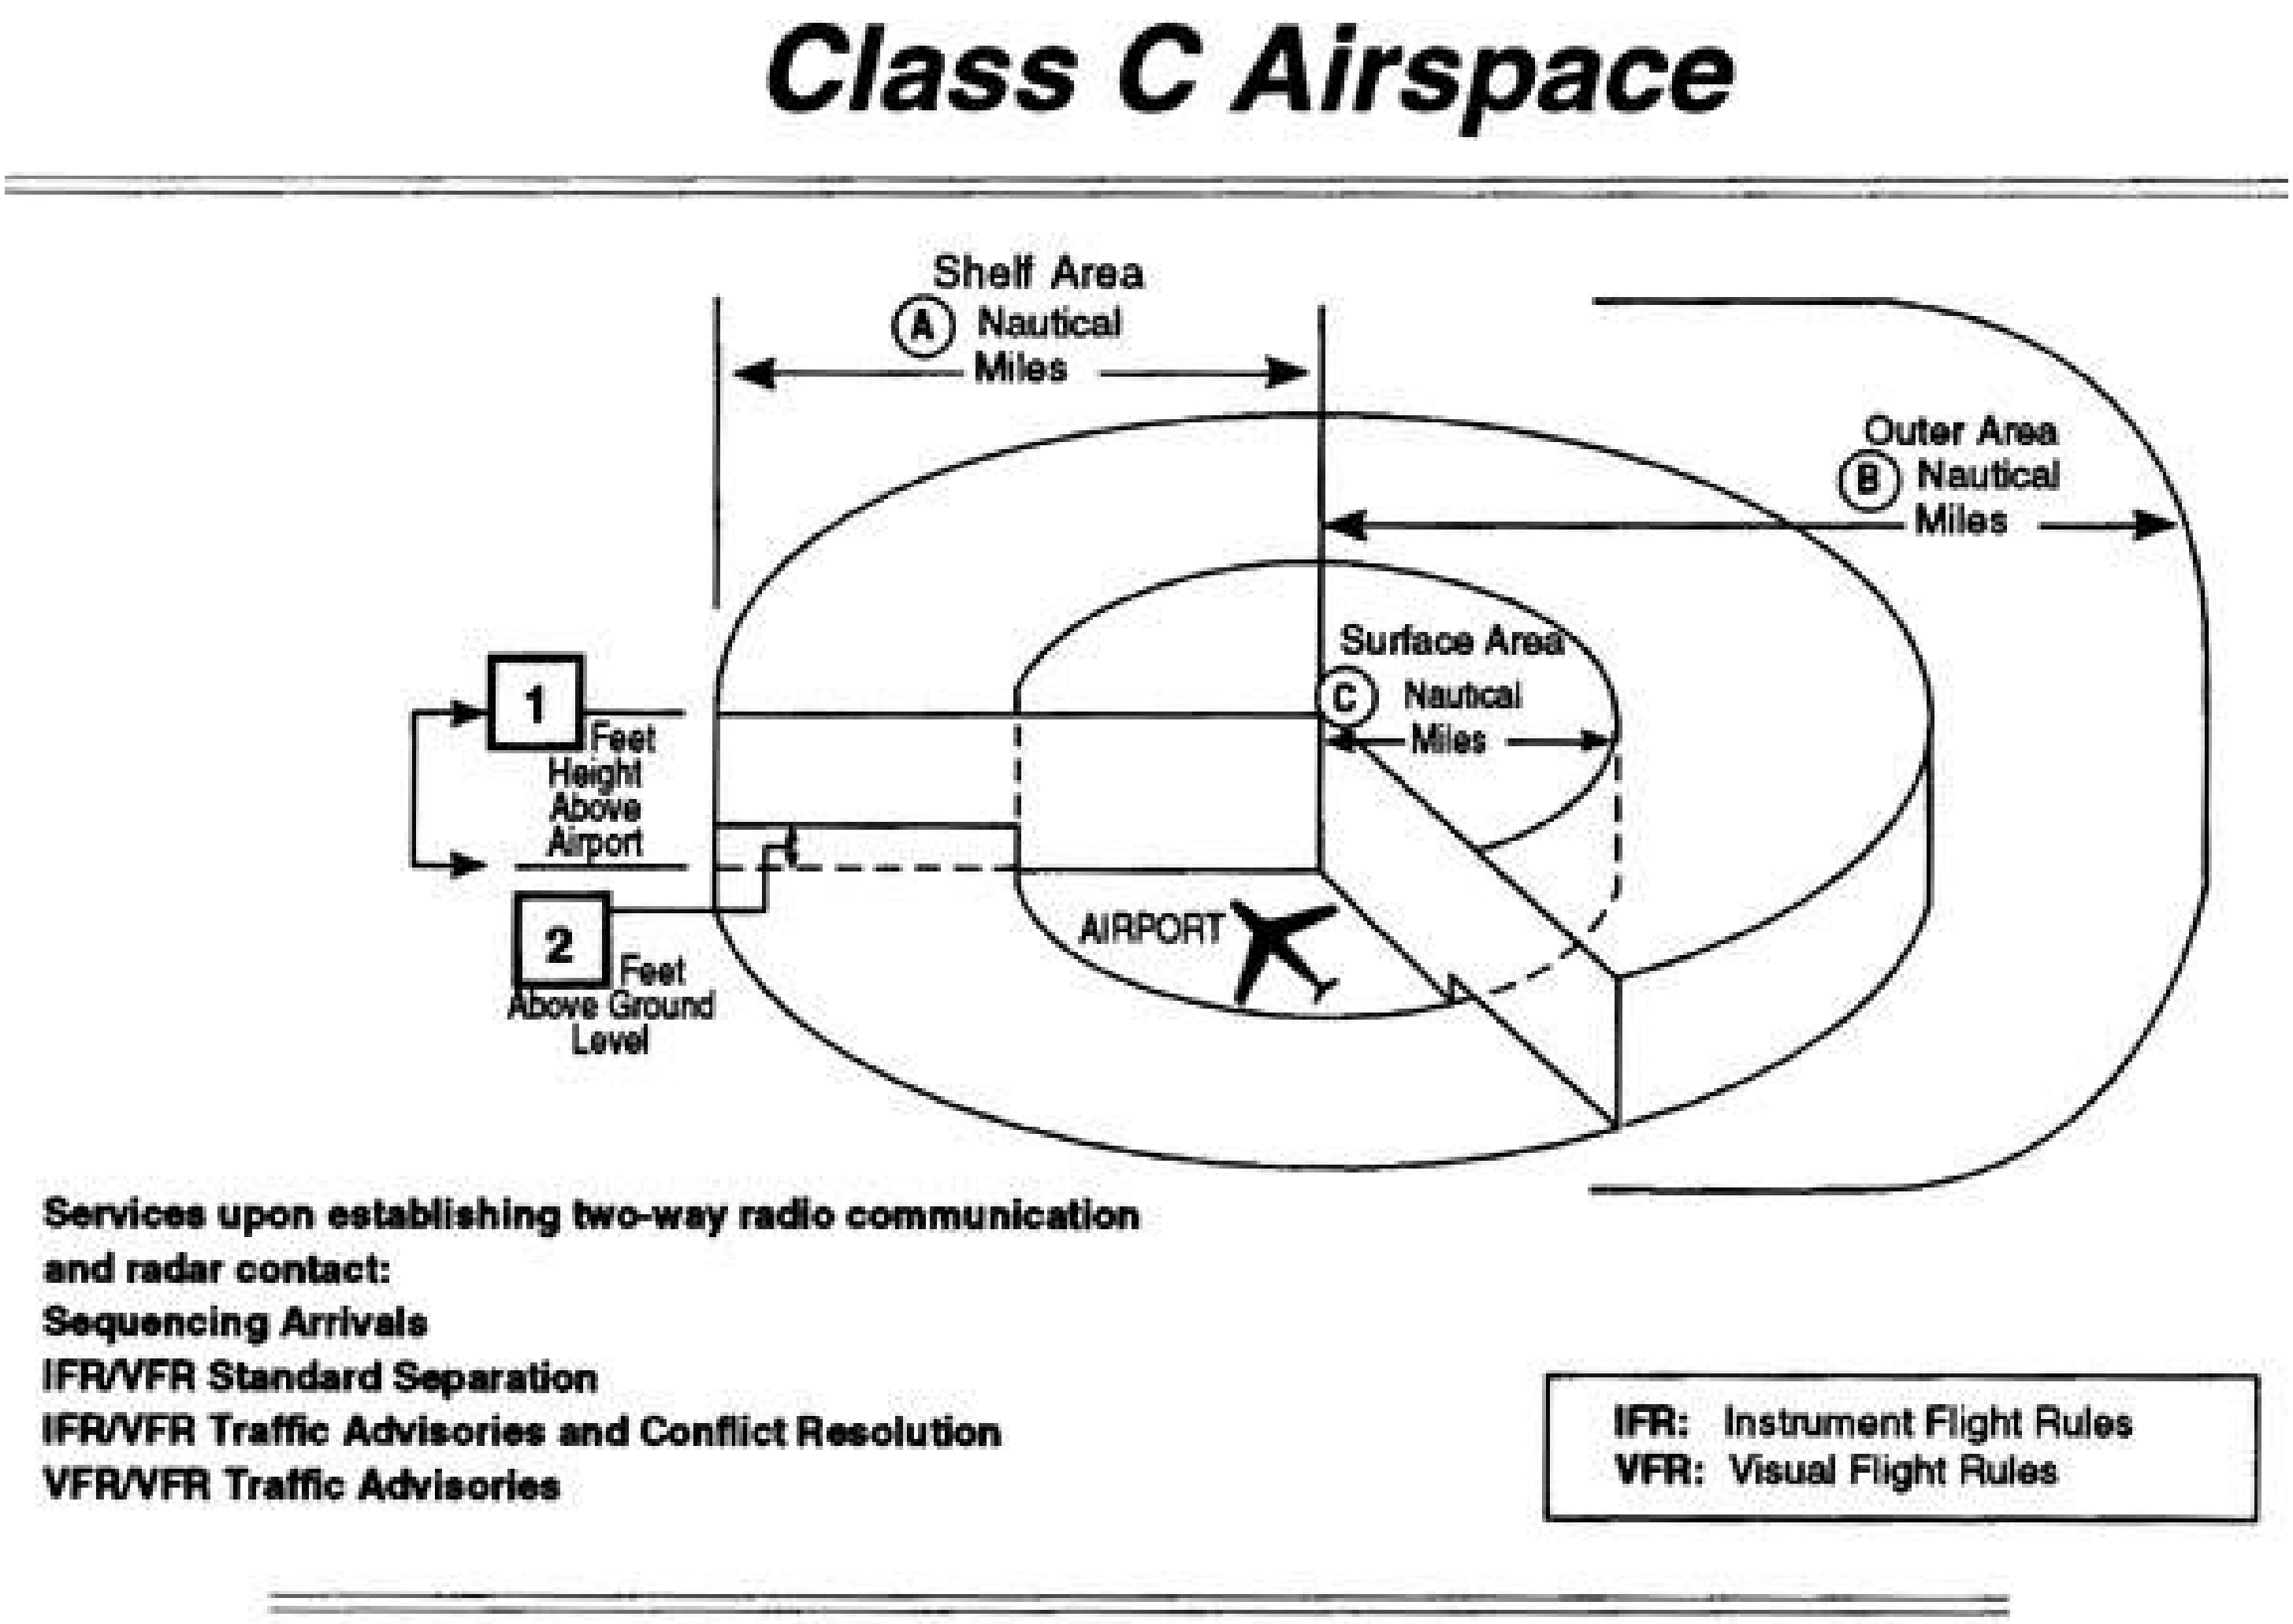

Figure 126. Class C Airspace © ASA