

Online Examination Report

Date:	15.08.2014
Attempts:	1
Examinee:	Mwakagile, Faraja
Date of birth:	7/27/1979
Subject:	070-Operational procedures
Result:	44,99 %
Time used:	00:30:00 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	174	71. OPERATIONAL PROCEDURES		1,00	1,00
2	185	71. OPERATIONAL PROCEDURES		0,00	1,00
3	175	71. OPERATIONAL PROCEDURES		0,00	1,00
4	56	71.1.1 ICAO Annex 6		1,00	1,00
5	25	71.1.1 ICAO Annex 6		1,00	1,00
6	31	71.1.2.3 Civil Aviation Regulations		1,00	1,00
7	76	71.1.2.6 Civil Aviation Regulations		0,00	1,00
8	167	71.1.3.2 Transoceanic and polar flight		1,00	1,00
9	168	71.1.3.2 Transoceanic and polar flight		1,00	1,00
10	170	71.2 SPECIAL OPERATIONAL PROCEDURES		1,00	1,00
11	100	71.2.1 Operations Manual		1,00	1,00
12	110	71.2.1.1 Operating procedures		0,00	1,00
13	160	71.2.1.1 Operating procedures		1,00	1,00
14	123	71.2.1.1 Operating procedures		1,00	1,00
15	135	71.2.1.1 Operating procedures		0,00	1,00
16	34	71.2.1.1 Operating procedures		0,00	1,00
17	109	71.2.1.1 Operating procedures		0,00	1,00
18	107	71.2.1.1 Operating procedures		0,00	1,00
19	171	71.2.1.1 Operating procedures		1,00	1,00
20	3	71.2.2 Icing conditions		1,00	1,00
21	148	71.2.2 Icing conditions		1,00	1,00
22	163	71.2.2.1 On ground de-/anti-icing		0,00	1,00
23	117	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
24	50	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
25	98	71.2.5.6 Types of extinguishers		0,00	1,00
26	134	71.2.5.6 Types of extinguishers		0,00	1,00
27	62	71.2.7 Wind shear and microburst		0,00	1,00
28	6	71.2.7 Wind shear and microburst		1,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
29	162	71.2.8	Wake turbulence	0,00	1,00
30	166	71.2.8	Wake turbulence	0,00	1,00
31	15	71.2.8.1	Cause	0,00	1,00
32	17	71.2.9.1	ICAO Annex 17	0,00	1,00
33	164	71.2.12	Transport of dangerous goods	1,00	1,00
34	165	71.2.12	Transport of dangerous goods	1,00	1,00
35	8	71.2.12	Transport of dangerous goods	0,00	1,00
36	97	71.2.12.1	ICAO Annex 18	1,00	1,00
37	142	71.2.13	Contaminated runways	0,00	1,00
38	154	71.2.13	Contaminated runways	0,00	1,00
39	65	71.2.13.4	Procedures	0,00	1,00
40	67	71.2.13.4	Procedures	1,00	1,00
Total:45%				18,00	40,00

Attachment 2: List of result by topic

Licence

Date: 15.08.2014

Examinee: Mwakagile, Faraja

Location: Uganda Civil Aviation Authority

Your Result: 18,00 from 40,00 Points (45,00 %)

Topics	Ammount of Questions	Points achieved	Maximum Points	Percent
71. OPERATIONAL PROCEDURES	40	18,00	40,00	45,00
71.1. GENERAL REQUIREMENTS	6	5,00	6,00	83,33
71.2. SPECIAL OPERATIONAL PROCEDURES	31	12,00	31,00	38,71
Total	40	18,00	40,00	45,00

1

Which incident would require that the nearest Flight Control Center field office be notified immediately?

- ☒ **In-flight fire.**
- ☐ **Fire of the primary aircraft while in a hangar which results in damage to other property of more than \$25,000.**
- ☐ **Ground fire resulting in fire equipment dispatch.**

2

How does the wake turbulence vortex circulate around each wingtip?

- ☐ Outward, upward, and around each tip.
- ☐ Inward, upward, and counterclockwise.
- ☒ Inward, upward, and around each tip.

Candidate: Faraja Mwakagire
Date of birth: 1979-07-27

Subject: 070-Operational procedures
Date: 2014-08-15



3

(Refer to Figure 126.) Which altitude (box 1) is applicable to the vertical extent of the inner and outer circles (now called surface and shelf areas)?

☐ 4,000 feet above airport.

☒ 3,000 feet above airport.

☐ 3,000 feet AGL.

See Attachments:

1. atp_126.jpg

Figure 126

(Attachment
No.1)

4

Among the EAC states, the CAA-OPS of Aircraft is based on :

- ☒ ICAO Annex 6
- ☐ A CAA guideline
- ☐ The Civil Aviation Requirements (CAA)
- ☐ The air transport rules

5

The master minimum equipment list (M MEL) is established by:

- ☐ the operator of the aircraft, and accepted by the manufacturer
- ☐ the operator of the aircraft, and accepted by the authority
- ☐ the manufacturer of the aircraft, but need not to be accepted by the authority
- ☒ the manufacturer of the aircraft, and accepted by the authority

6

According to Annex 6, what is the definition of an Air Operator Certificate?

- ☐ A certificate automatically authorising an operator to carry out domestic air services in any ICAO contracting State.
- ☒ A certificate authorising an operator to carry out specified commercial air transport operations.
- ☐ A certificate the crew will present to immigration officers, stating that all passengers on board fulfil the visa requirements needed.
- ☐ A certificate needed to carry out specified commercial international air transport operations, but not for domestic commercial flights.

7

According to civil aviation regulations, an aeroplane whose maximum approved passenger seating configuration is 10 seats must be equipped with:

- ☒ one hand fire-extinguisher on the flight deck and two hand fire-extinguishers in the passenger compartment.
- ☐ two hand fire-extinguishers on the flight deck and two hand fire-extinguishers in the passenger compartment.
- ☐ three hand fire-extinguishers in the passenger compartment.
- ☐ one hand fire-extinguisher on the flight deck and one hand fire-extinguisher in the passenger compartment.

8

What emergency equipment is required for extended overwater operations?

- ☐ A pyrotechnic signaling device for each life preserver.
- ☒ A life jacket equipped with a survivor locator light, for each person on the airplane.
- ☐ A portable survival emergency locator transmitter for each liferaft.

9

Each large aircraft operating over water must have a life preserver for each

- ☒ aircraft occupant.
- ☐ passenger seat, plus 10 percent.
- ☐ seat on the aircraft.

10

When a supplemental air carrier is operating over an uninhabited area, how many appropriately equipped survival kits are required aboard the aircraft?

- ☐ One for each passenger, plus 10 percent.
- ☒ One for each occupant of the aircraft.
- ☐ One for each passenger seat.

11

Information concerning evacuation procedures can be found in the :

- ☐ flight manual.
- ☒ operation manual.
- ☐ operational flight plan.
- ☐ journey logbook.

12

Following an emergency landing which will need an evacuation from the aircraft?
1 - remain on the runway,
2 - clear the runway using the first available taxiway,
3 - keep one engine or the APU running in order to maintain the electrical power supply on,
4 - turn off all systems.

☐ 2,4.

☐ 1,3.

☒ 2,3.

☐ 1,4.

13

During an explosive decompression at flight level 370 (FL 370), your first action will be :

- ☒ to put on the oxygen mask
- ☐ to comfort your passengers
- ☐ to warn the ATC
- ☐ to set the transponder to 7700

14

The Civil Aviation Regulations establishes that, a co-pilot is not assigned to operate at the flight controls during take-off and landing unless :

- ☐ he has carried out at least three flights as pilot-in-command or as a co-pilot at the controls of the type to be used, in the preceding 90 days.
- ☐ he has carried out as pilot-in-command or as co-pilot at least three take-off and three landings in an aeroplane or an approved flight simulator of the type used, in the preceding 90 days.
- ☐ he has carried out as-pilot-in-command or as co-pilot at least three take-off and three landings in an aeroplane or an approved flight simulator of the type used, in the preceding 30 days
- ☒ he has operated as pilot-in-command or as co-pilot at the controls during take-off and landing of the type to be used in the preceding 90 days.

15

Selecting an alternate aerodrome the runway of this facility must be sufficiently long to allow a full stop landing from 50 ft above the threshold (jet type aircraft, dry runway) within:

- ☐ 50% of the landing distance available.
- ☐ 60% of the landing distance available.
- ☒ 80% of the landing distance available.
- ☐ 70% of the landing distance available.

16

Flight crew members on the flight deck shall keep their safety belt fastened:

- ☐ while at their station.
- ☒ only during take off and landing and whenever necessary by the commander in the interest of safety.
- ☐ only during take off and landing.
- ☐ from take off to landing.

17

After a landing, with overweight and overspeed conditions, the tyres and brakes are extremely hot. The fireguards should approach the landing gear tyres:

- ☐ under no circumstances.
- ☒ from any side.
- ☐ only from left or right side.
- ☐ only from front or rear side.

18

For aircraft certified , cockpit voice recorder must keep the conversations and sound alarms recorded during the last :

- ☐ 25 hours of operation.
- ☐ 48 hours of operation.
- ☒ flight.
- ☐ 30 minutes of operation.

19

Life preservers required for overwater operations are stored

- ☐ under each occupant seat.
- ☒ within easy reach of each seated occupant.
- ☐ within easy reach of each passenger.

20

The maximum validity of a SNOWTAM is :

☐ 12 hours

☒ 24 hours

☐ 3 hours

☐ 6 hours

21

The greatest possibility of ice buildup, while flying under icing conditions, occurs on :

- ☐ The upper and lower wingsurfaces.
- ☐ Only the pitot and static probes.
- ☒ The aircraft front areas.
- ☐ The upper and lower rudder surfaces.

22

An aircraft having undergone an anti-icing procedure must be anti-icing fluid free at the latest when :

- ☐ releasing the brakes in order to take-off.
- ☒ leaving the icing zone.
- ☐ it is rotating (before taking-off).
- ☐ it is implementing its own anti-icing devices.

23

To extinguish a fire in the cockpit, you use:

- 1. a water fire-extinguisher*
- 2. a powder or chemical fire-extinguisher*
- 3. a halon fire-extinguisher*
- 4. a CO2 fire-extinguisher*

☐ 1, 2, 3, 4

☒ 2, 3, 4

☐ 3, 4

☐ 1, 2

24

An aircraft having undertaken an anti-icing procedure and having exceeded the holdover time of the anti-icing fluid:

- ☒ **must only undertake a de-icing procedure before take-off.**
- ☐ **must undertake a de-icing procedure before a new application of anti-icing fluid before take-off.**
- ☐ **does not require a new anti-icing procedure before take-off.**
- ☐ **must only undertake a new anti-icing procedure before take-off.**

25

A CO2 fire extinguisher can be used for:

- 1. a paper fire*
- 2. a hydrocarbon fire*
- 3. a fabric fire*
- 4. an electrical fire*
- 5. a wood fire*

The combination regrouping all the correct statements

☐ 2, 3, 4

☐ 1, 2, 3, 4, 5

☐ 2, 4, 5

☒ 1, 3, 5

26

The fire extinguisher types which may be used on class B fires are:

- 1 - H₂O,
- 2 - CO₂,
- 3 - dry-chemical,
- 4 - halogen

☐ 3 - 4

☒ 2

☐ 1 - 2 - 3 - 4,

☐ 2 - 3 - 4

27

In final approach, you encounter a strong rear wind gust or strong down wind which forces you to go around. You

1- maintain the same aircraft configuration (gear and flaps)

2- reduce the drags (gear and flaps)

3- gradually increase the attitude up to triggering of stick shaker

4- avoid excessive attitude change The combination of correct statements is :

☐ 1,3

☒ 1,4

☐ 2,4

☐ 2,3

28

Which one of the following magnitudes will be the first to change its value when penetrating a windshear ?

- ☐ Pitch angle.
- ☐ Groundspeed.
- ☒ Indicated airspeed.
- ☐ Vertical speed.

29

The greatest wake turbulence occurs when the generating aircraft is :

- ☐ Small, light, at maximum speed in full flaps configuration
- ☐ Small, light, at low speed in clean configuration
- ☒ Large, heavy, at maximum speed in full flaps configuration
- ☐ Large, heavy, at low speed in clean configuration

30

When taking-off after a widebody aircraft which has just landed, you should take-off :

- ☐ at the point where the aircraft's wheels have touched down and on the wind side of the runway .
- ☐ beyond the point where the aircraft's wheels have touched down.
- ☒ in front of the point where the aircraft's wheels have touched down.
- ☐ at the point where the aircraft's wheels have touched the ground and on the underwind side of the runway .

31

Aeroplane wake turbulence during take off starts when:

- ☒ the take off roll commences.
- ☐ out of ground effect.
- ☐ the nose wheel lifts off the runway.
- ☐ slats and flaps are extended only.

32

According to ICAO Annex 17, following an unlawful interference, who shall take adequate measures for the safety of passengers and crew of an aircraft, until their journey can be continued?

- ☐ The contracting State where the aircraft is located.
- ☐ The commander of the aircraft.
- ☒ The aircraft's operator.
- ☐ The responsible Civil Aviation Authority

33

In compliance with the civil aviation regulations in order to carry dangerous goods on board a public transport airplane, they must be accompanied with a :

- ☐ representative of the company owning the materials.
- ☐ system to warn the crew in case of a leak or of an abnormal
- ☒ transport document for dangerous goods.
- ☐ specialized handling employee.

34

Who makes sure that the air transportation of an item of dangerous goods is not prohibited?

- ☐ It is not specified.
- ☐ The captain, always using the list of prohibited aircraft items.
- ☒ The shipper when completing the shipper's declaration for dangerous goods.
- ☐ The operator.

35

In the hazardous materials transportation act, the freight compliance with the regulatory arrangements is the responsibility of the :

☐ aerodrome manager.

☒ captain.

☐ sender.

☐ station manager.

36

In addition to the languages required by the State of Origin, what language should be set for the markings related to dangerous goods :

☐ French

☒ English

☐ English, French or Spanish

☐ Spanish

37

For an airplane with a tyre pressure of 12 bars, there is a risk of dynamic hydroplaning as soon as the :

1- water height is equal to the depth of the tyre grooves.

2- speed is greater than 114 kt.

3- water height is equal to the half of the depth of the tyre grooves.

4- speed is greater than 83 kt.

The combination regrouping all the correct statements is :

☐ 1 and 2.

☐ 1 and 4.

☐ 3 and 4.

☒ 2 and 3.

38

According to the civil aviation regulations a runway is considered damp when:

- ☒ it is covered with a film of water of less than 3 mm.
- ☐ its surface is not dry, and when surface moisture does not give it a shiny appearance.
- ☐ surface moisture gives it a shiny appearance.
- ☐ it is covered with a film of water of less than 1 mm.

39

For an airplane with a tyre pressure of 14 bars, there is a risk of dynamic hydroplaning as soon as the :

1- water height is equal to the depth of the tyre grooves.

2- speed is greater than 123 kt.

3- water height is equal to the half of the depth of the tyre grooves.

4- speed is greater than 95 kt. The combination regrouping all the correct statements is:

☐ 1 and 4.

☒ 2 and 3.

☐ 3 and 4.

☐ 1 and 2.

40

In case of landing on a flooded runway and in heavy rain:

1. you increase your approach speed,
2. you land firmly in order to obtain a firm contact of the wheels with the runway and immediately land your nose gear,
3. you decrease your approach speed,
4. you use systematically all the lift dumper devices,
5. you land as smoothly as possible,
6. you brake energetically.

The combination regrouping all the correct statements is:

- ☒ 1, 2, 4
- ☐ 2, 3, 4
- ☐ 1, 4, 5, 6
- ☐ 3, 5


Attachment No. 1

Questions 3

Figure 126

atp_126.jpg

Class C Airspace

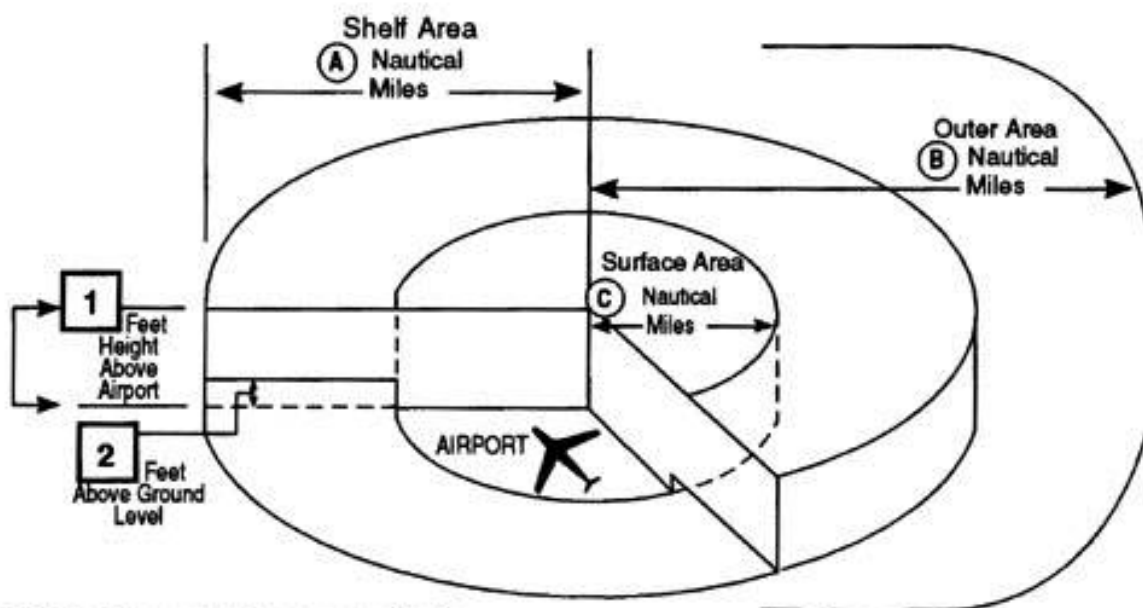

Services upon establishing two-way radio communication and radar contact:

Sequencing Arrivals

IFR/VFR Standard Separation

IFR/VFR Traffic Advisories and Conflict Resolution

VFR/VFR Traffic Advisories

IFR: Instrument Flight Rules
VFR: Visual Flight Rules

Figure 126. Class C Airspace © ASA