

Online Examination Report

Date:	21.07.2014
Attempts:	1
Examinee:	ATIALUK, Joseph
Date of birth:	12/24/1987
Subject:	070-Operational Procedures
Result:	27,5 %
Time used:	00:00:12 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	186	71. OPERATIONAL PROCEDURES		1,00	1,00
2	175	71. OPERATIONAL PROCEDURES		0,00	1,00
3	191	71. OPERATIONAL PROCEDURES		1,00	1,00
4	174	71. OPERATIONAL PROCEDURES		1,00	1,00
5	56	71.1.1 ICAO Annex 6		1,00	1,00
6	118	71.1.1.3 General		0,00	1,00
7	19	71.1.1.3 General		0,00	1,00
8	149	71.1.1.3 General		0,00	1,00
9	167	71.1.3.2 Transoceanic and polar flight		1,00	1,00
10	100	71.2.1 Operations Manual		0,00	1,00
11	107	71.2.1.1 Operating procedures		0,00	1,00
12	112	71.2.1.1 Operating procedures		1,00	1,00
13	34	71.2.1.1 Operating procedures		0,00	1,00
14	148	71.2.2 Icing conditions		0,00	1,00
15	3	71.2.2 Icing conditions		0,00	1,00
16	114	71.2.2.1 On ground de-/anti-icing		0,00	1,00
17	115	71.2.2.1 On ground de-/anti-icing		0,00	1,00
18	143	71.2.2.1 On ground de-/anti-icing		0,00	1,00
19	140	71.2.2.1 On ground de-/anti-icing		0,00	1,00
20	144	71.2.4.2 Influence of the flight procedure		0,00	1,00
21	119	71.2.5 Fire/smoke		0,00	1,00
22	102	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
23	89	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
24	117	71.2.5.3 Fire in the cabin, cockpit, cargo comp		0,00	1,00
25	87	71.2.5.6 Types of extinguishers		0,00	1,00
26	131	71.2.5.6 Types of extinguishers		0,00	1,00
27	16	71.2.5.6 Types of extinguishers		0,00	1,00
28	141	71.2.5.6 Types of extinguishers		0,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
29	11	71.2.7	Wind shear and microburst	0,00	1,00
30	62	71.2.7	Wind shear and microburst	0,00	1,00
31	78	71.2.7.1	Effects and recognition	0,00	1,00
32	166	71.2.8	Wake turbulence	0,00	1,00
33	51	71.2.8	Wake turbulence	0,00	1,00
34	162	71.2.8	Wake turbulence	1,00	1,00
35	38	71.2.8.2	List of relevant parameters	1,00	1,00
36	79	71.2.9	Security (unlawful events)	1,00	1,00
37	111	71.2.12	Transport of dangerous goods	1,00	1,00
38	97	71.2.12.1	ICAO Annex 18	0,00	1,00
39	154	71.2.13	Contaminated runways	0,00	1,00
40	67	71.2.13.4	Procedures	1,00	1,00
Total:28%				11,00	40,00

Attachment 2: List of result by topic

Licence

Date: 16.07.2014

Examinee: ATIALUK, Joseph

Location: Uganda Civil Aviation Authority

Your Result: 11,00 from 40,00 Points (27,50 %)

Topics	Ammount of Questions	Points achieved	Maximum Points	Percent
71. OPERATIONAL PROCEDURES	40	11,00	40,00	27,50
71.1. GENERAL REQUIREMENTS	5	2,00	5,00	40,00
71.2. SPECIAL OPERATIONAL PROCEDURES	31	6,00	31,00	19,35
Total	40	11,00	40,00	27,50

1

Which is a necessary condition for the occurrence of a low-level temperature inversion wind shear?

- ☒ A calm or light wind near the surface and a relatively strong wind just above the inversion.
- ☐ The temperature differential between the cold and warm layers must be at least 10 degrees C.
- ☐ A wind direction difference of at least 30 degrees C between the wind near the surface and the wind just above the inversion.

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16



2

(Refer to Figure 126.) Which altitude (box 1) is applicable to the vertical extent of the inner and outer circles (now called surface and shelf areas)?

☒ 3,000 feet AGL.

☐ 4,000 feet above airport.

☐ 3,000 feet above airport.

See Attachments:

1. atp_126.jpg

Figure 126

(Attachment
No.1)

3

When landing behind a large jet aircraft, at which point on the runway should you plan to land?

- ☐ At least 1,000 feet beyond the jet's touchdown point.
- ☐ If any crosswind, land on the windward side of the runway and prior to the jet's touchdown point.
- ☒ Beyond the jet's touchdown point.

4

Which incident would require that the nearest Flight Control Center field office be notified immediately?

- ☐ Fire of the primary aircraft while in a hangar which results in damage to other property of more than \$25,000.
- ☐ Ground fire resulting in fire equipment dispatch.
- ☒ In-flight fire.

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16

5

Among the EAC states, the CAA-OPS of Aircraft is based on :

☐ The Civil Aviation Requirements (CAA)

☒ ICAO Annex 6

☐ The air transport rules

☐ A CAA guideline

6

90 % of bird strikes occur :

☐ between 500 and 1 500 m

☐ above 1 000 m

☒ between 500 and 1 000 m

☐ under 500 m

7

During a night flight, an observer located in the cockpit, seeing an aircraft coming from front right on approximate opposite parallel track, will first see the:

☒ red light

☐ red and white flashing light

☐ white light

☐ green light

8

Which one of the following sets of conditions is most likely to attract birds to an aerodrome ?

- ☐ a modern sewage tip in close proximity
- ☐ the extraction of minerals such as sand and gravel
- ☒ mowing and maintaining the grass long
- ☐ a refuse tip in close proximity

9

What emergency equipment is required for extended overwater operations?

- ☐ A portable survival emergency locator transmitter for each liferaft.
- ☒ A life jacket equipped with a survivor locator light, for each person on the airplane.
- ☐ A pyrotechnic signaling device for each life preserver.

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16

10

Information concerning evacuation procedures can be found in the :

☐ operational flight plan.

☒ flight manual.

☐ journey logbook.

☐ operation manual.

11

For aircraft certified , cockpit voice recorder must keep the conversations and sound alarms recorded during the last :

- ☐ 48 hours of operation.
- ☐ 30 minutes of operation.
- ☒ flight.
- ☐ 25 hours of operation.

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16



12

A life jacket is mandatory for any passenger on board an aircraft flying away from the shore by more than :

☐ 400 NM

☐ 100 NM

☐ 200 NM

☒ 50 NM

13

Flight crew members on the flight deck shall keep their safety belt fastened:

- ☐ only during take off and landing and whenever necessary by the commander in the interest of safety.
- ☒ from take off to landing.
- ☐ only during take off and landing.
- ☐ while at their station.

14

The greatest possibility of ice buildup, while flying under icing conditions, occurs on :

☐ The upper and lower rudder surfaces.

☒ The upper and lower wingsurfaces.

☐ The aircraft front areas.

☐ Only the pitot and static probes.

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16



15

The maximum validity of a SNOWTAM is :

☐ 3 hours

☒ 12 hours

☐ 6 hours

☐ 24 hours

16

The anti-icing fluid protecting film can wear off and reduce considerably the protection time:

- ☐ when the airplane is into the wind.
- ☐ during strong winds or as a result of the other aircraft engines jet wash.
- ☒ when the temperature of the airplane skin is close to 0 °C.
- ☐ when the outside temperature is close to 0 °C.

17

During an aircraft de-icing/anti-icing procedure:

- ☐ the anti-icing and de-icing fluids are applied hot.
- ☒ the de-icing fluid is applied without heating and the anti-icing fluid is applied hot.
- ☐ the anti-icing fluid is applied without heating and the de-icing fluid is applied hot.
- ☐ the anti-icing and de-icing fluids are applied cold.

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16



18

For a given ambient temperature and type of de-icing fluid used, in which one of the following types of weather condition will the holdover (protection) time be shortest ?

☒ Steady snow

☐ Frost

☐ Freezing fog

☐ Freezing rain

19

An aircraft having undergone an anti-icing procedure and having exceeded the protection time of the anti-icing fluid:

- ☐ must only undergo a new anti-icing procedure for take-off.
- ☒ must only undergo a de-icing procedure for take-off.
- ☐ must undergo a de-icing procedure before a new application of anti-icing fluid for take-off.
- ☐ need not to undergo a new anti-icing procedure for take-off.

20

As regards the detection of bird strike hazard, the pilot's means of information and prevention are:

1 - ATIS.

2 - NOTAMs.

3- BIRDTAMs.

4 - Weather radar.,

☒ 1,3,4

☐ 1,2,3,4,5

☐ 1,2,5

☐ 2,5

21

The "NO SMOKING" sign must be illuminated :

- ☐ during climb and descent.
- ☐ during take off and landing.
- ☒ when oxygen is being supplied in the cabin.
- ☒ in each cabin section if oxygen is being carried.

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16



22

If smoke appears in the air conditioning, the first action to take is to :

☐ Determine which system is causing the smoke.

☐ Put on the mask and goggles.

☒ Begin an emergency descent.

☐ Cut off all air conditioning units.

23

In case of a fire due to the heating of the brakes, you fight the fire using:

1. a dry powder fire extinguisher

2. a water spray atomizer

3. a water fire-extinguisher

4. a CO2 fire-extinguisher to the maximum

The combination regrouping all the correct statements is:

☐ 1, 4

☒ 2, 3, 4

☐ 1, 2

☐ 3, 4

24

To extinguish a fire in the cockpit, you use:

- 1. a water fire-extinguisher*
- 2. a powder or chemical fire-extinguisher*
- 3. a halon fire-extinguisher*
- 4. a CO2 fire-extinguisher*

☐ 1, 2

☐ 1, 2, 3, 4

☐ 3, 4

☒ 2, 3, 4

25

CO2 type extinguishers are fit to fight:

1 - class A fires

2 - class B fires

3 - electrical source fires

4 - special fires: metals, gas, chemical product

Which of the following combinations contains all the correct statements:

☒ **1 - 3 - 4**

☐ **1 - 2 - 4**

☐ **1 - 2 - 3**

☐ **2 - 3 - 4**

26

You will use a halon extinguisher for a fire of:

1 - solids (fabric, plastic, ...)

2 - liquids (alcohol, gasoline, ...)

3 - gas

4 - metals (aluminium, magnesium, ...)

The combination regrouping all the correct statements

☐ 2,3,4

☐ 1,2,3

☐ 1,2,3,4

☒ 1,2,4

27

You will use a CO2 fire-extinguisher for :

- 1. a paper fire*
- 2. a plastic fire*
- 3. a hydrocarbon fire*
- 4. an electrical fire*

The combination regrouping all the correct statements is:

☐ 1,2,3

☒ 1,2,3,4

☐ 2,3

☒ 3,4

28

A fire occurs in a wheel and immediate action is required to extinguish it. The safest extinguishant to use is :

☒ CO2 (carbon dioxide)

☐ water

☐ dry powder

☐ foam

29

One of the main characteristics of windshear is that it :

- ☒ occurs only at a low altitude (2000 ft) and never in the vertical plane
- ☐ occurs only at a low altitude (2000 ft) and never in the horizontal plane
- ☐ can occur at any altitude in both the vertical and horizontal planes
- ☐ can occur at any altitude and only in the horizontal plane

30

In final approach, you encounter a strong rear wind gust or strong down wind which forces you to go around. You

1- maintain the same aircraft configuration (gear and flaps)

2- reduce the drags (gear and flaps)

3- gradually increase the attitude up to triggering of stick shaker

4- avoid excessive attitude change The combination of correct statements is :

☒ 2,3

☐ 1,3

☐ 1,4

☐ 2,4

31

During a manual approach, the aeroplane is subjected to windshear with an increasing tail wind. In the absence of a pilot action, the aeroplane:

- 1- flies above the intended approach path
- 2- flies below the intended approach path
- 3- has an increasing true airspeed
- 4- has a decreasing true airspeed

The combination of correct statements is:

☐ 2, 3.

☐ 1, 4.

☐ 2, 4.

☒ 1, 3.

32

When taking-off after a widebody aircraft which has just landed, you should take-off :

- ☐ at the point where the aircraft's wheels have touched the ground and on the underwind side of the runway .
- ☐ at the point where the aircraft's wheels have touched down and on the wind side of the runway .
- ☒ in front of the point where the aircraft's wheels have touched down.
- ☐ beyond the point where the aircraft's wheels have touched down.

33

According with DOC 4444 (ICAO), a wake turbulence radar separation minima of 9,3 Km (5,0 NM) shall be applied when a :

- ☒ **LIGHT aircraft is crossing behind a HEAVY aircraft, at the same altitude or less than 300 m (1 000 ft)**
- ☐ **HEAVY aircraft is crossing behind a HEAVY aircraft, at the same altitude or less than 300 m (1 000 ft)**
- ☐ **LIGHT aircraft is crossing behind a MEDIUM aircraft, at the same altitude or less than 300 m (1 000.ft)**
- ☐ **MEDIUM aircraft is crossing behind a MEDIUM aircraft, at the same altitude or less than 300 n (1 000 ft)**

34

The greatest wake turbulence occurs when the generating aircraft is :

- ☐ Large, heavy, at maximum speed in full flaps configuration
- ☐ Small, light, at maximum speed in full flaps configuration
- ☒ Large, heavy, at low speed in clean configuration
- ☐ Small, light, at low speed in clean configuration

35

The greatest wake turbulence occurs when the generating aircraft is:

- ☐ Small, light, at maximum speed in full flaps configuration
- ☒ Large, heavy, at low speed in clean configuration
- ☐ Small, light, at low speed in clean configuration
- ☐ Large, heavy, at maximum speed in full flaps configuration

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16

36

What transponder code should be used to provide recognition of an aircraft which is being subjected to unlawful interference :

☐ code 2000

☐ code 7600

☐ code 7700

☒ code 7500

37

ICAO (International Civil Aviation Organization) Appendix 18 is a document dealing with

:

☒ the safety of the air transport of dangerous goods

☐ the technical operational use of aircraft

☐ the noise pollution of aircraft

☐ the air transport of live animals

Candidate: Joseph ATIALUK
Date of birth: 1987-12-24

Subject: 070-Operational Procedures
Date: 2014-07-16



38

In addition to the languages required by the State of Origin, what language should be set for the markings related to dangerous goods :

☒ English, French or Spanish

☐ French

☐ Spanish

☐ English

39

According to the civil aviation regulations a runway is considered damp when:

- ☐ it is covered with a film of water of less than 1 mm.
- ☒ it is covered with a film of water of less than 3 mm.
- ☐ surface moisture gives it a shiny appearance.
- ☒ its surface is not dry, and when surface moisture does not give it a shiny appearance.

40

In case of landing on a flooded runway and in heavy rain:

1. you increase your approach speed,
2. you land firmly in order to obtain a firm contact of the wheels with the runway and immediately land your nose gear,
3. you decrease your approach speed,
4. you use systematically all the lift dumper devices,
5. you land as smoothly as possible,
6. you brake energetically.

The combination regrouping all the correct statements is:

☐ 3, 5

☐ 1, 4, 5, 6

☐ 2, 3, 4

☒ 1, 2, 4


Attachment No. 1

Questions 2

Figure 126

atp_126.jpg

Class C Airspace

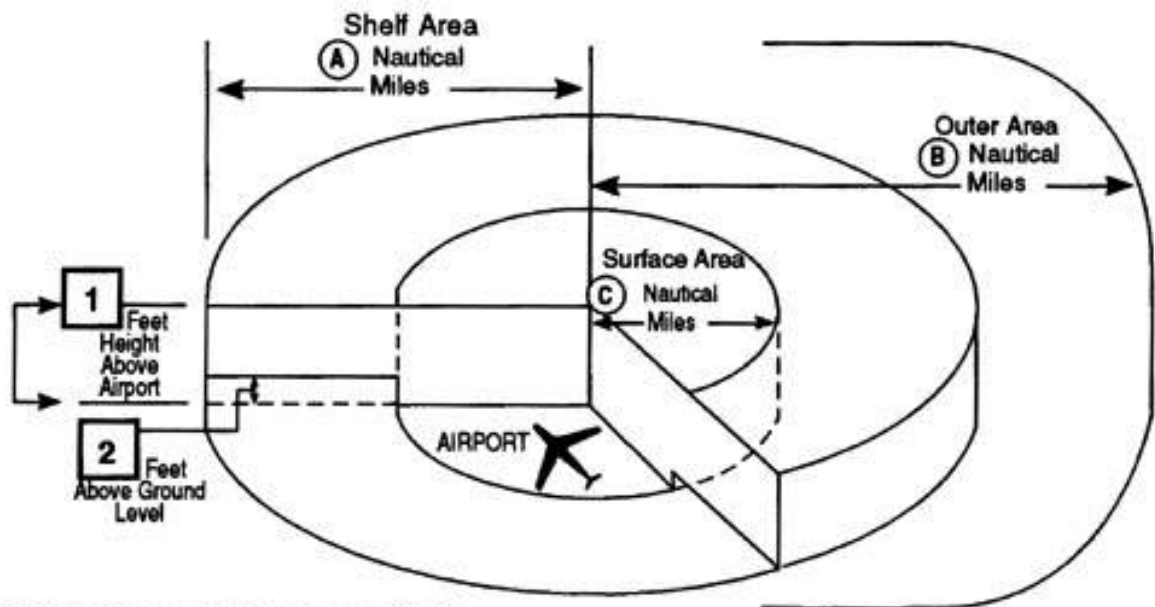

Services upon establishing two-way radio communication and radar contact:

Sequencing Arrivals

IFR/VFR Standard Separation

IFR/VFR Traffic Advisories and Conflict Resolution

VFR/VFR Traffic Advisories

IFR: Instrument Flight Rules
VFR: Visual Flight Rules

Figure 126. Class C Airspace © ASA

