
Online Examination Report

Date:	18.07.2014
Attempts:	1
Examinee:	Ekwee, Simon 2
Date of birth:	8/29/1987
Subject:	070-Operational procedures
Result:	40 %
Time used:	00:40:20 (HH:MM:SS)

Attachments

1. List of result by question
2. List of result by topic
3. Detailed question result report

Attachment 1: List of result by question

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
1	192	71. OPERATIONAL PROCEDURES		1,00	1,00
2	174	71. OPERATIONAL PROCEDURES		1,00	1,00
3	185	71. OPERATIONAL PROCEDURES		0,00	1,00
4	184	71. OPERATIONAL PROCEDURES		0,00	1,00
5	175	71. OPERATIONAL PROCEDURES		0,00	1,00
6	190	71. OPERATIONAL PROCEDURES		0,00	1,00
7	180	71. OPERATIONAL PROCEDURES		0,00	1,00
8	179	71. OPERATIONAL PROCEDURES		0,00	1,00
9	56	71.1.1 ICAO Annex 6		1,00	1,00
10	25	71.1.1 ICAO Annex 6		0,00	1,00
11	173	71.1.2 Civil Aviation Regulations		1,00	1,00
12	24	71.1.2.6 Civil Aviation Regulations		1,00	1,00
13	168	71.1.3.2 Transoceanic and polar flight		0,00	1,00
14	40	71.1.3.3 MNPS Airspace		0,00	1,00
15	53	71.1.3.3 MNPS Airspace		1,00	1,00
16	52	71.1.3.3 MNPS Airspace		1,00	1,00
17	90	71.2.1 Operations Manual		1,00	1,00
18	160	71.2.1.1 Operating procedures		0,00	1,00
19	123	71.2.1.1 Operating procedures		0,00	1,00
20	112	71.2.1.1 Operating procedures		1,00	1,00
21	145	71.2.1.1 Operating procedures		1,00	1,00
22	20	71.2.1.1 Operating procedures		1,00	1,00
23	139	71.2.1.1 Operating procedures		1,00	1,00
24	138	71.2.1.1 Operating procedures		0,00	1,00
25	34	71.2.1.1 Operating procedures		0,00	1,00
26	3	71.2.2 Icing conditions		0,00	1,00
27	124	71.2.2.1 On ground de-/anti-icing		0,00	1,00
28	115	71.2.2.1 On ground de-/anti-icing		0,00	1,00

CQB Number	Internal Number	Syllabus reference	Chapter	Points	Max. Points
29	144	71.2.4.2	Influence of the flight procedure	0,00	1,00
30	117	71.2.5.3	Fire in the cabin, cockpit, cargo comp	0,00	1,00
31	37	71.2.5.3	Fire in the cabin, cockpit, cargo comp	1,00	1,00
32	5	71.2.5.6	Types of extinguishers	1,00	1,00
33	134	71.2.5.6	Types of extinguishers	0,00	1,00
34	131	71.2.5.6	Types of extinguishers	1,00	1,00
35	6	71.2.7	Wind shear and microburst	0,00	1,00
36	38	71.2.8.2	List of relevant parameters	0,00	1,00
37	79	71.2.9	Security (unlawful events)	0,00	1,00
38	9	71.2.12	Transport of dangerous goods	1,00	1,00
39	165	71.2.12	Transport of dangerous goods	0,00	1,00
40	70	71.2.13	Contaminated runways	0,00	1,00
Total:40%				16,00	40,00

Attachment 2: List of result by topic

Licence

Date: 18.07.2014

Examinee: Ekwee, Simon 2

Location: Uganda Civil Aviation Authority

Your Result: 16,00 from 40,00 Points (40,00 %)

Topics	Ammount of Questions	Points achieved	Maximum Points	Percent
71. OPERATIONAL PROCEDURES	40	16,00	40,00	40,00
71.1. GENERAL REQUIREMENTS	8	5,00	8,00	62,50
71.2. SPECIAL OPERATIONAL PROCEDURES	24	9,00	24,00	37,50
Total	40	16,00	40,00	40,00

1

Where may you use a surveillance approach?

- ☐ At any airport which has radar service.
- ☐ At any airport that has an approach control.
- ☒ At airports for which civil radar instrument approach minimums have been published.

2

Which incident would require that the nearest Flight Control Center field office be notified immediately?

- ☒ In-flight fire.
- ☐ Fire of the primary aircraft while in a hangar which results in damage to other property of more than \$25,000.
- ☐ Ground fire resulting in fire equipment dispatch.

3

How does the wake turbulence vortex circulate around each wingtip?

- ☐ Outward, upward, and around each tip.
- ☒ Inward, upward, and counterclockwise.
- ☐ Inward, upward, and around each tip.

4

When diverting to an alternate airport because of an emergency, pilots should

- ☐ rely upon radio as the primary method of navigation.
- ☐ apply rule-of-thumb computations, estimates, and other appropriate shortcuts to divert to the new course as soon as possible.
- ☒ complete all plotting, measuring, and computations involved before diverting.

Candidate: Simon 2 Ekwee
Date of birth: 1987-08-29

Subject: 070-Operational procedures
Date: 2014-07-18



5

(Refer to Figure 126.) Which altitude (box 1) is applicable to the vertical extent of the inner and outer circles (now called surface and shelf areas)?

☐ 4,000 feet above airport.

☒ 3,000 feet above airport.

☐ 3,000 feet AGL.

See Attachments:

1. atp_126.jpg

Figure 126

(Attachment
No.1)

6

What effect would a light crosswind of approximately 7 knots have on vortex behavior?

- ☒ The downwind vortex would tend to remain over the runway.
- ☐ The upwind vortex would tend to remain over the runway.
- ☐ The light crosswind would rapidly dissipate vortex strength.

7

What aural and visual indications should be observed over an ILS outer marker?

- ☐ Alternate dots and dashes at the rate of two per second.
- ☐ Continuous dashes at the rate of two per second.
- ☒ Continuous dots at the rate of six per second.

8

What aural and visual indications should be observed over an ILS middle marker?

- ☒ Continuous dots at the rate of six per second.
- ☐ Alternate dots and dashes at the rate of two per second.
- ☐ Continuous dashes at the rate of two per second.

9

Among the EAC states, the CAA-OPS of Aircraft is based on :

- ☒ ICAO Annex 6
- ☐ A CAA guideline
- ☐ The Civil Aviation Requirements (CAA)
- ☐ The air transport rules

10

The master minimum equipment list (M MEL) is established by:

- ☒ the operator of the aircraft, and accepted by the manufacturer
- ☐ the operator of the aircraft, and accepted by the authority
- ☐ the manufacturer of the aircraft, but need not to be accepted by the authority
- ☐ the manufacturer of the aircraft, and accepted by the authority

11

An airplane operated by a commercial operator flying over uninhabited terrain must carry which emergency equipment?

- ☐ Survival kit for each passenger.
- ☒ An approved survival-type emergency locator transmitter.
- ☐ A signal mirror and colored smoke flares.

12

In accordance with civil aviation regulations, for aeroplanes intended to be operated at pressure altitude of 39000 ft, the total number of oxygen dispensing units and outlets shall exceed:

- ☐ the number of passengers.
- ☐ the number of seats.
- ☒ the number of seats by at least 10%.
- ☐ the number of passengers by at least 10%.

13

Each large aircraft operating over water must have a life preserver for each

- ☐ aircraft occupant.
- ☒ passenger seat, plus 10 percent.
- ☐ seat on the aircraft.

14

Air traffic services may require an aircraft to report position when flying east-west, south of 70°N between 5°W and 65°W, every:

☐ 20° of longitude.

☒ 5° of longitude.

☐ 10° of longitude.

☐ 15° of longitude.

15

In Minimum Navigation Performance Specification (MNPS) airspace, the speed reference for turbo-jet aircraft is the:

- ☐ ground speed.
- ☐ indicated airspeed.
- ☒ Mach number.
- ☐ true airspeed.

16

In the event of communication failure in an Minimum Navigation Performance Specification(MNPS) airspace, the pilot must:

- ☐ change the flight level in accordance with predetermined instructions.
- ☒ continue the flight in compliance with the last oceanic clearance received and acknowledged.
- ☐ join one of the so-called "special" routes.
- ☐ return to the flight plan route if it is different from the last oceanic clearance received and acknowledged.

17

The observations and studies conducted on the behavior of birds on the ground, ahead of an aircraft taking off and having reached an average speed of 135 kt, show that birds fly away :

- ☐ about ten seconds beforehand
- ☐ from the beginning of the takeoff roll
- ☐ as soon as they hear the engines noise
- ☒ about two seconds beforehand

18

During an explosive decompression at flight level 370 (FL 370), your first action will be :

- ☐ to put on the oxygen mask
- ☐ to comfort your passengers
- ☐ to warn the ATC
- ☒ to set the transponder to 7700

19

The Civil Aviation Regulations establishes that, a co-pilot is not assigned to operate at the flight controls during take-off and landing unless :

- ☐ he has carried out at least three flights as pilot-in-command or as a co-pilot at the controls of the type to be used, in the preceding 90 days.
- ☒ he has carried out as pilot-in-command or as co-pilot at least three take-off and three landings in an aeroplane or an approved flight simulator of the type used, in the preceding 90 days.
- ☐ he has carried out as-pilot-in-command or as co-pilot at least three take-off and three landings in an aeroplane or an approved flight simulator of the type used, in the preceding 30 days
- ☐ he has operated as pilot-in-command or as co-pilot at the controls during take-off and landing of the type to be used in the preceding 90 days.

Candidate: Simon 2 Ekwee
Date of birth: 1987-08-29

Subject: 070-Operational procedures
Date: 2014-07-18



20

A life jacket is mandatory for any passenger on board an aircraft flying away from the shore by more than :

☐ 100 NM

☒ 50 NM

☐ 400 NM

☐ 200 NM

21

During a night flight, an observer located in the cockpit, seeing an aircraft coming from the front left, will first see the :

- ☒ green steady light
- ☐ white steady light
- ☐ green flashing light
- ☐ red steady light

22

According to civil aviation regulations in East Africa, the Minimum Equipment List of an aircraft is found in the:

- ☐ flight record.
- ☒ operations manual.
- ☐ flight manual.
- ☐ CAA OPS.

Candidate: Simon 2 Ekwee
Date of birth: 1987-08-29

Subject: 070-Operational procedures
Date: 2014-07-18



23

A category B aircraft can carry out an indirect approach followed by a visual maneuver only if the horizontal visibility is higher than or equal to:

☐ 3600 m

☒ 1600 m

☐ 2400 m

☐ 1500 m

24

On overwater flights, an operator shall not operate an aeroplane at a distance away from land, which is suitable for making an emergency landing greater than that corresponding to :

- ☒ 400 NM or 120 minutes at cruising speed.
- ☐ 200 NM or 45 minutes at cruising speed.
- ☒ 100 NM or 30 minutes at cruising speed.
- ☐ 300 NM or 90 minutes at cruising speed.

25

Flight crew members on the flight deck shall keep their safety belt fastened:

- ☐ while at their station.
- ☒ only during take off and landing and whenever necessary by the commander in the interest of safety.
- ☐ only during take off and landing.
- ☐ from take off to landing.

26

The maximum validity of a SNOWTAM is :

☐ 12 hours

☐ 24 hours

☒ 3 hours

☐ 6 hours

27

If after anti-icing has been completed a pre-departure inspection reveals evidence of freezing, the correct action is to :

- ☐ complete departure as soon as possible to reduce the possibility of further freezing
- ☒ complete departure provided that the recommended anti-icing holdover (protection) time for the prevailing conditons and type of fluid used has not been exceeded
- ☐ carry out a further de-icing process
- ☐ switch on all the aeroplane anti-icing and de-icing systems and leave on until clear of icing conditions when airborne

28

During an aircraft de-icing/anti-icing procedure:

- ☐ the de-icing fluid is applied without heating and the anti-icing fluid is applied hot.
- ☐ the anti-icing fluid is applied without heating and the de-icing fluid is applied hot.
- ☒ the anti-icing and de-icing fluids are applied cold.
- ☐ the anti-icing and de-icing fluids are applied hot.

29

As regards the detection of bird strike hazard, the pilot's means of information and prevention are:

1 - ATIS.

2 - NOTAMs.

3- BIRDTAMs.

4 - Weather radar.,

☐ 1,2,3,4,5

☐ 2,5

☐ 1,2,5

☒ 1,3,4

30

To extinguish a fire in the cockpit, you use:

- 1. a water fire-extinguisher*
- 2. a powder or chemical fire-extinguisher*
- 3. a halon fire-extinguisher*
- 4. a CO2 fire-extinguisher*

☐ 1, 2, 3, 4

☒ 2, 3, 4

☐ 3, 4

☐ 1, 2

31

Beneath fire extinguishers the following equipment for fire fighting is on board:

- ☐ a big bunch of fire extinguishing blankets.
- ☐ water and all type of beverage.
- ☐ a hydraulic winch and a big box of tools.
- ☒ crash axes or crowbars.

32

You will use a powder fire-extinguisher for:

1. a paper fire
2. a plastic fire
3. a hydrocarbon fire
4. an electrical fire

The combination regrouping all the correct statements is:

☐ 1, 2, 3

☐ 1, 4

☐ 2, 3

☒ 1, 2, 3, 4

33

The fire extinguisher types which may be used on class B fires are:

- 1 - H₂O,
- 2 - CO₂,
- 3 - dry-chemical,
- 4 - halogen

☐ 3 - 4

☐ 2

☒ 1 - 2 - 3 - 4,

☐ 2 - 3 - 4

34

You will use a halon extinguisher for a fire of:

1 - solids (fabric, plastic, ...)

2 - liquids (alcohol, gasoline, ...)

3 - gas

4 - metals (aluminium, magnesium, ...)

The combination regrouping all the correct statements

☒ 1,2,3

☐ 1,2,3,4

☐ 1,2,4

☐ 2,3,4

35

Which one of the following magnitudes will be the first to change its value when penetrating a windshear ?

- ☐ Pitch angle.
- ☐ Groundspeed.
- ☐ Indicated airspeed.
- ☒ Vertical speed.

36

The greatest wake turbulence occurs when the generating aircraft is:

- ☒ Large, heavy, at maximum speed in full flaps configuration
- ☐ Small, light, at maximum speed in full flaps configuration
- ☐ Small, light, at low speed in clean configuration
- ☐ Large, heavy, at low speed in clean configuration

Candidate: Simon 2 Ekwee
Date of birth: 1987-08-29

Subject: 070-Operational procedures
Date: 2014-07-18

37

What transponder code should be used to provide recognition of an aircraft which is being subjected to unlawful interference :

☐ code 7600

☒ code 7700

☐ code 7500

☐ code 2000

38

The authorization for the transport of hazardous materials is specified on the:

☐ airworthiness certificate.

☐ insurance certificate.

☐ registration certificate.

☒ air carrier certificate.

39

Who makes sure that the air transportation of an item of dangerous goods is not prohibited?

- ☐ It is not specified.
- ☐ The captain, always using the list of prohibited aircraft items.
- ☐ The shipper when completing the shipper's declaration for dangerous goods.
- ☒ The operator.

40

A braking action of 0.25 and below reported on a SNOWTAM is :

☒ good

☐ medium

☐ unreliable

☐ poor


Attachment No. 1

Questions 5

Figure 126

atp_126.jpg

Class C Airspace

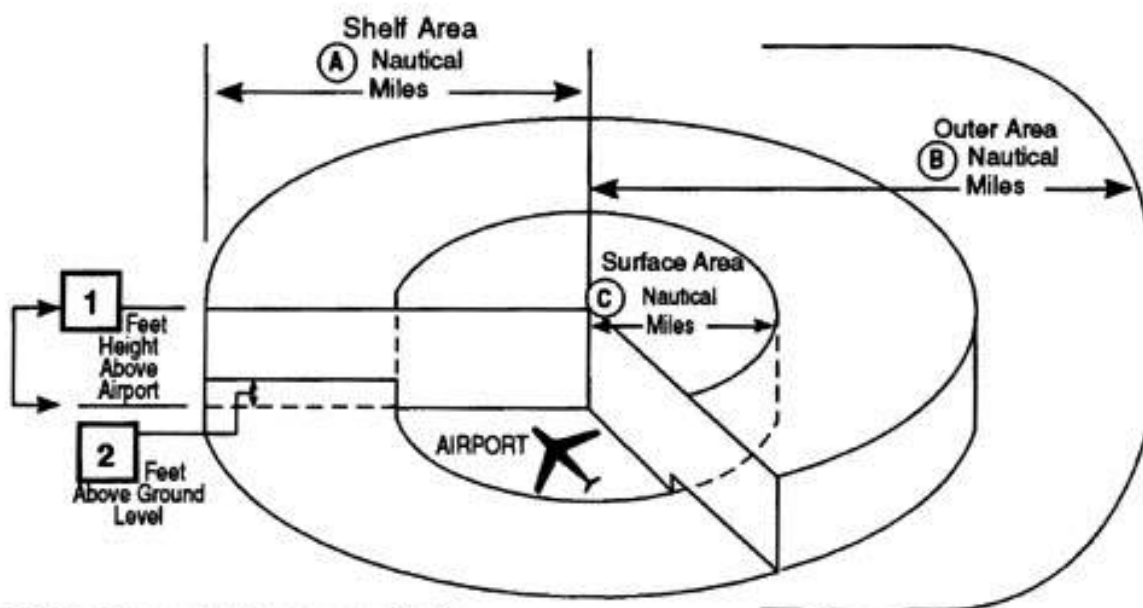

Services upon establishing two-way radio communication and radar contact:

Sequencing Arrivals

IFR/VFR Standard Separation

IFR/VFR Traffic Advisories and Conflict Resolution

VFR/VFR Traffic Advisories

IFR: Instrument Flight Rules
VFR: Visual Flight Rules

Figure 126. Class C Airspace © ASA